

PROFESSIONAL PNEUMATIC TOOLS

S

Cat. #
0119
01/2019



SUNMATCH
Professional Pneumatic Tools


Company Profile

- **Established** : in March 1985
- **Factory Location** : 296-1 Chung Shan Road, Chupei City, Hsinchu County 30281, Taiwan
- **Capital** : NT\$370,000,000.00 (US\$12,200,000.00)
- **Turnover** : US\$52,000,000.00
- **CEO** : Daniel Chen
- **Employee** : 215
- **Factory Land** : 6,612 m² (71,170 feet²)
- **Factory Floor** : 23,140 m² (249,077 feet²)


Our Daily Challenge : Make a change or die.

Our Expectation : Develop more tools covering different industries and make them to the highest quality standards.


We Define : Sunmatch as a manufacturing company and partner of many different brands.

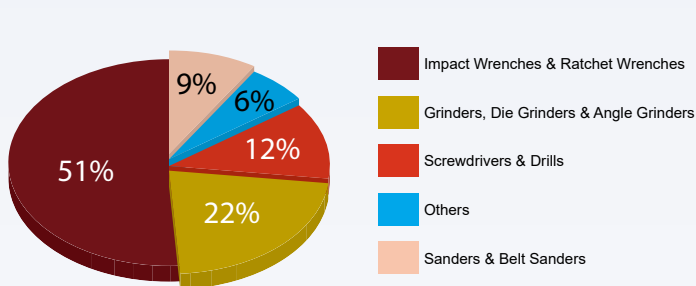


▲ Sunmatch Product Categories

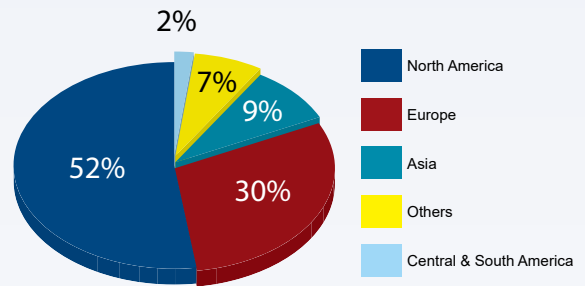

▲ Sunmatch Sales Area

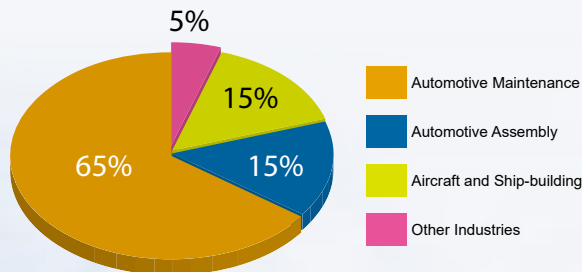

▲ Sunmatch Industries Categories

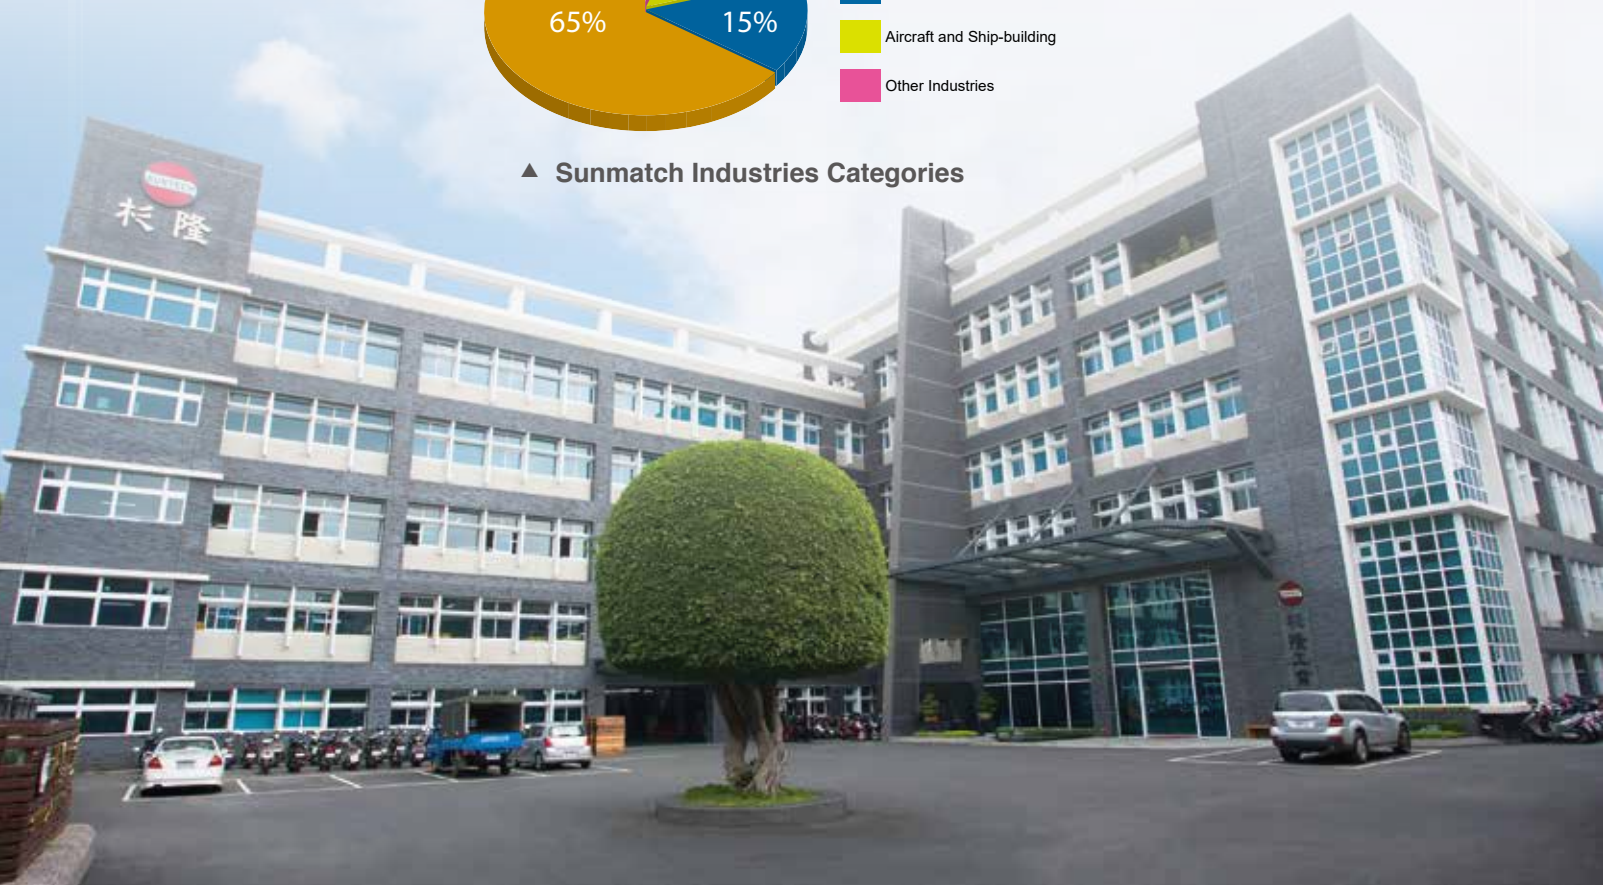

Sunmatch is a family owned company established in 1985, by three brothers.

Three Brothers

Daniel Chen is the eldest among three brothers and in charge of international marketing. The other two brothers, David and Peter, have mechanical engineering backgrounds and are in charge of developing and manufacturing new products. It has been a good combination to have three brothers working together, and as the old Chinese saying goes, "brothers working together will have enough power to break steel".

A dream

Our father was a bus driver with limited income. Our mother was selling vegetables in the traditional market to make a little money to help improve our living. Raised in a poor family, three brothers were encouraged by our father to study hard and work hard to be outstanding people. The dream is "united, brothers work together". Sunmatch allowed this dream to come true.

Dream comes true

At the time Sunmatch was established, David was the only one who knew a little about Pneumatic Tools, as he worked for a small company, named "FULLIN". In English, "FULLIN" means "luck is coming". But yet luck didn't come, soon "FULLIN" went bankrupt. David was in search of a new job. The three brothers decided to start manufacturing Pneumatic Tools and to locate the Sunmatch factory in their home town of Hsinchu. Peter was a teacher at a senior high school teaching mechanical engineering. Daniel had a background of international trade, as he had worked for a trading company. From that start, the three brothers worked together to make the dream come true.

Almost bankrupt

For the first ten years, Sunmatch made no money and almost went bankrupt because of cash flow. Sunmatch received orders from trading companies with very limited profits. In fact, Sunmatch was at the mercy of the trading companies. Make a change or die. Thank God, Sunmatch started growing with their direct export business to customers in countries worldwide. Sunmatch attended trade shows in different countries and talked to customers to help understand their needs.

Advice from customer

One of the reasons that Sunmatch made no profit was due to low prices, as Sunmatch only made DIY quality at that time. With low quality came low prices. One day, a customer said "Daniel, you have to make your own way in professional quality, or stay the same with DIY. I don't mind paying more if you could make better quality." We changed to higher quality products with higher prices. Thank God, Sunmatch is now on a new track with only Professional Quality!

A lesson of 25 years

It was a surprise to me when I was told that business relations could last 25 years. That was my first visit to the USA in August 1985, a few months after Sunmatch was established. My customer in the USA told me that his company had been doing business with a Japanese manufacturer for 25 years. 25 years was almost my whole life, as I was 30 years old that time. I was so impressed with such a long lasting relationship that I wanted to do the same with my customers. That was a great lesson for me. It has been 25 years since Sunmatch started in business and I am proud to say that I still keep a sound business relationship with my first customer.

An Expectation

I believe that I am a lucky man to have two brothers working with me on the same dream. With them, everything has become possible. The product range continues to improve while the quality has improved from DIY to Professional level. Even though Sunmatch went through a difficult stage in the beginning, we continue to grow. Our expectation is to develop more tools covering different industries and make them to the highest quality standards. At Sunmatch, we consider this a daily challenge. We define Sunmatch as a manufacturing company and partner of many different brands.

~ by Daniel Chen
2011/4/21

Contents

<i>Impact Wrenches</i>	4	<i>1/4" Industrial Air Screwdrivers</i>	122
<i>1/2" Impact Wrench Kits</i>	12	<i>Composite Housing Series</i>	130
<i>Mini Impact Wrenches</i>	13	<i>Screwdrivers</i>	132
<i>1/4" Hex Impact Drivers</i>	13	<i>1/4" Mini Air Drills</i>	135
<i>Stubby Impact Wrenches</i>	16	<i>Air Drills</i>	137
<i>Angle Impact Wrench</i>	20	<i>3/8" Heavy Duty Angle Drills</i>	143
<i>1" Heavy Duty Impact Wrenches</i>	28	<i>Air Metal Shears</i>	143
<i>1" Light Duty Impact Wrenches</i>	30	<i>1.0 HP Air Drills</i>	144
<i>Suspending Stand</i>	34	<i>0.5 HP Air Drills</i>	146
<i>Impact Ratchet Wrenches</i>	36	<i>Spot Drill</i>	149
<i>Stubby Ratchet Wrenches</i>	36	<i>Bead Breaker</i>	150
<i>Multi-Function Ratchet Wrench</i>	37	<i>Wheel Bolt Cleaner Kit</i>	151
<i>Ratchet Wrenches & Kits</i>	38	<i>Heavy-Duty Air Drill</i>	152
<i>Ratchet Wrenches & Impact Ratchet Wrenches</i>	40	<i>Heavy-Duty Industrial Pneumatic Drills</i>	153
<i>Utility Surface Blaster</i>	42	<i>Four Bolt Chipping Hammers</i>	154
<i>Die Grinders & Cut-Off Tool</i>	46	<i>Paving Breakers</i>	155
<i>Family Looking Tools</i>	47	<i>Air Scribe and Engraving Chisel</i>	156
<i>Die Grinders - Industrial</i>	48	<i>Wheel Bolt Cleaner Kit</i>	157
<i>Mini Die Grinders</i>	50	<i>Vibration Impact Wrench Kit</i>	158
<i>0.4 HP & 0.7 HP Die Grinders</i>	60	<i>Exhaust Hose Assembly</i>	159
<i>Angle Die Grinders</i>	61	<i>Comfort Grips</i>	160
<i>Vertical Grinders- Heavy Industrial</i>	62	<i>Air Hammers & Kits</i>	162
<i>Angle Grinder</i>	63	<i>Chipping Hammer</i>	165
<i>Angle Grinders - Heavy Industrial</i>	66	<i>Flux Chipper</i>	168
<i>7" Angle Grinders</i>	72	<i>Needle Scalars & Flux Chippers</i>	169
<i>Angle Grinders & Sander</i>	73	<i>Needle Scaler & Scaling Hammer</i>	170
<i>7" Angle Sanders & Polishers</i>	73	<i>Ratchet Wrenches</i>	170
<i>Water Feed Tool Series</i>	74	<i>Ratchet Wrenches Kit</i>	171
<i>Mini Angle Grinder & Kit</i>	76	<i>Impact Wrenches & Kit</i>	171
<i>Mini Angle Grinder / Cut-Off Tool</i>	77	<i>Impact Wrenches</i>	173
<i>Mini Cut-Off Tools</i>	78	<i>Air Drills</i>	175
<i>Cut-Off Tool</i>	79	<i>Screwdrivers & Kit</i>	177
<i>3" Reversible Cut-Off Tools</i>	81	<i>Straight Air Screwdrivers</i>	179
<i>1-1/4" Mini Random Orbital Nib Sander</i>	84	<i>Stripping Tool & Tire Buffers</i>	180
<i>Nib Removal Sanders</i>	86	<i>Family Looking Tools</i>	181
<i>3" Buffers</i>	87	<i>Die Grinders</i>	182
<i>3", 4" & 5" Gear-Driven Sanders / Polishers</i>	88	<i>Die Grinders & Cut-Off Tool</i>	183
<i>5"& 6" Two-Hand Sanders</i>	89	<i>Engraving Tools</i>	184
<i>Oil-Free Two-Hand Sanders</i>	89	<i>Micro Die Grinders</i>	184
<i>Random Orbital Palm Sander</i>	90	<i>Micro Die Grinder & Kit</i>	185
<i>5", 6" & 8" Gear-Driven Sanders / Polishers</i>	95	<i>Sanders</i>	186
<i>5"& 6" Vertical Sanders / Polishers</i>	96	<i>Air Riveters</i>	187
<i>7" Vertical Sander / Polisher</i>	97	<i>Saws</i>	188
<i>Reversible High Speed Sanders</i>	97	<i>Window Cut-Off Knives</i>	189
<i>Mini Tool Series - Composite</i>	98	<i>Punches</i>	189
<i>Mini Tool Series</i>	101	<i>Scraper</i>	190
<i>Belt Sanders</i>	108	<i>Spray Guns</i>	190
<i>Belt Sanders & Kit</i>	109	<i>Filer / Shears / Nibbler</i>	191
<i>Belt Sander Kit</i>	110	<i>Double Suction Cups & Kits</i>	192
<i>Versatility Belt Sander</i>	112	<i>Two Way Gun & Kit</i>	192
<i>Auto Shut-Off Screwdrivers</i>	114	<i>Other Tools & Accessories</i>	193
<i>1/4" Air Screwdrivers</i>	120	<i>Tool Index</i>	i



Impact Wrenches

Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- Push Button One Hand Forward / Reverse
- Available Optional Exhaust Hose Assembly
- Handle Exhaust
- 360° Swivel Air Inlet
- **Lightweight**
- **Low Noise 83 dB(A)**

Accessories (Optional)

Rubber Boot

#41-401255-0028

For SM-41-4012P & SM-43-4012P

#43-403355-0028

For SM-43-4033P & SM-43-4033PL



Air Regulator

(3 Different Speeds of Forward / Reverse)



Forward

Reverse

▲ One Hand - Forward / Reverse

SM-41-4012P

3/8" Impact Wrench



SM-43-4012P

1/2" Mini Impact Wrench



SM-43-4033P

1/2" Impact Wrench



SM-43-4033PL

1/2" Impact Wrench
- with 2" Ext. Anvil



Patent No.

US D572,991 S

DE 20 2006 014 757 U1 / DE 20 2007 004 347 U1

DE 20 2007 010 291 U1

TW M305737 / M316787 / D117453 / M321349

Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-41-4012P	11,000	3/8 (10)	-	430 (583)	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4012P	11,000	1/2 (13)	960 (1,302)	460 (624)	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4033P	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	7.2 (183)	4 (1.9)	83
SM-43-4033PL	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	9.3 (236)	4.4 (2.0)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- Push Button One Hand Forward / Reverse
- Available Optional Exhaust Hose Assembly
- Handle Exhaust
- 360° Swivel Air Inlet
- **Lightweight**
- **Low Noise 90 dB(A)**

Accessories (Optional)

Rubber Boot

#45-405165-0028

For SM-45-4051P, SM-47-4051P,
SM-45-4051PL & SM-47-4051PL



Overhose Assembly

EH-45-405158-11S

Overhose with Hose Clamp



SM-45-4051P

3/4" Impact Wrench



SM-47-4051P

1" Impact Wrench



SM-45-4051PL

3/4" Impact Wrench

- with 6" Ext. Anvil

SM-47-4051PL

1" Impact Wrench

- with 6" Ext. Anvil



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-45-4051P	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.5 (215)	7.5 (3.4)	90
SM-45-4051PL	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.5 (368)	8.8 (4.0)	90
SM-47-4051P	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.8 (223)	7.7 (3.5)	90
SM-47-4051PL	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.8 (376)	9.7 (4.4)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- Composite Motor Housing
- Lightweight
- Handle Exhaust
- **Low Noise 83 dB(A)**
- **Twin Hammer Clutch Mechanism**
- Available Optional Exhaust Hose Assembly
- Push Button One Hand Forward / Reverse

Accessories (Optional)

Rubber Boot

#41-402455-0028

For SM-41-4024P & SM-43-4024P

#43-403455-0028

For SM-43-4034P & SM-43-4034PL



Air Regulator

(3 Different Speeds of Forward / Reverse)



Forward

Reverse

▲ One Hand - Forward / Reverse

SM-41-4024P

3/8" Impact Wrench



SM-43-4024P

1/2" Mini Impact Wrench



SM-43-4034P

1/2" Impact Wrench



SM-43-4034PL

1/2" Impact Wrench
- with 2" Ext. Anvil



Specifications :

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-41-4024P	11,000	3/8 (10)	-	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4024P	11,000	1/2 (13)	960 (1,302)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4034P	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7.2 (183)	4 (1.9)	83
SM-43-4034PL	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	9.3 (236)	4.3 (1.97)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- Composite Motor Housing
- Lightweight
- Handle Exhaust
- **Low Noise 90 dB(A)**
- **Twin Hammer Clutch Mechanism**
- Available Optional Exhaust Hose Assembly
- Push Button One Hand Forward / Reverse

Accessories (Optional)

Rubber Boot

#45-405455-0028

For SM-45-4054P, SM-47-4054P,
SM-45-4054PL & SM-47-4054PL



Overhose Assembly

EH-45-405158-11S

Overhose with Hose Clamp



SM-45-4054P

3/4" Impact Wrench



SM-47-4054P

1" Impact Wrench



SM-45-4054PL

3/4" Impact Wrench

– with 6" Ext. Anvil



SM-47-4054PL

1" Impact Wrench

– with 6" Ext. Anvil

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-45-4054P	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.5 (215)	7.3 (3.3)	90
SM-45-4054PL	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.5 (368)	8.6 (3.9)	90
SM-47-4054P	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.8 (223)	7.5 (3.4)	90
SM-47-4054PL	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.5 (368)	9.5 (4.3)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material


Impact Wrenches

Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- Max. Torque : **Tightening 90-130 Nm** (66-96 ft.lbs) for SM-43-4012A, SM-43-4033A
Tightening 450-600 Nm (332-443 ft.lbs) for SM-45-4051A
Reverse 624 Nm (460 ft.lbs) for SM-43-4012A
Reverse 1,112 Nm (820 ft.lbs) for SM-43-4033A, SM-43-4033AL
Reverse 2,034 Nm (1,500 ft.lbs) for SM-45-4051A
- Available Optional Exhaust Hose Assembly
- Handle Exhaust
- 360° Swivel Air Inlet
- **Lightweight**
- **Low Noise**



▲ Operation of 1/2" Impact wrench with Torque Controlled



SM-43-4012A
1/2" Mini Impact Wrench



SM-43-4033A
1/2" Impact Wrench



Overhose Assembly

EH-45-405158-11S

Overhose with Hose Clamp



SM-43-4033AL
1/2" Impact Wrench
- with 2" Ext. Anvil



SM-45-4051A
3/4" Impact Wrench



Patent No.

US D572,991 S
 DE 20 2006 014 757 U1 / DE 20 2007 004 347 U1
 DE 20 2007 010 291 U1
 TW M305737 / M316787 / D117453 / M321349
 Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (F/R) (RPM)	Anvil Size Inch (mm)	Tightening Torque Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-43-4012A	7,500 / 12,000	1/2 (13)	66~96 (90~130)	460 (624)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4033A	3,500 / 8,000	1/2 (13)	66~96 (90~130)	820 (1,112)	1/4"	3/8 (10)	4 (113)	7.2 (183)	4 (1.9)	83
SM-43-4033AL	3,500 / 8,000	1/2 (13)	66~96 (90~130)	820 (1,112)	1/4"	3/8 (10)	4 (113)	9.3 (236)	4.4 (2)	83
SM-45-4051A	3,000 / 6,000	3/4 (19)	332~443 (450~600)	1,500 (2,034)	3/8"	1/2 (13)	7 (198)	8.5 (215)	7.5 (3.4)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite Motor Housing**
- **Pin Clutch Mechanism**
- Push Button One Hand Forward / Reverse
- Working Torque :
Range 50-650 ft.lbs (68-882 Nm)
- Max. Torque :
Reverse 1,000 ft.lbs (1,375 Nm)
- 360° Swivel Air Inlet
- **Lightweight 4 Lbs (1.9 Kg)**
- **Low Noise 83 dB(A)**

SM-43-4033P2

1/2" Impact Wrench
- Pin Clutch Mechanism



▲ Pin Clutch Mechanism



Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- Dial Style Forward / Reverse with 3 Speeds
in Forward and Full Power Reverse
- Handle Exhaust
- 360° Swivel Air Inlet

SM-43-4031P1

1/2" Impact Wrench



▲ 3 Different Speeds of Forward & Full Power of Reverse



SM-43-4031P3

1/2" Impact Wrench



▲ 3 Different Speeds of Forward & Full Power of Reverse



Patent No.

US D7,174,971 B1
DE 20 2005 020 352 U1
TW M290804
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-43-4033P2	7,000	1/2 (13)	1,000 (1,375)	50~650 (68~882)	1/4"	3/8 (10)	4 (113)	7.4 (189)	4 (1.9)	83
SM-43-4031P1	7,000	1/2 (13)	680 (922)	50~550 (68~746)	1/4"	1/2 (13)	4.4 (125)	8 (204)	4.8 (2.2)	88
SM-43-4031P3	7,000	1/2 (13)	680 (922)	50~550 (68~746)	1/4"	1/2 (13)	4.4 (125)	8 (204)	4.8 (2.2)	88

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- Composite Motor Housing
- **Twin Hammer Clutch Mechanism**
- Push Button One Hand Forward / Reverse
- Available Optional Exhaust Hose Assembly
- Handle Exhaust
- 360° Swivel Air Inlet
- **Lightweight**
- **Low Noise 83 dB(A)**

Air Regulator

(3 Different Speeds of Forward / Reverse)



Forward Reverse

▲ One Hand - Forward / Reverse



▲ EH-45-405158-11S (Option)

SM-41-4019P

3/8" Impact Wrench



SM-43-4019P

1/2" Mini Impact Wrench



SM-43-4039P

1/2" Impact Wrench



SM-43-4039PL

1/2" Impact Wrench
- with 2" Ext. Anvil



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-41-4019P	11,000	3/8 (10)	-	430 (583)	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4019P	11,000	1/2 (13)	960 (1,302)	460 (624)	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
SM-43-4039P	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	7.2 (183)	4 (1.9)	83
SM-43-4039PL	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	9.3 (236)	4.4 (2.0)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- Push Button One Hand Forward / Reverse
- Available Optional Exhaust Hose Assembly
- Handle Exhaust
- 360° Swivel Air Inlet
- **Lightweight**
- **Low Noise 90 dB(A)**

SM-45-4059P

3/4" Impact Wrench



SM-47-4059P

1" Impact Wrench



Air Regulator

(3 Different Speeds of Forward / Reverse)



▲ One Hand - Forward / Reverse



▲ EH-45-405158-11S (Option)

SM-45-4059PL

3/4" Impact Wrench
- with 6" Ext. Anvil



SM-47-4059PL

1" Impact Wrench
- with 6" Ext. Anvil

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-45-4059P	5,500	3/4 (19)	1,500 (2,034)	200~900 (271~1,224)	3/8"	1/2 (13)	7 (198)	8.5 (215)	7.5 (3.4)	90
SM-45-4059PL	5,500	3/4 (19)	1,500 (2,034)	200~900 (271~1,224)	3/8"	1/2 (13)	7 (198)	14.5 (368)	8.8 (4.0)	90
SM-47-4059P	5,500	1 (25.4)	1,500 (2,034)	200~900 (271~1,224)	3/8"	1/2 (13)	7 (198)	8.8 (223)	7.7 (3.5)	90
SM-47-4059PL	5,500	1 (25.4)	1,500 (2,034)	200~900 (271~1,224)	3/8"	1/2 (13)	7 (198)	14.5 (368)	9.7 (4.4)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1/2" Impact Wrench Kits

Features:

- **Composite Motor Housing**
- **Twin Hammer Clutch Mechanism**
- **Lightweight**
- 360° Swivel Air Inlet
- **Low Noise 83 dB(A)**

SM-43-4033PK3

1/2" Impact Wrench Kit

Kit Includes:

- 1 pc SM-43-4033P 1/2" Impact Wrench - Twin Hammer
- 10 pcs Sockets set
incl : 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm
- 1 pc Extension Bar
- 1 pc Universal Joint
- 1 pc Nipple
- 1 pc Blow Molded Case



SM-43-4033PK

1/2" Impact Wrench Kit



Kit Includes:

- 1 pc SM-43-4033P 1/2" Impact Wrench
- 3 pcs Standard Sockets set:
17, 19 & 21mm
- 3 pcs Deep (Long) Sockets set
with sleeve: 17, 19 & 21mm
- 1 pc Blow Molded Case

Patent No.

US D572,991 S
 DE 20 2007 004 347 U1
 TAIWAN No. M305737 / M316787
 TAIWAN No. D117453 / M321349
 Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-43-4033P	7,000	1/2 (13)	1,300 (1,756)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7.2 (183)	4 (1.9)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Mini Impact Wrenches

Features:

- **Composite Motor Housing**
(Double Injection only for SM-40-7253P & SM-41-7253P)
- Reversing Bar on Both Sides
- **Two Speed Trigger**
(Slow Speed When Pulled Halfway)
- Handle Exhaust
- **Patented Silencer 83 dB(A)**
- **0.5 HP**

Quiet Series

SM-41-7253P

3/8" Mini Impact Wrench



SM-41-7254P

3/8" Mini Impact Wrench



SM-40-7253P

1/4" Mini Impact Wrench



SM-40-7254P

1/4" Mini Impact Wrench

Patent No.

US D582,236 S / US D582,237 S
TW M346502 / M346497
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size (Inch (mm))	Maximum Torque (Ft-lbs (Nm))	Working Torque Range (Ft-lbs (Nm))	Air Inlet (NPT)	Hose Size ID (Inch (mm))	Average Air Consumption (CFM (L/Min))	Length (Inch (mm))	Weight (Lbs (Kg))	Noise Level (dB(A))
SM-40-7253P	11,000	1/4 (6)	75 (102)	25~70 (34~95)	1/4"	3/8 (10)	4 (113)	6.7 (170)	2.2 (1.0)	83
SM-40-7254P	11,000	1/4 (6)	75 (102)	25~70 (34~95)	1/4"	3/8 (10)	4 (113)	6.7 (170)	2.2 (1.0)	83
SM-41-7253P	11,000	3/8 (10)	100 (136)	25~90 (34~122)	1/4"	3/8 (10)	4 (113)	6.9 (174)	2.2 (1.0)	83
SM-41-7254P	11,000	3/8 (10)	100 (136)	25~90 (34~122)	1/4"	3/8 (10)	4 (113)	6.9 (174)	2.2 (1.0)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1/4" Hex Impact Drivers

Features:

- **Composite Motor Housing**
(Double Injection only for SM-48-7253P)
- Reverse Bar On Both Sides
- **Two Speed Trigger**
- **Patented Silencer 84 dB(A)**
- Handle Exhaust
- **0.5 HP**

Composite

SM-48-7253P

1/4" Hex Impact Driver



SM-48-7254P

1/4" Hex Impact Driver



Specifications:


Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Maximum Torque (Ft-lbs (Nm))	Working Torque Range (Ft-lbs (Nm))	Air Inlet (NPT)	Hose Size ID (Inch (mm))	Average Air Consumption (CFM (L/Min))	Length (Inch (mm))	Weight (Lbs (Kg))	Noise Level (dB(A))
SM-48-7253P	11,000	1/4	75 (102)	25~40 (34~54)	1/4"	3/8 (10)	4 (113)	7.1 (181)	2.2 (1.0)	84
SM-48-7254P	11,000	1/4	75 (102)	25~40 (34~54)	1/4"	3/8 (10)	4 (113)	7.1 (181)	2.2 (1.0)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Impact Wrenches

Features:

- **Composite Motor Housing**
- **Push Button One Hand Forward / Reverse**
- **Handle Exhaust (Silencer)**
- **Compact and Powerful**



SM-41-4015P

3/8" Stubby Impact Wrench
- Twin Hammer

SM-43-4015P

1/2" Stubby Impact Wrench
- Twin Hammer



SM-41-4015P2

3/8" Stubby Impact Wrench
- Jumbo Hammer

SM-43-4015P2

1/2" Stubby Impact Wrench
- Jumbo Hammer



▲ One Hand - Forward / Reverse



▲ 4 Different Speeds

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-41-4015P	10,000	3/8 (10)	-	700 (949)	25~350 (34~475)	1/4"	3/8 (10)	4.9 (139)	5.1 (130)	2.78 (1.26)
SM-43-4015P	10,000	1/2 (13)	1,033 (1,400)	700 (949)	25~350 (34~475)	1/4"	3/8 (10)	4.9 (139)	5.1 (130)	2.8 (1.27)
SM-41-4015P2	10,000	3/8 (10)	-	700 (949)	25~350 (34~475)	1/4"	3/8 (10)	4.9 (139)	4.7 (120)	2.64 (1.2)
SM-43-4015P2	10,000	1/2 (13)	1,033 (1,400)	700 (949)	25~350 (34~475)	1/4"	3/8 (10)	4.9 (139)	4.7 (120)	2.67 (1.21)

* Recommended Air Pressure at 90 PSI (6.2 Bar) * Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- Compact and Powerful
- Aluminum Handle with Steel Clutch Housing

Compact & Powerful



SM-41-4001

3/8" Stubby Impact Wrench

- Twin Hammer

SM-43-4001

1/2" Stubby Impact Wrench

- Twin Hammer



SM-41-4002

3/8" Stubby Impact Wrench

- Jumbo Hammer

SM-43-4002

1/2" Stubby Impact Wrench

- Jumbo Hammer

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-41-4001	10,000	3/8 (10)	-	500 (678)	25~300 (34~407)	1/4"	3/8 (10)	4 (113)	4.7 (120)	3.4 (1.54)
SM-43-4001	10,000	1/2 (13)	960 (1,302)	500 (678)	25~300 (34~407)	1/4"	3/8 (10)	4 (113)	4.7 (120)	3.4 (1.54)
SM-41-4002	10,000	3/8 (10)	-	500 (678)	25~300 (34~407)	1/4"	3/8 (10)	4 (113)	4.3 (109)	3.2 (1.44)
SM-43-4002	10,000	1/2 (13)	960 (1,302)	500 (678)	25~300 (34~407)	1/4"	3/8 (10)	4 (113)	4.3 (109)	3.2 (1.44)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Stubby Impact Wrench

Features:

- **Composite Motor Housing**
- **Handle Exhaust (Silencer)**
- **One Hand Forward / Reverse**
- **Compact and Powerful**



SM-43-4011P
1/2" Stubby Impact Wrench
- Twin Hammer

SM-43-4011P2
1/2" Stubby Impact Wrench
- Jumbo Hammer

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-4011P	9,000	1/2 (13)	864 (1,172)	450 (610)	25~230 (34~312)	1/4"	3/8 (10)	4.5 (127)	3.9 (98)	2.45 (1.11)
SM-43-4011P2	9,000	1/2 (13)	864 (1,172)	450 (610)	25~230 (34~312)	1/4"	3/8 (10)	4.5 (127)	3.7 (93)	2.38 (1.08)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be tested by Removing Damping Material

Stubby Impact Wrench

Features:

- **Composite Motor Housing**
- **Handle Exhaust (Silencer)**
- **One Hand Forward / Reverse**
- **Compact and Powerful**



SM-43-4013P

1/2" Stubby Impact Wrench
- **Jumbo Hammer**



SM-43-4013P2

1/2" Stubby Impact Wrench
- **Jumbo Hammer**

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-4013P	9,000	1/2 (13)	940 (1,275)	500 (678)	25~320 (34~434)	1/4"	3/8 (10)	5.8 (164)	4.4 (112)	2.56 (1.16)
SM-43-4013P2	8,000	1/2 (13)	940 (1,275)	500 (678)	25~320 (34~434)	1/4"	3/8 (10)	5.8 (164)	3.9 (98)	2.45 (1.11)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite** Motor Housing
- **Twin Hammer**
- Thumb Operated Forward and Reverse Switches Provide One Hand Operation
- Variable Speed Trigger

Air Regulator
(3 Different Speeds of Forward)



Reverse **Forward**

▲ One Hand - Forward / Reverse

SM-41-4114P
3/8" Impact Wrench




SM-43-4114P
1/2" Mini Impact Wrench



SM-43-4134P
1/2" Impact Wrench



SM-43-4134L
1/2" Impact Wrench
- with 2" Ext. Anvil

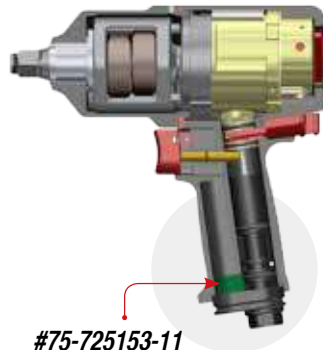

#75-725153-11
Muffer Material for Quiet Series (Optional)

▲ Low Noise Model for Europe
(Model No. ended with "Q",
Example : SM-43-4134PQ)

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Loosening Torque (Max.) Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-41-4114P	12,000	3/8 (10)	430 (583)	-	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6.2 (157)	2.73 (1.24)
SM-43-4114P	12,000	1/2 (13)	460 (624)	960 (1,302)	25~250 (34~338)	1/4"	3/8 (10)	4 (113)	6.2 (157)	2.73 (1.24)
SM-43-4134P	8,000	1/2 (13)	820 (1,112)	1,300 (1,756)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	7.4 (187)	4.21 (1.91)
SM-43-4134L	8,000	1/2 (13)	820 (1,112)	1,300 (1,756)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.47 (2.03)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite** Motor Housing
- **Twin Hammer**
- Thumb Operated Forward and Reverse Switches Provide One Hand Operation
- Variable Speed Trigger

Air Regulator

(3 Different Speeds of Forward)



Reverse

Forward

▲ One Hand - Forward / Reverse

SM-45-4154P

3/4" Impact Wrench



SM-47-4154P

1" Impact Wrench



SM-45-4154L

3/4" Impact Wrench

- with 6" Ext. Anvil



SM-47-4154L

1" Impact Wrench

- with 6" Ext. Anvil

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-45-4154P	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.7 (220)	7.59 (3.44)
SM-47-4154P	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	9 (228)	7.78 (3.53)
SM-45-4154L	5,500	3/4 (19)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.7 (373)	8.9 (4.04)
SM-47-4154L	5,500	1 (25.4)	1,500 (2,034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	15 (381)	9.74 (4.42)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Angle Impact Wrench

Features:

- Aluminum Motor Housing
- Composite Handle
- **Jumbo Hammer** Mechanism
- One Hand Forward / Reverse
- Handle Exhaust (Silencer)
- Compact and Powerful



SM-43-4010
1/2" Angle Impact Wrench
- **Jumbo Hammer**

▲ 3 Different Speeds of Forward & Full Power of Reverse

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-4010	8,500	1/2 (13)	240 (325)	20~170 (27~231)	1/4"	3/8 (10)	4 (113)	9.3 (237)	2.56 (1.16)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material


Impact Wrench

Features:

- **Composite** Motor Housing
- **Twin Hammer**
- Thumb Operated Forward and Reverse Switches Provide One Hand Operation
- Variable Speed Trigger



SM-45-4034P
3/4" Mini Impact Wrench

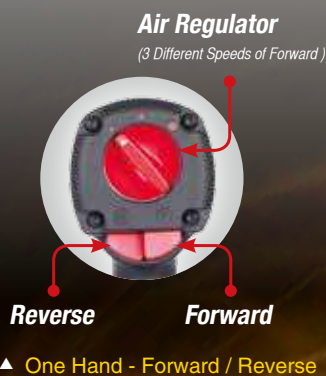

SM-45-4134P
3/4" Mini Impact Wrench



Specifications:


Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Loosening Torque (Max.) Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-45-4034P	8,000	3/4 (19)	820 (1,112)	1,300 (1,756)	50~580 (68~786)	1/4"	3/8 (10)	5.8 (164)	6.85 (174)	4.16 (1.89)
SM-45-4134P	8,000	3/4 (19)	820 (1,112)	1,300 (1,756)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	6.9 (176)	3.99 (1.81)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Impact Wrenches

Features:

- **Composite** Motor Housing
- Handle Exhaust (Silencer)
- **Twin Hammer / Pin Clutch**
- Reverse : Full Power
- Forward : 3 Different Speeds



Patent No.

TW M453569 / D159427
Patent Pending in Multi-Countries



SM-43-4133PL

1/2" Impact Wrench
- with 2" Ext. Anvil
- Twin Hammer

SM-41-4113P

3/8" Impact Wrench
- Twin Hammer



SM-43-4113P

1/2" Mini Impact Wrench
- Twin Hammer



SM-45-4153P

3/4" Impact Wrench
- Twin Hammer



SM-43-4133P1

1/2" Impact Wrench
- Twin Hammer



SM-47-4153P

1" Impact Wrench
- Twin Hammer



SM-43-4133P2

1/2" Impact Wrench
- Pin Clutch

Specifications :

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-41-4113P	11,000	3/8 (10)	-	430 (583)	25~250 (34-338)	1/4"	3/8 (10)	4 (113)	6.2 (157)	2.84 (1.29)
SM-43-4113P	11,000	1/2 (13)	-	460 (624)	25~250 (34-338)	1/4"	3/8 (10)	4 (113)	6.2 (157)	2.84 (1.29)
SM-43-4133P1	9,000	1/2 (13)	1,100 (1,492)	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	7.3 (186)	4.5 (2.04)
SM-43-4133P2	9,000	1/2 (13)	-	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	7.6 (192)	4.58 (2.08)
SM-43-4133PL	9,000	1/2 (13)	1,100 (1,492)	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	7.3 (186)	4.74 (2.15)
SM-45-4153P	5,500	3/4 (19)	-	1500 (2,034)	200~1200 (271~1627)	3/8"	1/2 (13)	7 (198)	8.7 (220)	8.35 (3.79)
SM-47-4153P	5,500	1 (25.4)	-	1500 (2,034)	200~1200 (271~1627)	3/8"	1/2 (13)	7 (198)	9 (229)	8.55 (3.88)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite** Motor Housing
- Handle Exhaust (Silencer)
- **Twin Hammer / Pin Clutch**
- Reverse : Full Power
- Forward : 3 Different Speeds



Patent No.

TW M453569 / D159426
Patent Pending in Multi-Countries



SM-43-4131P1
1/2" Impact Wrench
- Twin Hammer



SM-43-4131P2
1/2" Impact Wrench
- Pin Clutch



SM-43-4131PL
1/2" Impact Wrench
- with 2" Ext. Anvil
- Twin Hammer



SM-45-4151P
3/4" Impact Wrench
- Twin Hammer



SM-47-4151P
1" Impact Wrench
- Twin Hammer



SM-45-4151PL
3/4" Impact Wrench
- with 6" Ext. Anvil
- Twin Hammer

SM-47-4151PL
1" Impact Wrench
- with 6" Ext. Anvil
- Twin Hammer

Specifications :

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-4131P1	9,000	1/2 (13)	1,100 (1,492)	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	7.3 (186)	4.58 (2.08)
SM-43-4131P2	8,000	1/2 (13)	-	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	7.6 (192)	4.67 (2.12)
SM-43-4131PL	9,000	1/2 (13)	1,100 (1,492)	780 (1,054)	50~550 (68~746)	1/4"	3/8 (10)	4.4 (125)	9.4 (239)	4.89 (2.22)
SM-45-4151P	5,500	3/4 (19)	-	1,500 (2034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	8.7 (220)	8.77 (3.98)
SM-47-4151P	5,500	1 (25.4)	-	1,500 (2034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	9 (229)	9.01 (4.09)
SM-45-4151PL	5,500	3/4 (19)	-	1,500 (2034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	14.7 (374)	9.81 (4.45)
SM-47-4151PL	5,500	1 (25.4)	-	1,500 (2034)	200~1,200 (271~1,627)	3/8"	1/2 (13)	7 (198)	15 (381)	10.95 (4.97)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- Built-in Comfort Grip
- Handle Exhaust (Silencer)
- **Twin Hammer Clutch Mechanism**



SM-41-4017G
3/8" Impact Wrench



SM-43-4017G
1/2" Mini Impact Wrench



SM-43-4037G
1/2" Impact Wrench



SM-45-4057G
3/4" Impact Wrench



SM-47-4057G
1" Impact Wrench



SM-45-4057LG
3/4" Impact Wrench
- with 6" Ext. Anvil

SM-47-4057LG
1" Impact Wrench
- with 6" Ext. Anvil

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-41-4017G	11,000	3/8 (10)	400 (542)	25~300 (34~407)	1/4"	3/8 (10)	5 (142)	6.1 (156)	3.5 (1.6)
SM-43-4017G	11,000	1/2 (13)	400 (542)	25~300 (34~407)	1/4"	3/8 (10)	5 (142)	6.1 (156)	3.5 (1.6)
SM-43-4037G	9,000	1/2 (13)	900 (1,220)	50~700 (68~949)	1/4"	3/8 (10)	6 (170)	7.3 (185)	6 (2.7)
SM-45-4057G	5,500	3/4 (19)	1,500 (2,034)	200~1,300 (271~1,763)	3/8"	1/2 (13)	7 (198)	8.7 (220)	10.1 (4.6)
SM-47-4057G	5,500	1 (25.4)	1,500 (2,034)	200~1,300 (271~1,763)	3/8"	1/2 (13)	7 (198)	9 (228)	11 (5)
SM-45-4057LG	5,500	3/4 (19)	1,500 (2,034)	200~1,300 (271~1,763)	3/8"	1/2 (13)	7 (198)	14.7 (373)	12.1 (5.5)
SM-47-4057LG	5,500	1 (25.4)	1,500 (2,034)	200~1,300 (271~1,763)	3/8"	1/2 (13)	7 (198)	15 (381)	13 (5.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Impact Wrenches

Features:

- **Composite** Motor Housing
- Handle Exhaust (Silencer)
- **Twin Hammer**
- One Hand - Forward and Reverse

SM-43-4035P3

1/2" Impact Wrench

SM-45-4035P

3/4" Mini Impact Wrench



▲ One Hand - Forward / Reverse



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-4035P3	8,600	1/2 (13)	1,438 (1,950)	980 (1,329)	70~690 (95~936)	1/4"	3/8 (10)	6.5 (184)	6.7 (169)	4.14 (1.88)
SM-45-4035P	8,600	3/4 (19)	1,438 (1,950)	980 (1,329)	70~690 (95~936)	1/4"	3/8 (10)	6.7 (190)	6.9 (174)	4.3 (1.95)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Super Impact Wrench

Features:

- Composite Motor Housing
- Handle Exhaust
- Twin Hammer Clutch
- 7 Rotor Vanes - Composite
- Variable Speed Trigger
- BIAS Air Motor
- Forward : 3 Different Speeds
- Reverse : Full Power

SM-43-4038P

1/2" Super Impact Wrench



SM-43-4038PL

1/2" Impact Wrench
- with 2" Ext. Anvil



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Loosening Torque (Max.) Ft-lbs (Nm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-43-4038P	7,500	1/2 (13)	1,300 (1,756)	950 (1,288)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	7.3 (185)	4.3 (1.94)	89
SM-43-4038PL	7,500	1/2 (13)	1,300 (1,756)	950 (1,288)	50~580 (68~786)	1/4"	3/8 (10)	4 (113)	9.4 (238)	4.4 (2)	89

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material



1" Heavy Duty Impact Wrenches

Features:

- Side Support Handle for Better Control when Operate
- Handle with Inside Trigger
- with Steel Ring to Retain the Sockets
- **Twin Hammer Clutch / Pinless Clutch Mechanism**



SM-47-4071

1" Heavy Duty Impact Wrench

- Pinless Clutch
- Max. Torque : 2,200 Ft-lbs (2,983 Nm)
- Weight : 10.56 kgs



SM-47-4072

1" Heavy Duty Impact Wrench

- Twin Hammer
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 10 kgs



SM-47-4071L7

1" Heavy Duty Impact Wrench - Pinless Clutch

- Anvil Length : 7.6" (193 mm)
- Max. Torque : 2,200 Ft-lbs (2,983 Nm)
- Weight : 11.9 kgs

SM-47-4071L9

1" Heavy Duty Impact Wrench - Pinless Clutch

- Anvil Length : 9.6" (245 mm)
- Max. Torque : 2,200 Ft-lbs (2,983 Nm)
- Weight : 12.2 kgs



SM-47-4072L6

1" Heavy Duty Impact Wrench - Twin Hammer

- Anvil Length : 6.3" (159 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 10.9 kgs

SM-47-4072L8

1" Heavy Duty Impact Wrench - Twin Hammer

- Anvil Length : 8.3" (210 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 11 kgs



Specifications :

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Max. Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-47-4071	5,000	1 (25.4)	2,200 (2,983)	400~1,650 (542~2,237)	1/2"	1/2 (13)	10 (282)	13.6 (346)	23.3 (10.56)
SM-47-4072	5,000	1 (25.4)	2,500 (3,390)	400~1,800 (542~2,441)	1/2"	1/2 (13)	10 (282)	16.2 (412)	22 (10)
SM-47-4071L7	5,000	1 (25.4)	2,200 (2,983)	400~1,650 (542~2,237)	1/2"	1/2 (13)	10 (282)	19.6 (497)	26.2 (11.9)
SM-47-4071L9	5,000	1 (25.4)	2,200 (2,983)	400~1,650 (542~2,237)	1/2"	1/2 (13)	10 (282)	21.6 (548)	26.9 (12.2)
SM-47-4072L6	5,000	1 (25.4)	2,500 (3,390)	400~1,800 (542~2,441)	1/2"	1/2 (13)	10 (282)	18.7 (476)	24 (10.9)
SM-47-4072L8	5,000	1 (25.4)	2,500 (3,390)	400~1,800 (542~2,441)	1/2"	1/2 (13)	10 (282)	20.7 (527)	24.3 (11)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1" Heavy Duty Impact Wrench Kit

Heavy Duty Series

Features:

- Side Support Handle for Better Control when Operate
- Handle with Inside Trigger
- with Steel Ring to Retain the Sockets
- **Twin Hammer Clutch / Pinless Clutch Mechanism**
- with Sockets Set : 27, 30, 32, 33, 35, 36, 38, 41 mm



SM-47-4071L7K

1" Heavy Duty Impact Wrench Kit - **Pinless Clutch**

- Anvil Length : 7.6" (193 mm)
- Max. Torque : 2,200 Ft-lbs (2,983 Nm)

SM-47-4071L9K

1" Heavy Duty Impact Wrench Kit - **Pinless Clutch**

- Anvil Length : 9.6" (245 mm)
- Max. Torque : 2,200 Ft-lbs (2,983 Nm)

Kit Includes:

- 1 pc SM-47-4071L7 or SM-47-4071L9
- 8 pcs Sockets Set
incl : 27, 30, 32, 33, 35, 36, 38, 41 mm
- 1 pc Blow Molded Case

SM-47-4072L6K

1" Heavy Duty Impact Wrench Kit - **Twin Hammer**

- Anvil Length : 6.3" (159 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)

SM-47-4072L8K

1" Heavy Duty Impact Wrench Kit - **Twin Hammer**

- Anvil Length : 8.3" (210 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)

Kit Includes:

- 1 pc SM-47-4072L6 or SM-47-4072L8
- 8 pcs Sockets Set
incl : 27, 30, 32, 33, 35, 36, 38, 41 mm
- 1 pc Blow Molded Case

Specifications :

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Max. Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-47-4071L7	5,000	1 (25.4)	2,200 (2,983)	400~1,650 (542~2,237)	1/2"	1/2 (13)	10 (282)	19.6 (497)	26.2 (11.9)
SM-47-4071L9	5,000	1 (25.4)	2,200 (2,983)	400~1,650 (542~2,237)	1/2"	1/2 (13)	10 (282)	21.6 (548)	26.9 (12.2)
SM-47-4072L6	5,000	1 (25.4)	2,500 (3,390)	400~1,800 (542~2,441)	1/2"	1/2 (13)	10 (282)	18.7 (476)	24 (10.9)
SM-47-4072L8	5,000	1 (25.4)	2,500 (3,390)	400~1,800 (542~2,441)	1/2"	1/2 (13)	10 (282)	20.7 (527)	24.3 (11)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1" Light Duty Impact Wrenches

Features:

- Side Support Handle for Better Control when Operate
- Bended Handle with Inside Trigger
- with Steel Ring to Retain the Sockets
- **Twin Hammer Clutch Mechanism**
- **Lightweight**




▲ Inside Trigger



Crank Back Handle

Side Exhaust to Direct Exhaust Air away from the Side.

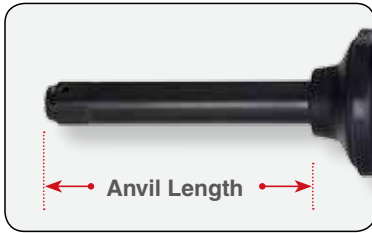

← Anvil Length →



▲ Safe Twist Handle Design

SM-47-4073

1" Impact Wrench

- Twin Hammer
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 6.5 kgs



SM-47-4073L7

1" Impact Wrench

- Twin Hammer
- Anvil Length : 7.1" (180 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.3 kgs

SM-47-4073L8

1" Impact Wrench

- Twin Hammer
- Anvil Length : 8.3" (210 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.5 kgs

SM-47-4073L7Q

1" Impact Wrench (Lower Noise)

- Twin Hammer
- Anvil Length : 7.1" (180 mm)
- Max. Torque : 1,600 Ft-lbs (2,170 Nm)
- Weight : 7.3 kgs

SM-47-4073L8Q

1" Impact Wrench (Lower Noise)

- Twin Hammer
- Anvil Length : 8.3" (210 mm)
- Max. Torque : 1,600 Ft-lbs (2,170 Nm)
- Weight : 7.5 kgs



Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-47-4073	6,000	1 (25.4)	1,800 (2,441)	200~1,500 (271~2,033)	1/2"	1/2 (13)	10 (282)	12.8 (324)	14.3 (6.5)	96
SM-47-4073L7	6,000	1 (25.4)	1,800 (2,441)	200~1,500 (271~2,033)	1/2"	1/2 (13)	10 (282)	18.3 (466)	16.1 (7.3)	96
SM-47-4073L8	6,000	1 (25.4)	1,800 (2,441)	200~1,500 (271~2,033)	1/2"	1/2 (13)	10 (282)	19.4 (492)	16.5 (7.5)	96
SM-47-4073L7Q	5,500	1 (25.4)	1,600 (2,170)	200~1,350 (271~1,831)	1/2"	1/2 (13)	10 (282)	18.3 (466)	16.1 (7.3)	89
SM-47-4073L8Q	5,500	1 (25.4)	1,600 (2,170)	200~1,350 (271~1,831)	1/2"	1/2 (13)	10 (282)	19.4 (492)	16.5 (7.5)	89



* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1" Light Duty Impact Wrenches

Features:

- Side Support Handle for Better Control when Operate
- with Steel Ring to Retain the Sockets
- **Twin Hammer Clutch Mechanism**
- **Lightweight**

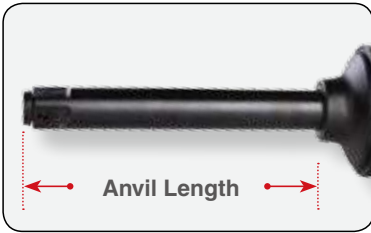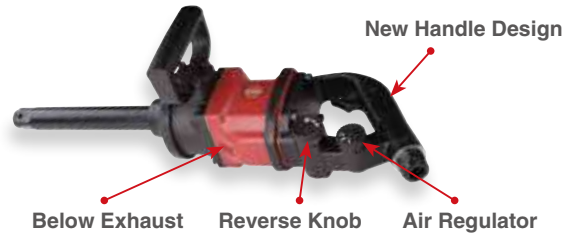

SM-47-4076

1" Impact Wrench

- Twin Hammer
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 6.3 kgs



SM-47-4076L7

1" Impact Wrench

- Twin Hammer
- Anvil Length : 7.3" (185 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.1 kgs



SM-47-4076L8

1" Impact Wrench

- Twin Hammer
- Anvil Length : 8.3" (210 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.2 kgs



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-47-4076	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	14.9 (378)	13.9 (6.3)	90
SM-47-4076L7	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	20.6 (522)	15.7 (7.1)	90
SM-47-4076L8	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	21.5 (547)	15.9 (7.2)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1" Heavy Duty Impact Wrenches

Features:

- 1" Heavy Duty Impact Wrench
- **Twin Hammer Clutch Mechanism**
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust



**3 Position Power Setting
in Forward and Reverse**




Anvil Length

Accessories (Optional)

Overhose Assembly

5D-6416S58-11S

Overhose with Cable Tie

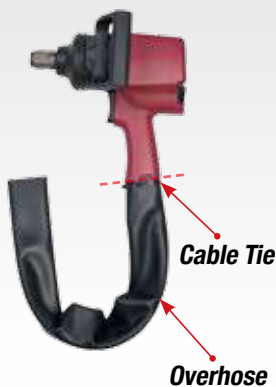

SM-47-4075 1" Impact Wrench

- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 9.9 kgs



SM-47-4075L6 1" Impact Wrench

- Anvil Length : 6.3" (160 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 10.7 kgs



SM-47-4075L8 1" Impact Wrench

- Anvil Length : 8.3" (210 mm)
- Max. Torque : 2,500 Ft-lbs (3,390 Nm)
- Weight : 11.1 kgs

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-47-4075	5,000	1 (25.4)	2,500 (3,390)	360~1,600 (488~2,169)	1/2"	1/2 (13)	10 (282)	11.4 (290)	21.8 (9.9)
SM-47-4075L6	5,000	1 (25.4)	2,500 (3,390)	360~1,600 (488~2,169)	1/2"	1/2 (13)	10 (282)	15.4 (391)	23.6 (10.7)
SM-47-4075L8	5,000	1 (25.4)	2,500 (3,390)	360~1,600 (488~2,169)	1/2"	1/2 (13)	10 (282)	17.4 (442)	24.5 (11.1)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

1" Light Duty Impact Wrenches

Features:

- 1" Light Duty Impact Wrench
- **Twin Hammer Clutch Mechanism**
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust



3 Position Power Setting
in Forward and Reverse




Anvil Length

Accessories (Optional)

Overhose Assembly

5D-6416S58-11S

Overhose with Cable Tie

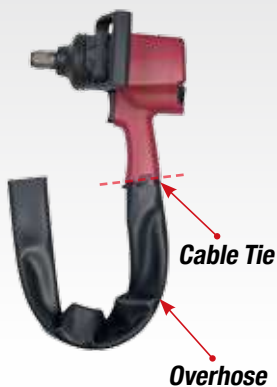

Cable Tie

Overhose



SM-47-4074

1" Impact Wrench

- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 6.3 kgs



SM-47-4074L7

1" Impact Wrench

- Anvil Length : 7.3" (185 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.1 kgs



SM-47-4074L8

1" Impact Wrench

- Anvil Length : 8.3" (210 mm)
- Max. Torque : 1,800 Ft-lbs (2,441 Nm)
- Weight : 7.3 kgs

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-47-4074	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	9.7 (247)	13.9 (6.3)
SM-47-4074L7	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	15.4 (390)	15.7 (7.1)
SM-47-4074L8	6,000	1 (25.4)	1,800 (2,441)	220~1,450 (300~1,965)	1/2"	1/2 (13)	10 (282)	16.3 (415)	16.1 (7.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* Max. Torque and Reverse Torque to be Tested by Removing Damping Material

Take A Load Off Users' Backs With Our Suspending Stands

Features:

Auto mechanic, tire shop workers and others who need to manipulate heavy objects will immediately recognize the value of this product. By suspending air tools and other items in midair, it protects users' backs and saves their time and strength. For details, please contact us today.



Demonstration on website :
<http://www.sunmatch.com/video.html>



Patent No.

TAIWAN No. 158779
 Patents pending in other countries

Specifications:


Model No.	Suspending Capacity Kg (Lbs)	Height Cm (Inch)	Gross Weight Kg (Lbs)
SM-0915	9~15 (19~33)	168 (66)	29 (63)
SM-1522	15~22 (33~48)	168 (66)	29 (63)

SM-0915

Suspending Stand
 - Capacity 9 ~ 15 Kgs (19 ~ 33 Lbs)

SM-1522

Suspending Stand
 - Capacity 15 ~ 22 Kgs (33 ~ 48 Lbs)

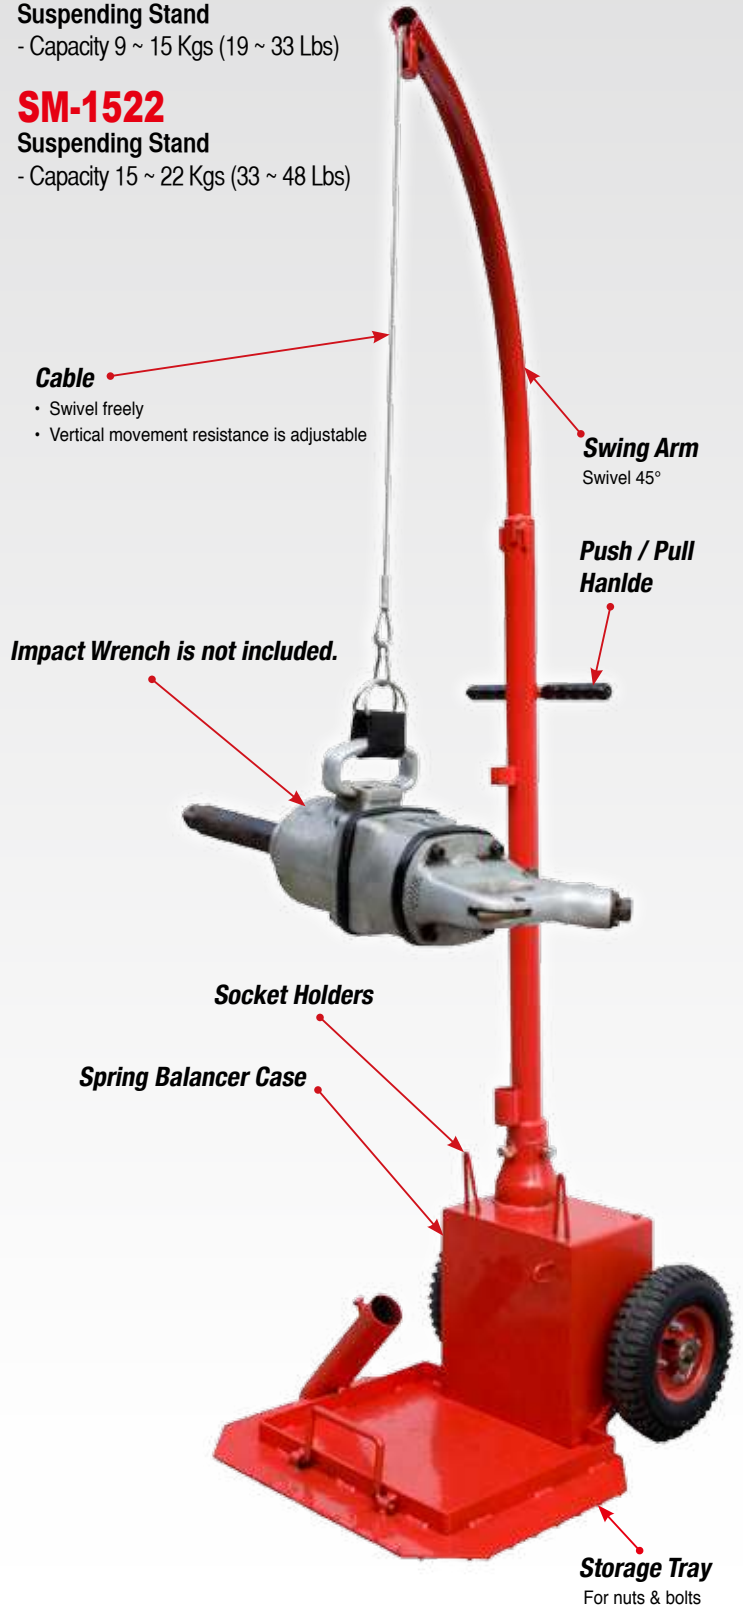



Impact Ratchet Wrenches

Features:

- **Pin Clutch Impact Mechanism** which Eliminates Torque Reaction, Saving Your Knuckles
- Three Times Faster than Standard Ratchets
- **Maximum Torque 90 ft.lbs (122 Nm)**



Stubby Ratchet Wrenches

Features:

- **Composite Motor Housing**
- Short & Compact Size
- **Available Wobble Anvil in 3/8" Anvil Size**
- Rear Exhaust
- **Patented Silencer 85 dB(A)**



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-33-3117	600	3/8 (9.5)	90 (122)	1/4"	3/8 (10)	4 (113)	11 (280)	2.82 (1.28)	90
SM-34-3117	600	1/2 (12.7)	90 (122)	1/4"	3/8 (10)	4 (113)	11 (280)	2.82 (1.28)	90
SM-32-3015	350	1/4 (6)	30 (40.7)	1/4"	3/8 (10)	4 (113)	5.2 (133)	1.1 (0.5)	85
SM-33-3015	350	3/8 (10)	30 (40.7)	1/4"	3/8 (10)	4 (113)	5.2 (133)	1.1 (0.5)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Multi-Function Ratchet Wrench

Features:

- Composite Motor Housing
- **1/4" & 3/8" Anvil Convertable**
- Slim, Compact Head Design
- Rear Exhaust
- **Patented Silencer 85 dB(A)**

Patent No.

TW M345679
Patent Pending in Multi-Countries

SM-32-3016 Multi-Function Ratchet Wrench



SM-32-3016K Multi-Function Ratchet Wrench Kit



#32-301640-11
1/4" & 3/8" Anvil



#32-301642-11
3/8" Anvil &
1/4" Bit Holder



(Optional)

#32-301641-11
1/4" Bit Holder



#32-301643-11
1/4" Anvil &
1/4" Bit Holder



(Optional)

#32-301620-11



#32-301620-12



#32-301621-11



#32-301621-12



Screwdriver Bits



SM-32-3016
Multi-Function Ratchet
Wrench

Kit includes:

- 1 pc SM-32-3016 Ratchet Wrench with open head
- 1 pc Reversible Ratchet Head 1/4" + 3/8"
- 1 pc 1/4" Screwdriver Bit holder
- 1 pc 1/4" Dr. Ergonomic Ratchet Handle (Forward/Fixed/Reverse)
- 10 pcs 1/4" Sockets Set (incl: 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm)
- 1 pc 1/4" Dr. Universal Joint
- 1 pc 1/4" Dr. Quick Release Bit Adapter
- 1 pc 100mm Quick Release Extension Bar
- 1 pc 1/4" Dr. Spinner Handle
- 21 pcs 25mm Insert Bit:
 - PH: 1, 2
 - PZ: 1, 2, 3
 - FD: 4, 5.5, 6.5, 8mm
 - Hex: 3, 4, 5, 6, 7mm
 - TX (Tamper)-Torx Security: 10, 15, 20, 25, 27, 30, 40mm

SM-32-3016K2 Multi-Function Ratchet Wrench Kit



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-32-3016	850	1/4 & 3/8 (6 & 10)	30 (40.7)	1/4"	3/8 (10)	4 (113)	6.1 (155)	1.1 (0.5)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Needle Bearing
- Thick Wall Ratchet Head
- Cushioned Grip
- **New Air Regulator**
- 360° Swivel Air Inlet (Only for SM-32-3024, SM-33-3024, SM-33-3023 & SM-34-3023)
- Rear Exhaust
- **Low Noise 79 dB(A)**

SM-32-3022

1/4" Baby Ratchet Wrench
- Full-Cage Gear Design

SM-33-3022

3/8" Baby Ratchet Wrench
- Full-Cage Gear Design



Quiet Series



▲ Operation of Ratchet Wrench

SM-32-3024

1/4" Mini Ratchet Wrench
- Full-Cage Gear Design

SM-33-3024

3/8" Mini Ratchet Wrench
- Full-Cage Gear Design



SM-33-3023

3/8" Air Ratchet Wrench

SM-34-3023

1/2" Air Ratchet Wrench



SM-33-3023K

3/8" Air Ratchet Wrench Kit

SM-34-3023K

1/2" Air Ratchet Wrench Kit

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-32-3022	200	1/4 (6)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7 (177)	1.1 (0.5)	79
SM-33-3022	200	3/8 (10)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7 (177)	1.1 (0.5)	79
SM-32-3024	200	1/4 (6)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7.7 (196)	1.1 (0.5)	79
SM-33-3024	200	3/8 (10)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7.7 (196)	1.1 (0.5)	79
SM-33-3023	150	3/8 (10)	50 (68)	10~50 (14~68)	1/4"	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	79
SM-34-3023	150	1/2 (13)	50 (68)	10~50 (14~68)	1/4"	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Ratchet Wrenches



▲ Operation of Ratchet Wrench

Features:

- Needle Bearing
- Thick Wall Ratchet Head
- Cushioned Grip
- New Air Regulator
- Throttle Lever Pressed to Flat
- Rotating Air Inlet
- **Rotating Rear Exhaust**
- **Low Noise 79 dB(A)**

SM-32-3012

1/4" Baby Ratchet Wrench
- Full-Cage Gear Design

SM-33-3012

3/8" Baby Ratchet Wrench
- Full-Cage Gear Design



Quiet Series



SM-32-3014

1/4" Mini Ratchet Wrench
- Full-Cage Gear Design

SM-33-3014

3/8" Mini Ratchet Wrench
- Full-Cage Gear Design



Rotating Air Inlet and Exhaust

▲ Rotating Rear Exhaust is not Available for U.S.A.



SM-33-3013

3/8" Air Ratchet Wrench

SM-34-3013

1/2" Air Ratchet Wrench

Patent No.

US D525,501 S
DE 20 2007 002 509 U1
TW D112522 / D112524 / M316779
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-32-3012	200	1/4 (6)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7 (177)	1.3 (0.6)	79
SM-33-3012	200	3/8 (10)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7 (177)	1.3 (0.6)	79
SM-32-3014	200	1/4 (6)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7.7 (196)	1.3 (0.6)	79
SM-33-3014	200	3/8 (10)	30 (41)	5~30 (7~41)	1/4"	3/8 (10)	4 (113)	7.7 (196)	1.3 (0.6)	79
SM-33-3013	150	3/8 (10)	50 (68)	10~50 (14~68)	1/4"	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	79
SM-34-3013	150	1/2 (13)	50 (68)	10~50 (14~68)	1/4"	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Ratchet Wrenches & Impact Ratchet Wrenches

Features:

- Needle Bearing
- Thick Wall Ratchet Head
- Ball Bearing
- Cushioned Grip
- Rear Exhaust

SM-32-3124A

1/4" Mini Ratchet Wrench
- Full-Cage Gear Design

SM-33-3124A

3/8" Mini Ratchet Wrench
- Full-Cage Gear Design



SM-33-3123A

3/8" Air Ratchet Wrench

SM-34-3123A

1/2" Air Ratchet Wrench



Features:


- **Pin Clutch Impact Mechanism** which Eliminates Torque Reaction, Saving Your Knuckles
- Three Times Faster than Standard Ratchets
- **Maximum Torque 90 ft.lbs (122 Nm)**

SM-33-3117A

3/8" Impact Ratchet Wrench

SM-34-3117A

1/2" Impact Ratchet Wrench



Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-32-3124A	200	1/4 (6)	30 (41)	5~30 (7~41)	1/4	3/8 (10)	4 (113)	7.7 (196)	1.1 (0.5)	80
SM-33-3124A	200	3/8 (10)	30 (41)	5~30 (7~41)	1/4	3/8 (10)	4 (113)	7.7 (196)	1.1 (0.5)	80
SM-33-3123A	150	3/8 (10)	50 (68)	10~50 (14~68)	1/4	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	86
SM-34-3123A	150	1/2 (13)	50 (68)	10~50 (14~68)	1/4	3/8 (10)	4 (113)	10.1 (256)	2.6 (1.2)	86
SM-33-3117A	600	3/8 (10)	90 (122)	20~70 (27~95)	1/4	3/8 (10)	4 (113)	11 (280)	2.82 (1.28)	90
SM-34-3117A	600	1/2 (13)	90 (122)	20~70 (27~95)	1/4	3/8 (10)	4 (113)	11 (280)	2.82 (1.28)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)



SUNMATCH
Professional Pneumatic Tools

Utility **Surface Blaster**

One Tool with Multi-Functions:

Wire Brush

(With wire brushes)

Rubber Eraser

(Patented)

Stripping Tool

(Single or double black wheels)

Patent No.

US 7,155,028 B1 / US 1,147,550 B2 / US D549,285 S / US D521,334 S / US D516,260 S

US 6,912,755 B2 / US 7,578,730 B2

DE 20 2005 007 270.2 / DE 20 2005 007 271.0 / DE 20 2005 002 317.5 / DE 20 2006 013 546.4

DE 20 2007 014 143 U1 / DE 203 14 978 U1 / DE 10 2007 048 480 B3

EU 000299052-0001

TW D113421 / D108995/ D109389/ M240301/ M270876 / M270877 / M257263 / M272622

M274199 / M275067 / M275057 / M280265 / M281768 / M305733 / M330154

Patent Pending in Multi-Countries



Utility Surface Blaster

Features:

- Different Type Wheels
(For the Preparation of Metal Surfaces Prior to Remedial Work)
- Safety Guard (Protect User from Debris / Sparks)
- **Adaptor (Patented)**
- **Rubber Eraser (Patented)**
- Safety Throttle Lever
- Rear Exhaust
- **Low Noise 83 dB(A)**



Wire Brush
(With wire brushes)



Rubber Eraser



Black Stripping
(Single or double black wheels)

SM-6903

Utility Surface Blaster (Tool Only)



Multi-Functions

SM-6902

Utility Surface Blaster (Tool Only)



Patent No.

US 7,155,028 B1 / US 1,147,550 B2 / US D549,285 S / US D521,334 S / US D516,260 S / US 6,912,755 B2 / US 7,578,730 B2
 DE 20 2005 007 270.2 / DE 20 2005 007 271.0 / DE 20 2005 002 317.5 / DE 20 2006 013 546.4
 DE 20 2007 014 143 U1 / DE 203 14 978 U 1 / DE 10 2007 048 480 B3
 EU 000299052-0001
 TW D113421 / D108995/ D109389/ M240301/ M270876 / M270877 / M257263 / M272622
 M274199 / M275067 / M275057 / M280265 / M281768 / M305733 / M330154
 Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6902	3,500	1/4"	3/8 (10)	3.9 (110)	10.7 (272)	2.6 (1.2)	83
SM-6903	3,500	1/4"	3/8 (10)	3.9 (110)	10.7 (272)	2.6 (1.2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Utility Surface Blaster Assembly

SM-6902K & SM-6903K

Utility Surface Blaster Kit

Includes:

- 1 pc Utility Surface Blaster
- 1 pc Blow Case

Accessories (Optional):

- #0511 11mm Wire Brush (Fine)
- #0523 23mm Wire Brush (Fine)
- #0711 11mm Wire Brush (Coarse)
- #0723 23mm Wire Brush (Coarse)
- SA-6902RW Rubber Eraser
- or SA-6903RW Rubber Eraser
- SA-6902RWW Water Based Paint Rubber Eraser
- or SA-6903RWW Water Based Paint Rubber Eraser
- SA-6902RH Adaptor for Rubber Eraser & 23mm Wire Brush
- or SA-6903RH Adaptor for Rubber Eraser & 23mm Wire Brush
- SA-6902WH Adaptor for 11mm Wire Brush
- or SA-6903WH Adaptor for 11mm Wire Brush
- SA-6902BW Black Strip Wheels (up to 6 pcs)
- SA-6902BHS Adaptor for Single Black Strip Wheel
- SA-6902BHD Adaptor for Double Black Strip Wheels



#0511
11mm Wire Brush (Fine)



#0711
11mm Wire Brush (Coarse)



#0523
23mm Wire Brush (Fine)



#0723
23mm Wire Brush (Coarse)




SA-6902BHS
Adaptor for Single Black Strip Wheel




SA-6902BHD
Adaptor for Double Black Strip Wheels



SA-6902BW
Black Strip Wheel



SA-6902BW
Double Black Strip Wheels



SA-6902WH Patented
SA-6903WH
Adaptor for 11mm Wire Brush



SA-6902RH Patented
SA-6903RH
Adaptor for Rubber Eraser or 23mm Wire Brush



SA-6902RW Patented
SA-6903RW
Rubber Eraser



SA-6902RWW Patented
SA-6903RWW
Water Based Paint Rubber Eraser



SM-6902K
Utility Surface Blaster Kit



SM-6903K
Utility Surface Blaster Kit

Black Stripping Tool

Features:

- Easily Attached onto Tool with Patented Adaptor
- **Quickly Change to 1 pc or 2 pcs Black Wheels for Stripping Job**
- Excellent for Cleaning Welds, Coating, Adhesive and Rust



Stripping Tool
(Single black wheel)



Stripping Tool
(Double black wheels)

Utility Surface Blaster

▼ Optional Accessories



#0511
11mm Wire Brush
(Fine)



#0711
11mm Wire Brush
(Coarse)



#0523
23mm Wire Brush
(Fine)



#0723
23mm Wire Brush
(Coarse)



SA-6902WH
SA-6903WH
Adaptor for 11mm
Wire Brush



SA-6902RH
SA-6903RH
Adaptor for Rubber
Eraser or 23mm Brush



SA-6902RW
SA-6903RW
Rubber Eraser

Everything in a carton box



▲ The White Box for SM-6902K-7

SM-6902K-7

Utility Surface Blaster Kit - Seven Pieces onto One

Includes:

Accessories (Optional):

- SM-6902 Utility Surface Blaster (3,500 RPM)
- #0511 11mm Wire Brush (Fine)
- #0523 23mm Wire Brush (Fine)
- #0711 11mm Wire Brush (Coarse)
- #0723 23mm Wire Brush (Coarse)
- SA-6902RW Rubber Eraser
- or SA-6903RW Rubber Eraser
- SA-6902RH Adaptor for Rubber Eraser & 23mm Wire Brush
- or SA-6903RH Adaptor for Rubber Eraser & 23mm Wire Brush
- SA-6902WH Adaptor for 11mm Wire Brush
- or SA-6903WH Adaptor for 11mm Wire Brush

SM-6902

Utility Surface Blaster (Tool Only)



Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6902	3,500	1/4"	3/8 (10)	3.9 (110)	11 (280)	2.6 (1.2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Utility Surface Blaster

SM-6903KF

Utility Surface Blaster Kit

Includes:

Accessories (Optional):

- 1 pc SM-6903 Utility Surface Blaster (3,500 RPM)
- 1 pc #0511 11mm Wire Brush (Fine)
- 1 pc #0523 23mm Wire Brush (Fine)
- 1 pc #0711 11mm Wire Brush (Coarse)
- 1 pc #0723 23mm Wire Brush (Coarse)
- 1 pc SA-6903RW Rubber Eraser
- 1 pc SA-6903RWW Water Based Paint Rubber Eraser
- 1 pc SA-6903RH Adaptor for Rubber Eraser & 23mm Wire Brush
- 1 pc SA-6903WH Adaptor for 11mm Wire Brush



Wire Brush



Rubber Eraser

(Two different type of rubber erasers)



SM-6903

Utility Surface Blaster (Tool Only)

SM-6903KF

Utility Surface Blaster Kit




Multi-Functions

▼ Optional Accessories



#0511
11mm Wire Brush (Fine)



SA-6903WH *Patented*
Adaptor for 11mm Wire Brush



#0711
11mm Wire Brush (Coarse)



SA-6903RH *Patented*
Adaptor for Rubber Eraser or 23mm Brush



#0523
23mm Wire Brush (Fine)



SA-6903RW *Patented*
Rubber Eraser



#0723
23mm Wire Brush (Coarse)



SA-6903RWW *Patented*
Water Based Paint Rubber Eraser

Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6903	3,500	1/4"	3/8 (10)	3.9 (110)	11 (280)	2.6 (1.2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Built-in Composite Grip
- Safety Throttle Lever
- Rear Exhaust with Silencer
- **0.3 HP Motor**

SM-53-5300

1/4" Mini Die Grinder
- 0.3 HP



SM-52-5300

1/4" 90° Angle Die Grinder
- 0.3 HP



SM-55-5300

1/4" 115° Angle Die Grinder
- 0.3 HP



SM-5E-5300

1/4" Extended Die Grinder
- 0.3 HP



SM-53-5300K

1/4" Mini Die Grinder Kit

Kit Includes:

- 1 pc SM-53-5300 Die Grinder
- 1 pc 1/8" (3mm) Collet
- 5 pcs 1/4" (6mm) Mounted Points
- 5 pcs 1/8" (3mm) Mounted Points



SM-52-5300K

1/4" 90° Angle Die Grinder Kit

Kit Includes:

- 1 pc SM-52-5300 Angle Die Grinder
- 1 pc 1/8" (3mm) Collet
- 5 pcs 1/4" (6mm) Mounted Points
- 5 pcs 1/8" (3mm) Mounted Points



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)	Noise Level dB(A)
SM-53-5300	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.3 (161)	0.9 (0.4)	0.3 (0.2)	84
SM-52-5300	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.5 (165)	1.1 (0.5)	0.3 (0.2)	84
SM-55-5300	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	7.8 (198)	1.1 (0.5)	0.3 (0.2)	84
SM-5E-5300	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	10.1 (256)	1.5 (0.7)	0.3 (0.2)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Family Looking Tools

Features:

- Built-in Composite Grip
- Safety Throttle Lever
- Rear Exhaust with Silencer
- **0.5 HP Motor**

SM-51-5100

1/4" Die Grinder - Full Size
- 0.5 HP



SM-54-5100

1/4" Die Grinder
- 0.5 HP



▲ Full-Cage Gear Design

SM-5F-5100

1/4" Extended Die Grinder
- 0.5 HP



SM-6K-5100

Pinstripe Removal Tool
- 0.5 HP



▲ Pad Size 3-1/2"

SM-29-5100

Straight Air Shear
- 0.5 HP



▲ Cutting Capacity Steel 1.2mm

SM-6F-5100

Low Speed Tire Buffer
- 0.5 HP



SM-5J-5100

3" Cut-Off Tool
- 0.5 HP



SM-76-5100

3/8" Straight Air Drill
- 0.5 HP



SM-7A-5100

SM-7B-5100
3/8" Straight Air Drill
- 0.5 HP



▲ Full-Cage Gear Design

SM-7L-5100

3/8" High Speed Straight Air Drill
- 0.5 HP



Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)	Noise Level dB(A)
SM-51-5100	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.5 (190)	1.5 (0.7)	0.5 (0.4)	84
SM-54-5100	4,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.8 (223)	2.0 (0.9)	0.5 (0.4)	84
SM-5F-5100	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.7 (348)	3.0 (1.4)	0.5 (0.4)	84
SM-6K-5100	4,000	-	1/4"	3/8 (10)	4 (113)	8.3 (210)	2.0 (0.9)	0.5 (0.4)	84
SM-6F-5100	2,500	-	1/4"	3/8 (10)	4 (113)	10 (255)	2.6 (1.2)	0.5 (0.4)	84
SM-29-5100	2,500	-	1/4"	3/8 (10)	4 (113)	10.6 (268)	2.6 (1.2)	0.5 (0.4)	84
SM-5J-5100	20,000	-	1/4"	3/8 (10)	4 (113)	8.1 (205)	1.8 (0.8)	0.5 (0.4)	84
SM-76-5100	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.1 (231)	2.4 (1.1)	0.5 (0.4)	84
SM-7A-5100	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.9 (225)	2.2 (1.0)	0.5 (0.4)	84
SM-7B-5100	4,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.9 (225)	2.2 (1.0)	0.5 (0.4)	84
SM-7L-5100	20,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.6 (218)	1.8 (0.8)	0.5 (0.4)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-50-240N

Die Grinder (24,000 RPM)
- Side Exhaust



- Built-in Comfort Grip

SM-50-241N

Die Grinder (24,000 RPM)
- Front Exhaust

SM-50-240S

Die Grinder (24,000 RPM)
- Side Exhaust



- Safety Throttle Lever
- Built-in Comfort Grip

SM-50-241S

Die Grinder (24,000 RPM)
- Front Exhaust

SM-50-250N

Die Grinder (24,000 RPM)
- Side Exhaust



- Built-in Comfort Grip

SM-50-250R

Die Grinder (24,000 RPM)
- Side Exhaust



- Ring Throttle
- Built-in Comfort Grip

SM-50-250S

Die Grinder (24,000 RPM)
- Side Exhaust



- Safety Throttle Lever
- Built-in Comfort Grip

SM-50-290N

Die Grinder (24,000 RPM)
- Side Exhaust



SM-50-291N

Die Grinder (24,000 RPM)
- Front Exhaust

SM-50-280R

Die Grinder (24,000 RPM)
- Side Exhaust



SM-50-281R

Die Grinder (24,000 RPM)
- Front Exhaust

- Ring Throttle

SM-50-290S

Die Grinder (24,000 RPM)
- Side Exhaust



SM-50-291S

Die Grinder (24,000 RPM)
- Front Exhaust

- Safety Throttle Lever

SM-5E-260N

Extended Die Grinder (24,000 RPM)
- Side Exhaust

SM-5E-261N

Extended Die Grinder (24,000 RPM)
- Front Exhaust



- Steel Housing

SM-5E-260R

Extended Die Grinder (24,000 RPM)
- Side Exhaust

SM-5E-261R

Extended Die Grinder (24,000 RPM)
- Front Exhaust



- Ring Throttle
- Steel Housing

SM-5E-260S

Extended Die Grinder (24,000 RPM)
- Side Exhaust

SM-5E-261S

Extended Die Grinder (24,000 RPM)
- Front Exhaust



- Safety Throttle Lever
- Steel Housing

Specifications:

Model No.	Throttle Type	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Power HP (Watt)	Max. Diameter of Mounted Point Inch (mm)	Max. Diameter of Carbide Burrs Inch (mm)	Collet Size Inch (mm)	Max. Air Cons. (m /Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-50-240N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.16 (0.53)	83
SM-50-241N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.16 (0.53)	83
SM-50-240S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.21 (0.55)	83
SM-50-241S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (172)	1.21 (0.55)	83
SM-50-250N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	7.6 (194)	1.65 (0.72)	83
SM-50-250S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	7.6 (194)	1.65 (0.75)	83
SM-50-250R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	8 (203)	1.67 (0.76)	83
SM-50-280R	Ring	24,000	1/4"	3/8 (10))	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.7 (169)	1.23 (0.56)	83
SM-50-281R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.7 (169)	1.23 (0.56)	83
SM-50-290N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.32 (0.6)	83
SM-50-291N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.32 (0.6)	83
SM-50-290S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.36 (0.62)	83
SM-50-291S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.36 (0.62)	83
SM-5E-260N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (0.98)	83
SM-5E-261N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (0.98)	83
SM-5E-260S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (1)	83
SM-5E-261S	Lever	24,000	1/4"	3/8 (10))	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (1)	83
SM-5E-260R	Ring	24,000	1/4"	3/8 (10))	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.7 (297)	1.98 (0.9)	83
SM-5E-261R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.7 (297)	1.98 (0.9)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Industrial Die Grinders



SM-5001

Heavy Duty Straight Die Grinder



Features:

- 12,000 RPM
- 0.5 HP
- Safety Lever
- Rear Exhaust

SM-53-5530

Industrial Die Grinder



Features:

- 32,000 RPM
- 0.5 HP
- Safety Lever
- Steel Motor Housing

SM-53-5522

Industrial Die Grinder



Features:

- 35,000 RPM
- 0.4 HP
- Rear Exhaust
- Low Vibration
- **Low Noise 75 dB(A)**

Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Hose Length Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)
SM-5001	12,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	-	12.5 (318)	2.9 (1.3)	0.5 (0.37)
SM-53-5530	32,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	-	7.1 (180)	1.6 (0.73)	0.5 (0.37)
SM-53-5522	35,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	29.5 (750)	7.9 (200)	1.3 (0.57)	0.4 (0.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Built-in Comfort Grip
- Safety Throttle Lever
- **New Rotating Rear Regulator**
- Rear Exhaust with Silencer
- Rotating Air Inlet
- Low Noise **79 dB(A)**




▲ Operation of Mini Die Grinder



EH-522SUB
Exhaust Hose Assembly (Optional)



#51224-28
8mm Collet

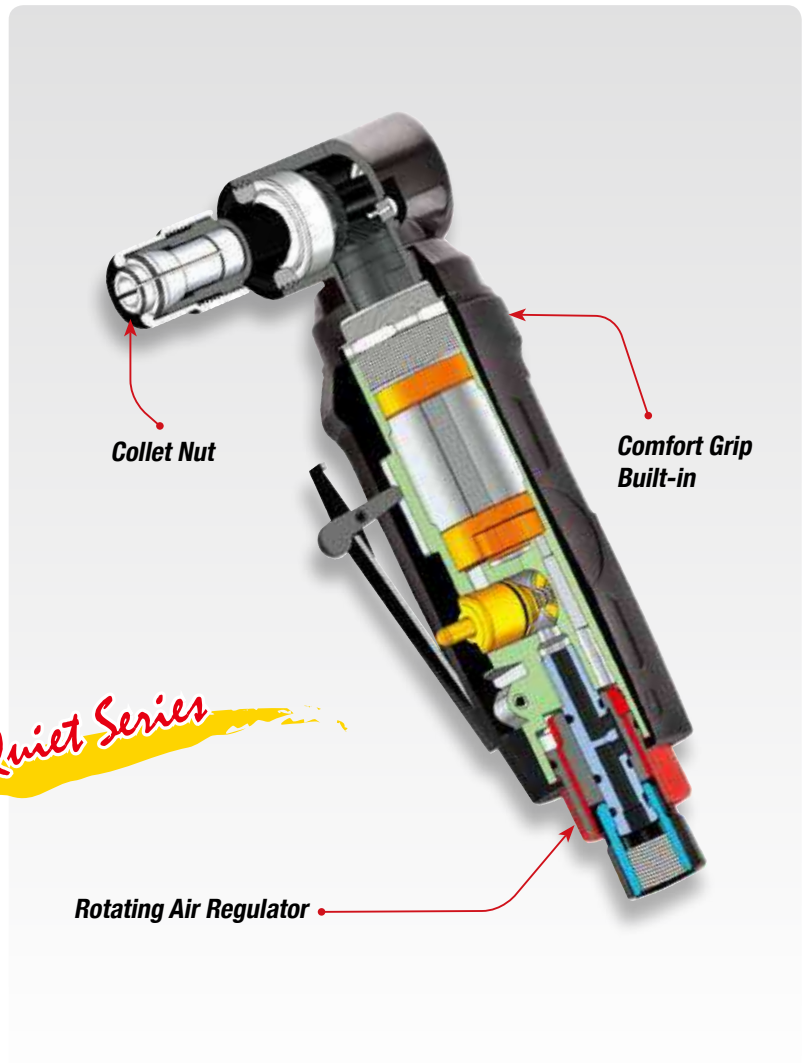

Patent No.

US 525 500S / US 7073774B2
EU 000 345723
TW D1190499 / M263196

Mini Die Grinders



SM-53-52251
1/4" Mini Die Grinder



SM-53-52252
1/4" Mini Die Grinder



SM-52-52251
1/4" 90° Angle Die Grinder



SM-52-52252
1/4" 90° Angle Die Grinder



SM-55-52251
1/4" 115° Angle Die Grinder



SM-55-52252
1/4" 115° Angle Die Grinder



SM-5E-52251
1/4" Extended Die Grinder



SM-5E-52252
1/4" Extended Die Grinder

Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-53-52251	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.4 (163)	0.9 (0.4)	79
SM-53-52252	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.4 (163)	0.9 (0.4)	79
SM-52-52251	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.5 (166)	1.1 (0.5)	79
SM-52-52252	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.5 (166)	1.1 (0.5)	79
SM-55-52251	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	7.9 (200)	1.1 (0.5)	79
SM-55-52252	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	7.9 (200)	1.1 (0.5)	79
SM-5E-52251	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	10.2 (258)	1.5 (0.7)	79
SM-5E-52252	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	10.2 (258)	1.5 (0.7)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* 8mm Collet is Available #51224-28

Mini Die Grinder Kits

Features:

- Built-in Comfort Grip
- Safety Throttle Lever
- Air Regulator on Top
- Rear Exhaust with Silencer
- Rotating Air Inlet
- Low Noise **77 dB(A)**



▲ Operation of Mini Die Grinder



SM-52-5227K 1/4" 90° Angle Die Grinder Kit

Kit Includes:

- 1 pc SM-52-5227 Angle Die Grinder
- 1 pc 1/8" (3mm) Collet
- 5 pcs 1/4" (6mm) Mounted Points
- 5 pcs 1/8" (3mm) Mounted Points



EH-522SUB
Exhaust Hose Assembly (Optional)

SM-53-5227K 1/4" Mini Die Grinder Kit

Kit Includes:

- 1 pc SM-53-5227 Die Grinder
- 1 pc 1/8" (3mm) Collet
- 5 pcs 1/4" (6mm) Mounted Points
- 5 pcs 1/8" (3mm) Mounted Points



#51224-28
8mm Collet

Kit Includes:

- 1 pc SM-52-5227 Angle Die Grinder
- 1 pc 1/4" Collet (Installed)
- 1 pc 6mm Collet
- 2 pcs 52227-11SUB Spanner Wrench
- 1 pc 2" Backing Pad (1/4"-20 Thread)
- 2 pcs 2" Coarse Surface Prep Pads
- 2 pcs 2" Med Surface Prep Pads
- 2 pcs 2" Fine Surface Prep Pads
- 2 pcs 2" #24 Grit Sanding Discs
- 2 pcs 2" #36 Grit Sanding Discs
- 2 pcs 2" #50 Grit Sanding Discs
- 1 pc blow Molded Case

SM-52-5227K2 1/4" 90° Angle Die Grinder Kit



Patent No.

US 525 500S / US 7073774B2
EU 000 345723
TW D1190499 / M263196 / M316780

Mini Die Grinders

SM-53-5227
1/4" Mini Die Grinder



SM-53-5229
1/4" Mini Die Grinder



SM-52-5227
1/4" 90° Angle Die Grinder



SM-52-5229
1/4" 90° Angle Die Grinder



SM-55-5227
1/4" 115° Angle Die Grinder



SM-55-5229
1/4" 115° Angle Die Grinder



SM-5E-5227
1/4" Extended Die Grinder



SM-5E-5229
1/4" Extended Die Grinder



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-53-5227	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.3 (159)	0.9 (0.4)	77
SM-53-5229	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.3 (159)	0.9 (0.4)	77
SM-52-5227	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.5 (165)	1.1 (0.5)	77
SM-52-5229	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.5 (165)	1.1 (0.5)	77
SM-55-5227	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	7.8 (197)	1.1 (0.5)	77
SM-55-5229	20,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	7.8 (197)	1.1 (0.5)	77
SM-5E-5227	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	10.1 (256)	1.5 (0.7)	77
SM-5E-5229	25,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	10.1 (256)	1.5 (0.7)	77

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* 8mm Collet is Available #51224-28

Features:

- Built-in Comfort Grip
- Air Regulator on Top
- Safety Throttle Lever
- Rear Exhaust with Silencer
- Rotating Air Inlet
- **Low Noise 79 dB(A)**

Patent No.

US 525 500S / DE20 2006 016 578U1
EU 000 345723
TW D1190499 / M302447 / M308838 / M316780

SM-51-3011B

1/4" Die Grinder - Full Size



SM-51-3011BK
1/4" Die Grinder Kit

SM-54-3011B


1/4" Die Grinder



▲ Full-Cage Gear Design

SM-5F-3011B

1/4" Extended Die Grinder



SM-6K-3011B

Pinstripe Removal Tool



▲ Pad Size 3-1/2"

SM-29-3011B

Straight Air Shear



▲ Cutting Capacity Steel 1.2mm

SM-6F-3011B

Low Speed Tire Buffer



SM-5J-3011B

3" Cut-Off Tool



SM-76-3011B

3/8" Straight Air Drill



SM-7A-3011B

SM-7B-3011B

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-7L-3011B

3/8" High Speed Straight Air Drill



Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-51-3011B	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.5 (0.7)	79
SM-54-3011B	4,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.0 (0.9)	79
SM-5F-3011B	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.7 (348)	2.9 (1.3)	79
SM-6K-3011B	4,000	-	1/4"	3/8 (10)	4 (113)	8.2 (209)	1.8 (0.8)	79
SM-6F-3011B	2,500	-	1/4"	3/8 (10)	4 (113)	10.0 (254)	2.4 (1.1)	79
SM-29-3011B	2,500	-	1/4"	3/8 (10)	4 (113)	10.4 (264)	2.4 (1.1)	79
SM-5J-3011B	20,000	-	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
SM-76-3011B	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.7 (222)	2.2 (1.0)	79
SM-7A-3011B	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7B-3011B	4,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7L-3011B	20,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	1.5 (0.7)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Built-in Comfort Grip
- Air Regulator on Top
- Safety Throttle Lever
- Rear Exhaust with Silencer
- Rotating Air Inlet
- **Low Noise 79 dB(A)**

SM-51-3011X

1/4" Die Grinder - Full Size

Patent No.

US 525 498S / US 525 499S / DE20 2006 016 578U1
EU 000 345707 / EU 000 345715
TW D115820 / M302447 / M308838 / M316780



SM-54-3011X


1/4" Die Grinder



▲ Full-Cage Gear Design


SM-5F-3011X

1/4" Extended Die Grinder



SM-6K-3011X

Pinstripe Removal Tool



▲ Pad Size 3-1/2"

SM-29-3011X

Straight Air Shear



▲ Cutting Capacity Steel 1.2mm

SM-6F-3011X

Low Speed Tire Buffer



SM-5J-3011X

3" Cut-Off Tool



SM-76-3011X

3/8" Straight Air Drill



SM-7A-3011X

SM-7B-3011X

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-7L-3011X

3/8" High Speed Straight Air Drill



Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-51-3011X	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.5 (0.7)	79
SM-54-3011X	4,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.0 (0.9)	79
SM-5F-3011X	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.7 (348)	2.9 (1.3)	79
SM-6K-3011X	4,000	-	1/4"	3/8 (10)	4 (113)	8.2 (209)	1.8 (0.8)	79
SM-6F-3011X	2,500	-	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
SM-29-3011X	2,500	-	1/4"	3/8 (10)	4 (113)	10.4 (264)	2.4 (1.1)	79
SM-5J-3011X	20,000	-	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
SM-76-3011X	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.7 (222)	2.2 (1.0)	79
SM-7A-3011X	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7B-3011X	4,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7L-3011X	20,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	1.5 (0.7)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Built-in Comfort Grip
- Safety Throttle Lever
- Rotating Rear Regulator
- Rotating Air Inlet
- **Low Noise 79 dB(A)**

SM-51-3011Y

1/4" Die Grinder - Full Size



Patent No.

US 525 500S / US 7073774B2 / EU 000 345723
TW D1190499 / M263196

SM-54-3011Y


1/4" Die Grinder



▲ Full-Cage Gear Design

SM-5F-3011Y

1/4" Extended Die Grinder



SM-6K-3011Y

Pinstripe Removal Tool



▲ Pad Size 3-1/2"

SM-29-3011Y

Straight Air Shear



▲ Cutting Capacity Steel 1.2mm

SM-6F-3011Y

Low Speed Tire Buffer



SM-5J-3011Y

3" Cut-Off Tool



SM-76-3011Y

3/8" Straight Air Drill



SM-7A-3011Y

SM-7B-3011Y

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-7L-3011Y

3/8" High Speed Straight Air Drill



Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-51-3011Y	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.5 (0.7)	79
SM-54-3011Y	4,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.0 (0.9)	79
SM-5F-3011Y	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.7 (348)	2.9 (1.3)	79
SM-6K-3011Y	4,000	-	1/4"	3/8 (10)	4 (113)	8.9 (226)	1.8 (0.8)	79
SM-6F-3011Y	2,500	-	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
SM-29-3011Y	2,500	-	1/4"	3/8 (10)	4 (113)	10.4 (264)	2.4 (1.1)	79
SM-5J-3011Y	20,000	-	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
SM-76-3011Y	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.5 (241)	2.2 (1.0)	79
SM-7A-3011Y	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7B-3011Y	4,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7L-3011Y	20,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	1.5 (0.7)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Family Looking Tools

Features:

- Built-in Comfort Grip
- Safety Throttle Lever
- Rotating Rear Regulator
- Rotating Air Inlet
- **Low Noise 79 dB(A)**

SM-51-3011Z

1/4" Die Grinder - Full Size



Patent No.

US 525 498S / US 7073774B2 / EU 000 345715
TW D115820 / M263196

SM-54-3011Z

1/4" Die Grinder



▲ Full-Cage Gear Design

SM-5F-3011Z

1/4" Extended Die Grinder



SM-6K-3011Z

Pinstripe Removal Tool



▲ Pad Size 3-1/2"

SM-29-3011Z

Straight Air Shear



▲ Cutting Capacity Steel 1.2mm

SM-6F-3011Z

Low Speed Tire Buffer



SM-5J-3011Z

3" Cut-Off Tool



SM-76-3011Z

3/8" Straight Air Drill



SM-7A-3011Z

SM-7B-3011Z

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-7L-3011Z

3/8" High Speed Straight Air Drill



Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-51-3011Z	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.5 (0.7)	79
SM-54-3011Z	4,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.0 (0.9)	79
SM-5F-3011Z	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.7 (348)	2.9 (1.3)	79
SM-6K-3011Z	4,000	-	1/4"	3/8 (10)	4 (113)	8.9 (226)	1.8 (0.8)	79
SM-6F-3011Z	2,500	-	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
SM-29-3011Z	2,500	-	1/4"	3/8 (10)	4 (113)	10.4 (264)	2.4 (1.1)	79
SM-5J-3011Z	20,000	-	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
SM-76-3011Z	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.5 (241)	2.2 (1.0)	79
SM-7A-3011Z	2,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7B-3011Z	4,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.2 (1.0)	79
SM-7L-3011Z	20,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.3 (236)	1.5 (0.7)	79

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Family Looking Tools

Features:

- **Composite Motor Housing**
- Full-Size Square Handle
- Safety Throttle Lever
- Rear Exhaust
- **Low Noise 83 dB(A)**
- **0.5 HP**

SM-572P

1/4" Air Die Grinder



SM-575P

1/4" Air Die Grinder



▲ Full-Cage Gear Design



EH-512SUB

Exhaust Hose Assembly (Optional)



▲ Operation of Die Grinder

SM-572FP

1/4" Extended Die Grinder



SM-671P

Low Speed Tire Buffer



SM-576P

3" Cut-Off Tool



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-572P	23,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	6.7 (170)	1.2 (0.5)	83
SM-575P	4,500	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	8.3 (210)	1.3 (0.6)	83
SM-572FP	23,000	1/4 (6) or 1/8 (3)	1/4"	3/8 (10)	4 (113)	13 (330)	2.6 (1.2)	83
SM-671P	2,600	-	1/4"	3/8 (10)	4 (113)	9.3 (237)	1.9 (0.9)	83
SM-576P	22,000	3 (75)	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.5 (0.7)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Die Grinders - Industrial

Features:

- **1.0 HP Motor**
- Safety Throttle Lever
- Rear Exhaust
- Erickson Collet
(Only for SM-50-5200,
SM-5E-5200 & SM-52-5201)



▲ Industry Standard Erickson Collet

#50-500228-11
#50-500228-13
#50-500228-16
#50-500228-18

1.0 HP



SM-50-5200

Die Grinder



SM-5E-5200

Extended Die Grinder



SM-52-5201

Angle Die Grinder



SM-52-5200

Angle Die Grinder

Specifications :

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)
SM-50-5200-14	20,000	1/4	1/4"	3/8 (10)	5.3 (150)	7.9 (200)	1.8 (0.8)	1.0 (0.7)
SM-50-5200-6	20,000	6 mm	1/4"	3/8 (10)	5.3 (150)	7.9 (200)	1.8 (0.8)	1.0 (0.7)
SM-50-5200-8	20,000	8 mm	1/4"	3/8 (10)	5.3 (150)	7.9 (200)	1.8 (0.8)	1.0 (0.7)
SM-5E-5200-14	20,000	1/4	1/4"	3/8 (10)	5.3 (150)	13 (330)	2.6 (1.2)	1.0 (0.7)
SM-5E-5200-6	20,000	6 mm	1/4"	3/8 (10)	5.3 (150)	13 (330)	2.6 (1.2)	1.0 (0.7)
SM-5E-5200-8	20,000	8 mm	1/4"	3/8 (10)	5.3 (150)	13 (330)	2.6 (1.2)	1.0 (0.7)
SM-52-5201-14	12,000	1/4	1/4"	3/8 (10)	5.3 (150)	8.3 (212)	2.6 (1.2)	1.0 (0.7)
SM-52-5201-6	12,000	6 mm	1/4"	3/8 (10)	5.3 (150)	8.3 (212)	2.6 (1.2)	1.0 (0.7)
SM-52-5201-8	12,000	8 mm	1/4"	3/8 (10)	5.3 (150)	8.3 (212)	2.6 (1.2)	1.0 (0.7)
SM-52-5200-14	12,000	1/4	1/4"	3/8 (10)	5.3 (150)	8.3 (212)	2.6 (1.2)	1.0 (0.7)
SM-52-5200-6	12,000	6 mm	1/4"	3/8 (10)	5.3 (150)	8.3 (212)	2.6 (1.2)	1.0 (0.7)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

0.4 HP & 0.7 HP Die Grinders

Features:

- 0.4 HP & 0.7 HP Motor
- Safety Throttle Lever
- Rear Exhaust
- Erickson Collet

SM-5125A
1/4" Die Grinder
- 25,000 RPM



SM-5130A
1/4" Die Grinder
- 30,000 RPM

0.4 HP

SM-5225B
1/4" Die Grinder
- 25,000 RPM



SM-5230B
1/4" Die Grinder
- 30,000 RPM

SM-5115C
1/4" Die Grinder
- 15,000 RPM

SM-5118C
1/4" Die Grinder
- 18,000 RPM

SM-5218D
1/4" Die Grinder
- 18,000 RPM

SM-5220D
1/4" Die Grinder
- 20,000 RPM

SM-5120C
1/4" Die Grinder
- 20,000 RPM



0.7 HP



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Length Inch (mm)	Weight Lbs (Kg)	Power Watt (HP)
SM-5125A	25,000	1/4 (6)	1/4"	1/4 (6)	3.2 (91)	6.7 (170)	0.9 (0.4)	298 (0.4)
SM-5130A	30,000	1/4 (6)	1/4"	1/4 (6)	3.2 (91)	6.7 (170)	0.9 (0.4)	298 (0.4)
SM-5225B	25,000	1/4 (6)	1/4"	1/4 (6)	3.2 (91)	7.3 (185)	1.1 (0.5)	298 (0.4)
SM-5230B	30,000	1/4 (6)	1/4"	1/4 (6)	3.2 (91)	7.3 (185)	1.1 (0.5)	298 (0.4)
SM-5115C	15,000	1/4 (6)	1/4"	3/8 (10)	4.4 (125)	8.3 (210)	1.8 (0.8)	522 (0.7)
SM-5118C	18,000	1/4 (6)	1/4"	3/8 (10)	4.6 (130)	8.3 (210)	1.8 (0.8)	522 (0.7)
SM-5120C	20,000	1/4 (6)	1/4"	3/8 (10)	4.8 (136)	8.3 (210)	1.8 (0.8)	522 (0.7)
SM-5218D	18,000	1/4 (6)	1/4"	3/8 (10)	4.8 (136)	7.6 (193)	2.2 (1.0)	522 (0.7)
SM-5220D	20,000	1/4 (6)	1/4"	3/8 (10)	5.2 (147)	7.6 (193)	2.2 (1.0)	522 (0.7)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Die Grinders

Features:

- **0.5 HP** Motor
- Safety Throttle Lever
- Rear Exhaust



SM-52-301B

1/4" 90° Angle Die Grinder
- Built-in Comfort Grip



SM-52-512B

1/4" 90° Angle Die Grinder



SM-52-301X

1/4" 90° Angle Die Grinder
- Built-in Comfort Grip

Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)
SM-52-301B	20,000	1/4 (6)	1/4"	3/8 (10)	3.3 (93)	7.2 (183)	1.8 (0.8)	0.5 (0.37)
SM-52-512B	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	7.3 (186)	1.8 (0.8)	0.5 (0.37)
SM-52-301X	20,000	1/4 (6)	1/4"	3/8 (10)	3.3 (93)	7.2 (183)	1.8 (0.8)	0.5 (0.37)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:


- Stainless Steel **Governor for Reliability and Maintaining Speed under Load**
- **Safety Lever**
- **Side Exhaust**
- **3.0 HP or 4.0 HP** Motor for Extra Stall Resistance
- **Best for: Extra Heavy Duty Continuous Material Removal and Grinding**



Silencer

▲ with Silencer to Reduce Noise (Optional)

#5G-321V20 (Silencer for 3.0 HP)
#5H-421V20 (Silencer for 4.0 HP)

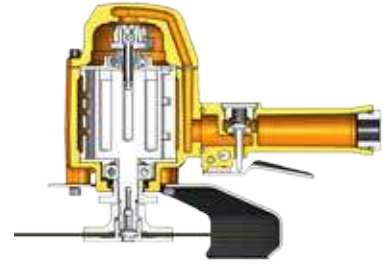

▲ Additional Flanges for Type 41 Flat Wheel (Optional)

#5H-421V28 (Flange)
#5H-421V29 (Flange Nut)

SM-5F-321C

6" Vertical Grinder
- 3.0 HP



SM-5G-321V

7" Vertical Grinder
- 3.0 HP



SM-5H-321V

9" Vertical Grinder
- 3.0 HP



SM-5F-421C

6" Vertical Grinder
- 4.0 HP



SM-5G-421V

7" Vertical Grinder
- 4.0 HP



SM-5H-421V

9" Vertical Grinder
- 4.0 HP



Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Grinding Wheel Size Inch (mm)	Guard Type	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Air Consumption CFM (L/Min) @ Loading	Length Inch (mm)	Height Inch (mm)	Weight Lbs (Kg)
SM-5F-321C	6,000	2,238 (3)	6 (150) Cup	Type 11	5/8"-11	1/2"	1/2 (13)	21.6 (611)	52.7 (1,490)	12.5 (317)	8 (202)	10.4 (4.7)
SM-5G-321V	6,000	2,238 (3)	7 (180) Type 27	Type 27	5/8"-11	1/2"	1/2 (13)	21.6 (611)	52.7 (1,490)	11.5 (291)	7.8 (198)	9.7 (4.4)
SM-5H-321V	6,000	2,238 (3)	9 (225) Type 27	Type 27	5/8"-11	1/2"	1/2 (13)	21.6 (611)	52.7 (1,490)	12.9 (327)	7.8 (199)	10.4 (4.7)
SM-5F-421C	6,000	2,984 (4)	6 (150) Cup	Type 11	5/8"-11	1/2"	1/2 (13)	33.9 (960)	72.5 (2,051)	12.5 (318)	8.7 (222)	12.3 (5.6)
SM-5G-421V	6,000	2,984 (4)	7 (180) Type 27	Type 27	5/8"-11	1/2"	1/2 (13)	33.9 (960)	72.5 (2,051)	11.6 (295)	8.6 (218)	11.7 (5.3)
SM-5H-421V	6,000	2,984 (4)	9 (225) Type 27	Type 27	5/8"-11	1/2"	1/2 (13)	33.9 (960)	72.5 (2,051)	13.1 (332)	8.6 (219)	12.3 (5.6)
* SM-5H-422V	4,200	2,280 (3.1)	9 (225) Type 27	Type 27	5/8"-11	1/2"	1/2 (13)	20.8 (590)	63.2 (1,789)	11.8 (300)	7.6 (194)	10.1 (4.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

* for special purpose

Angle Grinder

SM-5D-6191PS

5" Angle Grinder

Features:

- **with Speed Governor**
- **Composite** Motor Housing
- **Rear Exhaust (Silencer)**
- **Safety Throttle Lever**
- **Spindle Lock** Allows Quick and Easy Disc Change
- **9 Position Adjustable Swivel Guard**
- **1.4 HP Motor**



Hose Clamp Overhose



50-500232-12S
Overhose Assembly (Optional)

Specifications:

Model No.	Free Speed (RPM)	Power HP (Kw)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Air Consumption CFM (L/Min) @ Load	Length Inch (mm)	Weight Lbs (Kg)
SM-5B-6191PS/38	12,000	1.4 (1.04)	4 (100)	3/8"-24	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.2 (1.9)
SM-5B-6191PS/M10	12,000	1.4 (1.04)	4 (100)	M10x1.5	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.2 (1.9)
SM-5C-6191PS/58	12,000	1.4 (1.04)	4-1/2 (115)	5/8"-11	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)
SM-5C-6191PS/M14	12,000	1.4 (1.04)	4-1/2 (115)	M14x2.0	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)
SM-5C-6191PS/38	12,000	1.4 (1.04)	4-1/2 (115)	3/8"-24	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)
SM-5D-6191PS/58	12,000	1.4 (1.04)	5 (125)	5/8"-11	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)
SM-5D-6191PS/M14	12,000	1.4 (1.04)	5 (125)	M14x2.0	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)
SM-5D-6191PS/38	12,000	1.4 (1.04)	5 (125)	3/8"-24	3/8"	1/2 (13)	27.2 (770)	36.9 (1,044)	10 (253)	4.4 (2.0)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders

Features:

- With Speed Governor
- Spindle Lock Design
- Lightweight, Compact Size
- 1.2 HP / 1.8 HP Motor
- Lower Angle Head
- Life Time 1,000 Hours

SM-5B-6400L

4" Angle Grinder

- Lever Type
- 1.2 HP



SM-5D-6400L

SM-5D-6401L

(Spindle: M14x2.0)

5" Angle Grinder

- Lever Type
- 1.2 HP



SM-5G-6700L

SM-5G-6701L

(Spindle: M14x2.0)

7" Angle Grinder

- Lever Type
- 1.8 HP



SM-5B-6400R

4" Angle Grinder

- Roll Type
- 1.2 HP



SM-5D-6400R

SM-5D-6401R

(Spindle: M14x2.0)

5" Angle Grinder

- Roll Type
- 1.2 HP



SM-5G-6700R

SM-5G-6701R

(Spindle: M14x2.0)

7" Angle Grinder

- Roll Type
- 1.8 HP



Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Wheel Hole Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Air Consumption CFM (L/Min) @Load	Length Inch (mm)	Weight Lbs (Kg)	Remark
SM-5B-6400L/15	13,000	895 (1.2)	4 (100)	15 mm	-	3/8"	1/2 (13)	27 (764)	33 (934)	8.8 (223)	2.98 (1.35)	for Japan
SM-5B-6400L/16	13,000	895 (1.2)	4 (100)	5/8 (16)	-	3/8"	1/2 (13)	27 (764)	33 (934)	8.8 (223)	2.98 (1.35)	-
SM-5B-6400R/15	13,000	895 (1.2)	4 (100)	15 mm	-	1/4"	3/8 (10)	27 (764)	33 (934)	8.3 (210)	3.2 (1.45)	for Japan
SM-5B-6400R/16	13,000	895 (1.2)	4 (100)	5/8 (16)	-	1/4"	3/8 (10)	27 (764)	33 (934)	8.3 (210)	3.2 (1.45)	-
SM-5D-6400L	12,000	895 (1.2)	5 (125)	7/8 (22)	-	3/8"	1/2 (13)	27 (764)	33 (934)	8.8 (223)	3.17 (1.44)	-
SM-5D-6401L	12,000	895 (1.2)	5 (125)	7/8 (22)	M14x2.0	3/8"	1/2 (13)	27 (764)	33 (934)	8.8 (223)	3.17 (1.44)	-
SM-5D-6400R	12,000	895 (1.2)	5 (125)	7/8 (22)	-	1/4"	3/8 (10)	27 (764)	33 (934)	8.3 (210)	3.4 (1.54)	-
SM-5D-6401R	12,000	895 (1.2)	5 (125)	7/8 (22)	M14x2.0	1/4"	3/8 (10)	27 (764)	33 (934)	8.3 (210)	3.4 (1.54)	-
SM-5G-6700L	7,600	1,342 (1.8)	7 (180)	7/8 (22)	-	3/8"	1/2 (13)	32 (906)	44 (1,245)	11 (280)	5.95 (2.7)	-
SM-5G-6701L	7,600	1,342 (1.8)	7 (180)	7/8 (22)	M14x2.0	3/8"	1/2 (13)	32 (906)	44 (1,245)	11 (280)	5.95 (2.7)	-
SM-5G-6700R	7,600	1,342 (1.8)	7 (180)	7/8 (22)	-	3/8"	1/2 (13)	32 (906)	44 (1,245)	9.4 (240)	5.51 (2.5)	-
SM-5G-6701R	7,600	1,342 (1.8)	7 (180)	7/8 (22)	M14x2.0	3/8"	1/2 (13)	32 (906)	44 (1,245)	9.4 (240)	5.51 (2.5)	-

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders

Features:

- **With Speed Governor**
- **9 Position Adjustable Swivel Guard**
(for SM-5B-6414S, SM-5C-6414S, SM-5D-6414S)
- **Rear Exhaust**
- **1.1 HP Motor**
- **Lightweight 3.5 Lbs (1.6 Kgs)**



SM-5B-6414
4" Angle Grinder

SM-5C-6414
4-1/2" Angle Grinder


SM-5D-6414
5" Angle Grinder

► Swivel Guard Adjustable in 9 Positions

SM-5B-6414S
4" Angle Grinder

SM-5C-6414S
4-1/2" Angle Grinder

SM-5D-6414S
5" Angle Grinder

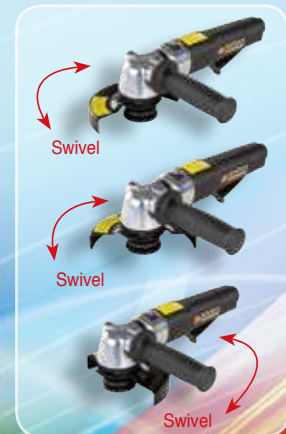

Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) @ Load	Length Inch (mm)	Weight Lbs (Kg)
SM-5B-6414/38	12,000	820 (1.1)	4 (100)	3/8"-24	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5B-6414/M10	12,000	820 (1.1)	4 (100)	M10x1.5	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5C-6414/38	12,000	820 (1.1)	4-1/2 (115)	3/8"-24	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5C-6414/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5C-6414/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5D-6414/38	12,000	820 (1.1)	5 (125)	3/8"-24	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5D-6414/M14	12,000	820 (1.1)	5 (125)	M14x2.0	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5D-6414/58	12,000	820 (1.1)	5 (125)	5/8"-11	1/4"	3/8 (10)	20 (558)	9.7 (247)	3.5 (1.6)
SM-5B-6414S/38	12,000	820 (1.1)	4 (100)	3/8"-24	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5B-6414S/M10	12,000	820 (1.1)	4 (100)	M10x1.5	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5C-6414S/38	12,000	820 (1.1)	4-1/2 (115)	3/8"-24	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5C-6414S/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5C-6414S/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5D-6414S/38	12,000	820 (1.1)	5 (125)	3/8"-24	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5D-6414S/M14	12,000	820 (1.1)	5 (125)	M14x2.0	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)
SM-5D-6414S/58	12,000	820 (1.1)	5 (125)	5/8"-11	1/4"	3/8 (10)	20 (558)	10 (253)	3.5 (1.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders -

Heavy Industrial



SM-5B-6422

4" Angle Grinder

- 12,000 RPM
- 1.6 HP

SM-5C-6422

4-1/2" Angle Grinder

- 12,000 RPM
- 1.6 HP

SM-5D-6422

5" Angle Grinder

- 12,000 RPM
- 1.6 HP



SM-5G-6423

7" Angle Grinder

- 8,400 RPM
- 2.2HP

Features:

- With Speed Governor
- Lever Type
- Side Exhaust
- Side Handle

Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Abrasive Capacity	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Air Consumption CFM (L/Min) @Load	Length Inch (mm)	Weight Lbs (Kg)
SM-5B-6422/38	12,000	1,193 (1.6)	4"	3/8"-24	3/8"	3/8 (10)	33 (934)	41 (1,160)	10.9 (278)	4 (1.8)
SM-5C-6422/58	12,000	1,193 (1.6)	4-1/2"	5/8"-11	3/8"	3/8 (10)	33 (934)	41 (1,160)	10.9 (278)	4.2 (1.92)
SM-5D-6422/58	12,000	1,193 (1.6)	5"	5/8"-11	3/8"	3/8 (10)	33 (934)	41 (1,160)	10.9 (278)	4.3 (1.95)
SM-5D-6422/M14	12,000	1,193 (1.6)	5"	M14x2.0	3/8"	3/8 (10)	33 (934)	41 (1,160)	10.9 (278)	4.3 (1.95)
SM-5G-6423/58	8,400	1,641 (2.2)	7"	5/8"-11	3/8"	1/2 (13)	37 (1,047)	56 (1,585)	12.7 (323)	7.2 (3.27)
SM-5G-6423/M14	8,400	1,641 (2.2)	7"	M14x2.0	3/8"	1/2 (13)	37 (1,047)	56 (1,585)	12.7 (323)	7.2 (3.27)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- With Speed Governor
- Side Exhaust
- Side Handle

SM-5D-6412

- 5" Angle Grinder
 - Lever Type
 - 12,000 RPM
 - 1.6 HP



SM-5D-6412R

- 5" Angle Grinder
 - Roll Type
 - 12,000 RPM
 - 1.6 HP



SM-5G-6413

- 7" Angle Grinder
 - Lever Type
 - 8,400 RPM
 - 2.2 HP



SM-5G-6413R

- 7" Angle Grinder
 - Roll Type
 - 8,400 RPM
 - 2.2 HP



Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Air Consumption CFM (L/Min) @ Load	Length Inch (mm)	Weight Lbs (Kg)
SM-5D-6412	12,000	1,193 (1.6)	5 x 1/4 x 7/8 (125 x 6 x 22.2)	3/8"	3/8 (10)	33 (934)	41 (1,160)	11.7 (296)	4.2 (1.94)
SM-5D-6412R	12,000	1,193 (1.6)	5 x 1/4 x 7/8 (125 x 6 x 22.2)	3/8"	3/8 (10)	33 (934)	41 (1,160)	9.1 (232)	4.3 (1.95)
SM-5G-6413	8,400	1,641 (2.2)	7 x 1/4 x 7/8 (180 x 6 x 22.2)	3/8"	1/2 (13)	37 (1,047)	56 (1,585)	12.7 (323)	7.27 (3.3)
SM-5G-6413R	8,400	1,641 (2.2)	7 x 1/4 x 7/8 (180 x 6 x 22.2)	3/8"	1/2 (13)	37 (1,047)	56 (1,585)	10.9 (277)	7.6 (3.45)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-5B-6410

4" Angle Grinder
- Lever Type

SM-5C-6410

4-1/2" Angle Grinder
- Lever Type

SM-5D-6410

5" Angle Grinder
- Lever Type



Features:

- With Speed Governor
- Accept **0.8 mm~6 mm** Disc
- Built-in Comfort Grip
- Rear Exhaust
- **1.1 HP Motor**

SM-5B-6410R

4" Angle Grinder
- Roll Type

SM-5C-6410R

4-1/2" Angle Grinder
- Roll Type

SM-5D-6410R

5" Angle Grinder
- Roll Type



Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5B-6410/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5C-6410/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5C-6410/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5D-6410/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5D-6410/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5D-6410/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.4 (240)	4.4 (2)	90
SM-5B-6410R/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90
SM-5C-6410R/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90
SM-5C-6410R/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90
SM-5D-6410R/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90
SM-5D-6410R/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90
SM-5D-6410R/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.2 (234)	4.4 (2)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders - Heavy Industrial

Features:

- **With Speed Governor**
- 9 Position Adjustable Swivel Guard
- Accept **0.8 mm~6 mm Disc**
- Built-in Comfort Grip
- Side Handle
- Rear Exhaust
- Vibration Reduced Handle (Optional)
- **1.1 HP Motor**

SM-5B-6410S

4" Angle Grinder

SM-5C-6410S

4-1/2" Angle Grinder

SM-5D-6410S

5" Angle Grinder

- **Swivel Guard**
- **1.1 HP**



EH-5D-6410-11SUB
Exhaust Hose Assembly (Optional)

▼ 9 Position Adjustable Swivel Guard



#5D-619256
Standard Side Handle



#5G-619753
Vibration Reduced Handle (Optional)



QN-38
Quick Nut (3/8"-24UNF)



QN-M14
Quick Nut (M14x2.0P)



QN-58
Quick Nut (5/8"-11UNC)

▲ Suitable for 4-1/2" & 5" Type 41 Wheel Only (Optional)

Specifications:

Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5B-6410S/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90
SM-5C-6410S/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90
SM-5C-6410S/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90
SM-5D-6410S/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90
SM-5D-6410S/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90
SM-5D-6410S/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	3/8 (10)	4 (113)	9.8 (249)	4.4 (2)	90

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders

Features:

- **With Speed Governor**
- 9 Position Adjustable Swivel Guard
- Accept **0.8 mm~6 mm Disc**
- Built-in Comfort Grip
- Side Handle
- Spindle Lock Allows Quick and Easy Disc Change
- Rear Exhaust
- Vibration Reduced Handle (Optional)
- **Low Noise 83 dB(A)**
- **0.9 HP Motor**



▲ Vibration Reduced Handle



▲ Swivel Guard Adjustable



SM-5B-6192A

4" Angle Grinder - without Swivel Guard

SM-5C-6192A

4-1/2" Angle Grinder - without Swivel Guard

SM-5D-6192A

5" Angle Grinder - without Swivel Guard

SM-5B-6192AS
4" Angle Grinder

SM-5C-6192AS
4-1/2" Angle Grinder

SM-5D-6192AS
5" Angle Grinder

▼ 9 Position Adjustable Swivel Guard



Patent No.

TW M281747 / M291340 / M336110



#5D-619256

Standard Side Handle



#5G-619753

Vibration Reduced Handle (Optional)



EH-6192SUB

Exhaust Hose Assembly (Optional)



QN-38

Quick Nut (3/8"-24UNF)



QN-M14

Quick Nut (M14x2.0P)



QN-58

Quick Nut (5/8"-11UNC)

▲ Suitable for 4-1/2" & 5" Type 41 Wheel Only (Optional)

Specifications:

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5B-6192AS/38	12,000	4 (100)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5B-6192AS/M10	12,000	4 (100)	M10x1.5	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192AS/58	12,000	4-1/2 (115)	5/8"-11	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192AS/M14	12,000	4-1/2 (115)	M14x2.0	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192AS/38	12,000	4-1/2 (115)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192AS/58	12,000	5 (125)	5/8"-11	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192AS/M14	12,000	5 (125)	M14x2.0	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192AS/38	12,000	5 (125)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders

Features:

- **With Speed Governor**
- 9 Position Adjustable **Swivel Guard**
- Accept **0.8 mm~6 mm Disc**
- **Composite** Motor Housing
- Side Handle
- **Spindle Lock** Allows Quick and Easy Disc Change
- Rear Exhaust
- Vibration Reduced Handle (Optional)
- **Low Noise 83 dB(A)**
- **0.9 HP Motor**



▲ Spindle Lock



▲ Swivel Guard Adjustable

SM-5B-6192PS

4" Angle Grinder

SM-5C-6192PS

4-1/2" Angle Grinder

SM-5D-6192PS

5" Angle Grinder



▼ 9 Position Adjustable Swivel Guard



#5D-619256

Standard Side Handle



#5G-619753

Vibration Reduced Handle (Optional)



EH-6192SUB

Exhaust Hose Assembly (Optional)



QN-38

Quick Nut (3/8"-24UNF)



QN-M14

Quick Nut (M14x2.0P)



QN-58

Quick Nut (5/8"-11UNC)

▲ Suitable for 4-1/2" & 5" Type 41 Wheel Only (Optional)

Specifications:

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5B-6192PS/38	12,000	4 (100)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5B-6192PS/M10	12,000	4 (100)	M10x1.5	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192PS/58	12,000	4-1/2 (115)	5/8"-11	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192PS/M14	12,000	4-1/2 (115)	M14x2.0	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5C-6192PS/38	12,000	4-1/2 (115)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192PS/58	12,000	5 (125)	5/8"-11	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192PS/M14	12,000	5 (125)	M14x2.0	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83
SM-5D-6192PS/38	12,000	5 (125)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.4 (239)	4.4 (2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

7" Angle Grinders

Features:

- **Spindle Lock Design**
- Spindle Lock Allows Quick And Easy Disc Change
- Push Button Lock off Lever
- Spindle Thread: **5/8"-11 or M14x2.0**
- Rubber Comfort Grip
- Front Exhaust
- Vibration Reduced Handle (Optional)



▲ Spindle Lock



▲ Front Exhaust



▲ Safety Lever

SM-5G-6197

7" Angle Grinder (8,500 RPM)
- 1.3 HP



- Bigger Guard (USA)

SM-5G-6198

7" Angle Grinder (8,500 RPM)
- 1.3 HP



- Smaller Guard (Europe)

Accessories (Optional) :



#5D-619256
Standard Side Handle



#5G-619753
Vibration Reduced Handle (Optional)

Specifications:

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-5G-6197/58	8,500	7 (175)	5/8"-11	3/8"	3/8 (10)	6 (170)	13.8 (350)	7.7 (3.5)
SM-5G-6197/M14	8,500	7 (175)	M14x2.0	3/8"	3/8 (10)	6 (170)	13.8 (350)	7.7 (3.5)
SM-5G-6198/58	8,500	7 (175)	5/8"-11	3/8"	3/8 (10)	4 (113)	13.1 (334)	7.3 (3.3)
SM-5G-6198/M14	8,500	7 (175)	M14x2.0	3/8"	3/8 (10)	4 (113)	13.1 (334)	7.3 (3.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Angle Grinders & Sander

SM-6190

4-1/2" Angle Grinder & Sander



#619041-11

4-1/2" Plastic Pad (Optional)



SM-619 / SM-619A

4" Angle Grinder

SM-6194 / SM-6194B

4-1/2" Angle Grinder

SM-6195 / SM-6195A / SM-6195B

5" Angle Grinder



Specifications:

Model No.	Free Speed (RPM)	Disc Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-6190	12,000	4-1/2 (115)	M10 x 1.5	1/4"	3/8 (10)	6 (170)	8.8 (223)	4 (1.8)
SM-619	12,000	4 (102)	3/8"-24	1/4"	3/8 (10)	6 (170)	8.8 (224)	4 (1.8)
SM-619A	12,000	4 (102)	M10 x 1.5	1/4"	3/8 (10)	6 (170)	8.8 (224)	4 (1.8)
SM-6194	12,000	4-1/2 (115)	3/8"-24	1/4"	3/8 (10)	6 (170)	8.8 (224)	4 (1.8)
SM-6194B	12,000	4-1/2 (115)	5/8"-11	1/4"	3/8 (10)	6 (170)	8.8 (224)	4 (1.8)
SM-6195	12,000	5 (127)	3/8"-24	1/4"	3/8 (10)	6 (170)	8.8 (224)	4.2 (1.9)
SM-6195A	12,000	5 (127)	M14 x 2.0	1/4"	3/8 (10)	6 (170)	8.8 (224)	4.2 (1.9)
SM-6195B	12,000	5 (127)	5/8"-11	1/4"	3/8 (10)	6 (170)	8.8 (224)	4.2 (1.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

7" Angle Sanders & Polishers

Features:

- New Built-in Comfort Grip
- Safety Lever
- Spindle Lock Button
- Rear Exhaust
- Vibration Reduced
- Side Handle (Optional)

SM-67-6661

7" Angle Sander (4,500 RPM)



▲ Spindle Lock Button



SM-6N-6661

7" Angle Polisher (2,500 RPM)
(Wool polisher not included)



Accessories (Optional) :



#5G-619753

Vibration Reduced Side Handle



#6N-666132

7" Plastic Pad (included with tool)



#6N-666131

Wool Polishing Pad



#610227V-62

(5/8"-11 thread)

#610227V-63
(M14x2.0 thread)



#6N-666125V-72

(5/8"-11 thread)


#6N-666125V-73
(M14x2.0 thread)



#6N-666125V-82

(5/8"-11 thread)

#6N-666125V-83
(M14x2.0 thread)



#6N-666131V-6
(6" Pad)

#6N-666131V-7
(7" Pad)

#6N-666131V-8
(8" Pad)

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-67-6661/58	4,500	7(175)	5/8" - 11	1/4"	3/8(10)	3.2 (91)	12 (307)	4.2 (1.9)
SM-67-6661/M14	4,500	7(175)	M14 x 2.0	1/4"	3/8(10)	3.2 (91)	12 (307)	4.2 (1.9)
SM-6N-6661/58	2,500	7(175)	5/8" - 11	1/4"	3/8(10)	3.2 (91)	12 (307)	4.2 (1.9)
SM-6N-6661/M14	2,500	7(175)	M14 x 2.0	1/4"	3/8(10)	3.2 (91)	12 (307)	4.2 (1.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Water Feed Tool Series

SM-5M-130W

Air Wet Stone Cutter (13,000 RPM)



Accessories (Optional) :



#5M-130W35-11

Getter Blade (110 x 20 mm)

Specifications:

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5M-130W	13,000	4-1/2 (110)	1/4	3/8 (10)	5 (142)	9.2 (234)	4.9 (2.2)	80

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-5D-6192AW

5" Air Wet Angle Sander (10,000 RPM)
(Pad not included)



▲ Water Feed



SM-5G-6197W

7" Air Wet Angle Sander (6,000 RPM)
(Pad not included)



▲ Water Feed Type Regulator



▲ Water Feed Type Regulator

Available Pad Size : 3", 4" or 5"

SM-618W

5" Air Wet Stone Sander / Polisher (1,800 RPM)

SM-642W

5" Air Wet Stone Sander / Polisher (4,200 RPM)

SM-680W

5" Air Wet Stone Sander / Polisher (8,000 RPM)

SM-611W

5" Air Wet Stone Sander / Polisher (11,000 RPM)

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-5D-6192AW	10,000	5 (125)	M14x2.0	1/4	3/8 (10)	4 (113)	10.6 (270)	4.6 (2.1)
SM-5G-6197W	6,000	7 (180)	5/8"-11	1/4	3/8 (10)	4 (113)	15.4 (390)	8.6 (3.9)
SM-618W/58	1,800	5 (125)	5/8"-11	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-618W/M14	1,800	5 (125)	M14x2.0	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-642W/58	4,200	5 (125)	5/8"-11	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-642W/M14	4,200	5 (125)	M14x2.0	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-680W/58	8,000	5 (125)	5/8"-11	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-680W/M14	8,000	5 (125)	M14x2.0	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-611W/58	11,000	5 (125)	5/8"-11	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)
SM-611W/M14	11,000	5 (125)	M14x2.0	1/4	3/8 (10)	4 (113)	13.8 (350)	4.9 (2.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)


Angle Sander, Angle Grinder, Angle Die Grinder, Cut-Off Tools

Features:

- **Spindle Lock Design**
- 126° - 8 Position Adjustable Swivel Guard
- Good for Grinding or Cutting
- Rubber molded Cushion Grip
- Rear Exhaust
- Vibration Reduced Handle (Optional)

Patent No.

TW M320458 / M336110 / M281747

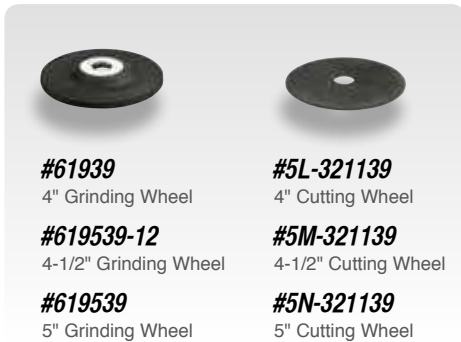

SM-65-3271

5" Angle Sander



SM-5B-3271

4" Angle Grinder & Cut-Off Tool

1.0 HP

SM-5C-3271

4-1/2" Angle Grinder & Cut-Off Tool



SM-5D-3271

5" Angle Grinder & Cut-Off Tool



▲ 126° - 8 Position Adjustable Swivel Guard

SM-5D-3272

5" Angle Grinder & Cut-Off Tool

- Spindle Thread : 5/8"-11
- Non-Swivel Guard

1.0 HP



Features:

- Rubber Molded Cushion Grip
- Rear Exhaust
- **0.7 HP Motor**

SM-52-3271

1/4" Angle Die Grinder



Specifications:

Model No.	Free Speed (RPM)	Disc (or Pad, Collet) Size Inch (mm)	Disc Hole Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)	Noise Level dB(A)
SM-65-3271	9,000	5 (125)	-	5/8"-11	1/4"	3/8 (10)	4 (113)	10.5 (266)	3.5 (1.6)	0.7 (0.52)	84
SM-5B-3271	12,000	4 (100)	5/8" (16)	3/8"-24	1/4"	3/8 (10)	4 (113)	10.6 (268)	3.7 (1.7)	1.0 (0.7)	84
SM-5C-3271	12,000	4-1/2 (115)	5/8" (16)	3/8"-24	1/4"	3/8 (10)	4 (113)	10.6 (268)	3.7 (1.7)	1.0 (0.7)	84
SM-5D-3271	12,000	5 (125)	5/8" (16)	3/8"-24	1/4"	3/8 (10)	4 (113)	10.6 (268)	3.7 (1.7)	1.0 (0.7)	84
SM-5D-3272	12,000	5 (125)	5/8" (16)	5/8"-11	1/4"	3/8 (10)	4 (113)	10.6 (268)	3.7 (1.7)	1.0 (0.7)	84
SM-52-3271	11,000	1/4 (6)	-	-	1/4"	3/8 (10)	4 (113)	10.5 (266)	3.1 (1.4)	0.7 (0.52)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Mini Angle Grinder & Kit

Features:

- **Comfort Grip**
- Side Exhaust
- Safety Throttle Lever
- **Low Noise 81 dB(A)**



▲ Grinding Operation



▲ Operation of Mini Angle Grinder

SM-6542

2" Mini Angle Grinder



SM-6542K

2" Mini Angle Grinder Kit



Kit Includes:




SM-6542

2" Mini Angle Grinder x 1
Installed with
#60 Grit Grinding Wheel



PK-SG2618

Safety Glasses x 1



#5A-7283A40

Pin Wrench x 1



#654248-11

Spanner Wrench x 1



SA-7283560

#60 Grit 2" Grinding Wheel x 3

SA-7283580

#80 Grit 2" Grinding Wheel x 3

SA-72835120

#120 Grit 2" Grinding Wheel x 3

Specifications:

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6542	20,000	2 (50)	3/8"-24	1/4"	3/8 (10)	4 (113)	5 (129)	1.1 (0.5)	81

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Mini Angle Grinder / Cut-Off Tool

Features:

- **Special Spindle**
(Accept 2" Grinding Wheel & 2" Cutting Wheel)
- Comfort Grip
- Side Exhaust
- Safety Throttle Lever
- **Low Noise 81 dB(A)**



▲ Operation of Cutting Metal Plate



▲ Operation of Cutting Metal Plate



2" Angle Grinder



2" Cut-Off Tool

SM-5J-5423

2" Mini Grinder & Cut-Off Tool



SM-5J-5423K

2" Mini Grinder & Cut-Off Tool Kit



SA-7283560

#60 Grit 2" Grinding Wheel x 3

SA-7283580

#80 Grit 2" Grinding Wheel x 3

SA-72835120

#120 Grit 2" Grinding Wheel x 3

Kit Includes:




SM-5J-5423

2" Angle Grinder & Cut-off Tool x 1
Installed with #60 Grit Grinding Wheel



PK-SG2618

Safety Glasses x 1



#5A-7283A40

Pin Wrench x 1



#654248-11

Spanner Wrench x 1



#5J-542007

2" Cutting Wheel x 5

Specifications:

Model No.	Free Speed (RPM)	Grinding & Cutting Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5J-5423	20,000	2 (50)	3/8"-24	1/4"	3/8 (10)	4 (113)	5 (129)	1.1 (0.5)	81

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Rubber Comfort Grip
- Side Exhaust
- Safety Throttle Lever
- **Low Noise 81 dB(A)**



▲ Operation of SM-5J-5420



▲ Operation of SM-5J-5420

SM-5J-5420 2" Mini Cut-Off Tool



Features:

- Compact 180 Degree Disc Guard
- Handle Exhaust
- Safety Throttle Lever
- Rubber Comfort Grip
- **0.6 HP Motor**



▲ Operation of SM-5K-6200



▲ Operation of SM-5K-6200

SM-5K-6200 3" Cut-Off Tool



Specifications:

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)	Noise Level dB(A)
SM-5J-5420	20,000	2 (50)	1/4	3/8 (10)	4 (113)	5 (129)	1.1 (0.5)	-	81
SM-5K-6200	18,000	3 (75)	1/4	3/8 (10)	4 (113)	9 (227)	2.0 (0.93)	0.6 (0.45)	-

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:


- Push Button Adjustable Guard
- **126° - 8 Position Adjustable Swivel Guard**
- Rubber molded Cushion Grip
- Rear Exhaust
- **0.7 HP Motor**



► Operation of Cut-Off Tool




► Operation of Corner Grinder



8 Positions for Guard Adjustment (126° Adjustable)



Push to Adjust Guard



Flat Air Regulator on Top

Patent No.

US D566, 502 S
 DE 20 2006 016 578 U1
 TW M302447 / M308838 / M330148
 M281747 / D121416 / D121417



SM-5L-2011L
4" Extended Cut-Off Tool



SM-5K-3011B
3" Cut-Off Tool - Long Neck

SM-5L-3011B
4" Cut-Off Tool - Long Neck



SM-5K-3011S
3" Cut-Off Tool

SM-5L-3011S
4" Cut-Off Tool

Specifications:

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Disc Hole Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)
SM-5L-2011L	17,000	4 (100)	3/8 (10)	1/4"	3/8 (10)	4 (113)	14.6 (370)	3.7 (1.7)	0.7 (0.52)
SM-5K-3011B	17,000	3 (75)	3/8 (10)	1/4"	3/8 (10)	4 (113)	11 (279)	3.1 (1.4)	0.7 (0.52)
SM-5L-3011B	17,000	4 (100)	3/8 (10)	1/4"	3/8 (10)	4 (113)	11 (279)	3.1 (1.4)	0.7 (0.52)
SM-5K-3011S	17,000	3 (75)	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.6 (243)	2.6 (1.2)	0.7 (0.52)
SM-5L-3011S	17,000	4 (100)	3/8 (10)	1/4"	3/8 (10)	4 (113)	9.6 (243)	2.6 (1.2)	0.7 (0.52)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Cut-Off Tool

Features:

- **Spindle Lock Design**
- **Rear Exhaust**
- **Built-in Cushion Grip**
- **Push to Adjust Guard**
- **11 Positions Adjustable Swivel Guard**
(126° Adjustable)
- **1.0 HP**

SM-5L-5200

4" Extended Cut-Off Tool



11 Positions for Guard Adjustment
(126° Adjustable)



Push to Adjust Guard



Patent No.

US 8,939,816 B2
DE 20 2012 102 406 U1
TW M435541 / M436553 / M460746 / M460757

Specifications:

Model No.	Max. Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Disc Hole Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Kw)	Remark
SM-5L-5200/38	14,000	4 (100)	3/8 (9.5)	1/4"	3/8 (10)	4 (113)	14.6 (371)	3.7 (1.7)	1.0 (0.7)	-
* SM-5L-5200/10	14,000	4 (100)	10 mm	1/4"	3/8 (10)	4 (113)	14.6 (371)	3.7 (1.7)	1.0 (0.7)	-
SM-5L-5200/15	14,000	4 (100)	15 mm	1/4"	3/8 (10)	4 (113)	14.6 (371)	3.7 (1.7)	1.0 (0.7)	for Japan
SM-5L-5200/16	14,000	4 (100)	5/8 (16)	1/4"	3/8 (10)	4 (113)	14.6 (371)	3.7 (1.7)	1.0 (0.7)	-

* Recommended Air Pressure at 90 PSI (6.2 Bar)

3" Reversible Cut-Off Tools

Features:

- Special Hub Allows for Left or Right Turning Cutting Wheel
- Collar Operated Easy Directional Change
- Safety Throttle Lever
- Rear Exhaust
- **0.85 HP Motor**



▲ Direction of Reverse



▲ Direction of Forward



Special Hub Allows for Left or Right Turning Cutting Wheel



SM-5J-8423
3" Reversible Cut-Off tool



SM-5J-8424
3" Reversible Cut-Off tool

Patent No.

TW 223988 / M380214
US 6813837

Specifications:

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-5J-8423	20,000	3 (75)	1/4"	3/8 (10)	4 (113)	8 (204)	2 (0.9)	85
SM-5J-8424	20,000	3 (75)	1/4"	3/8 (10)	4 (113)	8 (204)	2 (0.9)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

3" Reversible Cut-Off Tools & Kit

Features:

- **Reversing Lever**
(Reverses to direct sparks & debris away from the operator)
- **Patented Hub** (Design for reversing function)
- **Compact Disc Guard**
- Built-in Cushion Grip
- Safety Throttle Lever
- Rotating Air Inlet




▲ Direction of Forward



▲ Direction of Reverse



Reversing Lever



Hub for Reversible

SM-5265R 3" Reversible Cut-Off Tool



SM-5263R 3" Reversible Cut-Off Tool



SM-5265RK Reversible Cut-Off Tool Kit

Kit Includes:



#51228
Double Ended
Spanner Wrench x 2



#10014
Hex Key Wrench x 1
(4.0 x 70L)



SM-5265R
3" Reversible Cut-Off Tool x 1



#52630
3" Cutting Wheel x 10



PK-SG2618
Safety Glasses x 1

Patent No.

US 6813837 / TW 223988

Specifications:

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-5263R	18,000	3 (75)	1/4"	3/8 (10)	4 (113)	7.2 (183)	2 (0.9)
SM-5265R	18,000	3 (75)	1/4"	3/8 (10)	4 (113)	7.2 (183)	2 (0.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)



1-1/4" Mini Random Orbital Nib Sander

Features:

- Composite Motor Housing
- Orbit Diameter: **3/16"** (5 mm)
- Well-Balanced
- Low Vibration
- Roloc Sanding Pad
- PSA Style Pad
- **Lightweight 0.5 kg**

SM-61-6133

1-1/4" Mini Random Orbital Nib Sander
- Orbit Dia. 3/16" (5 mm)



Roloc Type Pad

Specifications:

Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-61-6133	8,000	3/16 (5)	1-1/4 (32)	Locking Type	1/4"	3/8 (10)	2 (57)	5.2 (131)	1.1 (0.5)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Random Orbital Palm Sander

Features:

- Composite Motor Housing
- Powerful Dust Extraction
- One-hand Speed Control
- Well-balanced and Low Vibration
- Lightweight
- Low Noise



Central-Vacuum

SM-63-6143C

3" Random Orbital Palm Sander
- Orbit Dia. **5 mm**

SM-63-6243C

3" Random Orbital Palm Sander
- Orbit Dia. **2.5 mm**

Self-Vacuum

SM-63-6143A

3" Random Orbital Palm Sander
- Orbit Dia. **5 mm**

SM-63-6243A

3" Random Orbital Palm Sander
- Orbit Dia. **2.5 mm**



Specifications:

Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Length Inch (mm)	Weight Lbs (Kg)	Power Watt (HP)	Noise Level dB(A)
SM-63-6143C	12,000	3/16 (5)	3 (77)	1/4"-20	1/4"	1/4 (6)	17 (480)	8.1 (205)	1.1 (0.5)	209 (0.28)	76
SM-63-6243C	12,000	3/32 (2.5)	3 (77)	1/4"-20	1/4"	1/4 (6)	17 (480)	8.1 (205)	1.1 (0.5)	209 (0.28)	76
SM-63-6143A	12,000	3/16 (5)	3 (77)	1/4"-20	1/4"	1/4 (6)	17 (480)	8.1 (205)	1.1 (0.5)	209 (0.28)	84
SM-63-6243A	12,000	3/32 (2.5)	3 (77)	1/4"-20	1/4"	1/4 (6)	17 (480)	8.1 (205)	1.1 (0.5)	209 (0.28)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Nib Removal Sanders

Features:

- Small Diameter Head Size for Better Visibility, Less Buffing
- Lightweight, Easy-Grip, Right Angle Tool
- Better Visibility, Less Buffing
- Precise Speed Control
- Rear Exhaust with Available Overhose
- **Roloc Type Pad**



SM-61-5235

Nib Removal Sander

- Orbit Dia. 3 mm

SM-61-5236

Nib Removal Sander

- Orbit Dia. 3 mm

Specifications:

Model No.	Max. Free Speed (RPM)	Pad Size Inch (mm)	Orbit Diameter Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-61-5235	12,000	1-1/4 (32)	1/8 (3)	1/4"	3/8 (10)	1 (28.3)	7.8 (199)	1.3 (0.6)	80
SM-61-5236	12,000	1-1/4 (32)	1/8 (3)	1/4"	3/8 (10)	1 (28.3)	7.8 (199)	1.3 (0.6)	80

* Recommended Air Pressure at 90 PSI (6.2 Bar)

3" Buffers

Features:

- Lightweight **1.0 Kg**
- Low Noise **82 dB(A)**



G5-513257
Hook (Optional)

SM-63-5432

3" Buffer - **Oil-Free**
- Orbit Dia. 14 mm



SM-63-6432

3" Buffer
- Orbit Dia. 14 mm



SM-63-5137

3" Buffer - **Oil-Free**
- Orbit Dia. 5 mm

SM-63-5237

3" Buffer - **Oil-Free**
- Orbit Dia. 2.5 mm

SM-63-5437

3" Buffer - **Oil-Free**
- Orbit Dia. 14 mm



SM-63-6133

3" Buffer
- Orbit Dia. 5 mm

SM-63-6233

3" Buffer
- Orbit Dia. 2.5 mm

SM-63-6433

3" Buffer
- Orbit Dia. 14 mm



Specifications:

Model No.	Max. Free Speed (RPM)	Pad Size Inch (mm)	Orbit Diameter Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-63-5432	12,000	3 (75)	9/16 (14)	5/16"-24	1/4"	3/8 (10)	3 (85)	9.9 (252)	2.2 (1.0)	82
SM-63-6432	12,000	3 (75)	9/16 (14)	5/16"-24	1/4"	3/8 (10)	3 (85)	9.9 (252)	2.2 (1.0)	82
SM-63-5137	12,000	3 (75)	3/16 (5)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76
SM-63-5237	12,000	3 (75)	3/32 (2.5)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76
SM-63-5437	12,000	3 (75)	9/16 (14)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76
SM-63-6133	12,000	3 (75)	3/16 (5)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76
SM-63-6233	12,000	3 (75)	3/32 (2.5)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76
SM-63-6433	12,000	3 (75)	9/16 (14)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.2 (132)	1.4 (0.6)	76

* Recommended Air Pressure at 90 PSI (6.2 Bar)

3", 4" & 5" Gear-Driven Sanders / Polishers

Features:

- One or Two-Hand Operation
- Orbit Diameter: **5 mm**
- Lightweight **1.0 kg**
- Low Noise **84 dB(A)**

Accessories (Optional) :



G5-513257
Hook



#6N-663636-11
#80 Grit
5" White Compounding Pad - Velcro



#6N-663637-11
#70 Grit
5" Yellow Compounding Pad - Velcro



G4-513243-11
#80 Grit
4" White Compounding Pad - Velcro



G4-513244-11
#70 Grit
4" Yellow Compounding Pad - Velcro



SA-75543VC
3" Yellow Compounding Pad - Velcro



SA-75653VC
3" White Compounding Pad - Velcro

SM-G3-6132

3" Gear-Driven Sander/Polisher



Geared

SM-G3-5132

3" Gear-Driven Sander / Polisher - **Oil-free**



Geared

SM-G4-6132

4" Gear-Driven Sander/Polisher



Geared

SM-G4-5132

4" Gear-Driven Sander / Polisher - **Oil-free**



Geared

SM-G5-6132

5" Gear-Driven Sander/Polisher



Geared

SM-G5-5132

5" Gear-Driven Sander / Polisher - **Oil-free**



Geared

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Orbit Diameter Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-G3-6132	1,300	3 (75)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84
SM-G3-5132	1,300	3 (75)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84
SM-G4-6132	1,300	4 (100)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84
SM-G4-5132	1,300	4 (100)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84
SM-G5-6132	1,300	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84
SM-G5-5132	1,300	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

5" & 6" Two-Hand Sanders

Features:

- One or Two-Hand Operation
- Orbit Diameter: **5 mm & 10 mm**
- Swivel Hose Connector
- Lightweight **1.0 kg**
- Low Noise **84 dB(A)**



G5-513257
Hook (Optional)

Patent No.

TAIWAN NO. D116828 / M304400

SM-65-6132

5" Two-Hand Sanders
- Orbit Dia. 5 mm

SM-66-6032

6" Two-Hand Sanders
- Orbit Dia. 10 mm

SM-66-6132

6" Two-Hand Sanders
- Orbit Dia. 5 mm

Non-Vacuum



SM-65-6132A

5" Two-Hand Sanders
- Orbit Dia. 5 mm

SM-66-6032A

6" Two-Hand Sanders
- Orbit Dia. 10 mm

SM-66-6132A

6" Two-Hand Sanders
- Orbit Dia. 5 mm

Dust Free Type



Oil-Free Two-Hand Sanders

Features:

- One or Two-Hand Operation
- Orbit Diameter: **5 mm & 10 mm**
- Swivel Hose Connector
- Lightweight **1.0 kg**
- Low Noise **84 dB(A)**



EH-6133ASUB
Exhaust Hose Assembly
(Optional)
(I.D. : 25.4mm ; O.D. : 33.4mm)



G5-513257
Hook (Optional)

SM-65-5132

5" Two-Hand Sanders
- Orbit Dia. 5 mm

SM-66-5032

6" Two-Hand Sanders
- Orbit Dia. 10 mm

SM-66-5132

6" Two-Hand Sanders
- Orbit Dia. 5 mm

Non-Vacuum



SM-65-5132A

5" Two-Hand Sanders
- Orbit Dia. 5 mm

SM-66-5032A

6" Two-Hand Sanders
- Orbit Dia. 10 mm

SM-66-5132A

6" Two-Hand Sanders
- Orbit Dia. 5 mm

Dust Free Type



Specifications:

Model No.	Max. Free Speed (RPM)	Pad Size Inch (mm)	Orbit Diameter Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-65-6132	12,000	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-66-6032	12,000	6 (150)	3/8 (10)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-66-6132	12,000	6 (150)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-65-6132A	12,000	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84
SM-66-6032A	12,000	6 (150)	3/8 (10)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84
SM-66-6132A	12,000	6 (150)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84
SM-65-5132	12,000	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-66-5032	12,000	6 (150)	3/8 (10)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-66-5132	12,000	6 (150)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	80
SM-65-5132A	12,000	5 (125)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84
SM-66-5032A	12,000	6 (150)	3/8 (10)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84
SM-66-5132A	12,000	6 (150)	3/16 (5)	1/4"	3/8 (10)	3 (85)	10.6 (268)	2.2 (1.0)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Random Orbital Palm Sanders

Features:

- Composite Motor Housing
- Orbit Diameter:
2.5 mm, 5 mm, 8 mm & 10 mm
- Well-balanced
- Low Vibration



▲ Operation of Palm Sander (Non-Vacuum)



EH-6133ASUB

Exhaust Hose Assembly (Optional)
(I.D. : 25.4mm ; O.D.: 33.4mm)



▲ Operation of Palm Sander (Central-Vacuum)



Non-Vacuum

SM-65-6033

5" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-65-6833

5" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-65-6133

5" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-65-6233

5" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

SM-66-6033

6" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-66-6833

6" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-66-6133

6" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-66-6233

6" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

Central-Vacuum

SM-65-6033C

5" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-65-6833C

5" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-65-6133C

5" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-65-6233C

5" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

SM-66-6033C

6" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-66-6833C

6" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-66-6133C

6" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-66-6233C

6" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

Random Orbital Palm Sanders

Self-Vacuum

SM-65-6033A

5" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-65-6833A

5" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-65-6133A

5" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-65-6233A

5" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

SM-66-6033A

6" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-66-6833A

6" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-66-6133A

6" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-66-6233A

6" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm



Specifications:

Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-65-6033	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-6833	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-6133	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-6233	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-6033	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-6833	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-6133	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-6233	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-6033C	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-6833C	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-6133C	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-6233C	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-6033C	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-6833C	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-6133C	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-6233C	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-6033A	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-6833A	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-6133A	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-6233A	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-6033A	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-6833A	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-6133A	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-6233A	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Random Orbital Oil-Free Palm Sanders

Features:

- Composite Motor Housing
- Orbit Diameter:
2.5 mm, 5 mm, 8 mm & 10 mm
- Well-balanced
- Low Vibration
- **Oil-Free**



▲ Operation of Palm Sander (Central-Vacuum)



▲ Operation of Palm Sander (Non-Vacuum)



Non-Vacuum

SM-65-5037

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-66-5037

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-65-5837

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-66-5837

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-65-5137

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-66-5137

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-65-5237

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm

SM-66-5237

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm

Central-Vacuum

SM-65-5037C

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-66-5037C

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-65-5837C

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-66-5837C

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-65-5137C

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-66-5137C

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-65-5237C

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm

SM-66-5237C

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm

Random Orbital Oil-Free Palm Sanders

Self-Vacuum

SM-65-5037A

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-66-5037A

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 10 mm

SM-65-5837A

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-66-5837A

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 8 mm

SM-65-5137A

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-66-5137A

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 5 mm

SM-65-5237A

5" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm

SM-66-5237A

6" Random Orbital **Oil-Free** Palm Sander
- Orbit Dia. 2.5 mm



Specifications:

Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-65-5037	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-5837	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-5137	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-5237	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-5037	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-5837	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-5137	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-66-5237	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	5.7 (146)	1.3 (0.6)	76
SM-65-5037C	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-5837C	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-5137C	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-5237C	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-5037C	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-5837C	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-5137C	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-66-5237C	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	76
SM-65-5037A	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-5837A	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-5137A	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-65-5237A	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-5037A	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-5837A	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-5137A	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84
SM-66-5237A	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	7.4 (187)	1.5 (0.7)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Random Orbital Palm Sanders

Self-Vacuum

SM-65-6033B

5" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-65-6833B

5" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-65-6133B

5" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-65-6233B

5" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

SM-66-6033B

6" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-66-6833B

6" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-66-6133B

6" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-66-6233B

6" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm



SM-65-5037B Oil-Free

5" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-65-5837B Oil-Free

5" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-65-5137B Oil-Free

5" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-65-5237B Oil-Free

5" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm

SM-66-5037B Oil-Free

6" Random Orbital Palm Sander
- Orbit Dia. 10 mm

SM-66-5837B Oil-Free

6" Random Orbital Palm Sander
- Orbit Dia. 8 mm

SM-66-5137B Oil-Free

6" Random Orbital Palm Sander
- Orbit Dia. 5 mm

SM-66-5237B Oil-Free

6" Random Orbital Palm Sander
- Orbit Dia. 2.5 mm



Specifications:

Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-65-6033B	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-6833B	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-6133B	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-6233B	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-6033B	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-6833B	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-6133B	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-6233B	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-5037B	12,000	3/8 (10)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-5837B	12,000	5/16 (8)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-5137B	12,000	3/16 (5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-65-5237B	12,000	3/32 (2.5)	5 (125)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-5037B	12,000	3/8 (10)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-5837B	12,000	5/16 (8)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-5137B	12,000	3/16 (5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84
SM-66-5237B	12,000	3/32 (2.5)	6 (150)	5/16"-24	1/4"	3/8 (10)	2 (57)	6.4 (162)	1.5 (0.7)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

5", 6" & 8" Gear-Driven Sanders / Polishers

Features:

- Low Speed, High Torque
- Central Vacuum System
- Random Orbital Fine Polishing & Sanding

SM-65-6238

5" Gear-Driven Sander/Polisher (900 RPM)
- Orbit Dia. 5 mm

SM-66-6238

6" Gear-Driven Sander/Polisher (900 RPM)
- Orbit Dia. 5 mm



Geared

SM-68-6238

8" Gear-Driven Sander/Polisher (900 RPM)
- Orbit Dia. 5 mm



Geared

SM-66-6238A

6" Gear-Driven Sander/Polisher (900 RPM)
- Orbit Dia. 5 mm



Geared

SM-68-6238A

8" Gear-Driven Sander/Polisher (900 RPM)
- Orbit Dia. 5 mm



Geared



EH-6238ASUB

Exhaust Hose Assembly (Optional)
(I.D. : 25.4 mm ; O.D.: 33.4 mm)

Accessories (Optional) :



#6P-663636-11 #80 Grit
Compounding Pad - Velcro



#6P-663637-11 #70 Grit
Compounding Pad - Velcro



#6N-663131V-6
#6N-663131V-8
Polishing Pad - Velcro



#66-6138A42
6" Sanding Pad



#68-6138A42
8" Sanding Pad



3M
Sanding Paper

▼ For SM-66-6238A Only

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Orbit Diameter Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-65-6238	900	5 (125)	3/16 (5)	1/4"	3/8 (10)	3.5 (99)	11.6 (295)	4.2 (1.9)
SM-66-6238	900	6 (152)	3/16 (5)	1/4"	3/8 (10)	3.5 (99)	11.6 (295)	4.2 (1.9)
SM-68-6238	900	8 (203)	3/16 (5)	1/4"	3/8 (10)	3.5 (99)	12.4 (315)	4.4 (2.0)
SM-66-6238A	900	6 (152)	3/16 (5)	1/4"	3/8 (10)	3.5 (99)	11 (280)	4.2 (1.9)
SM-68-6238A	900	8 (203)	3/16 (5)	1/4"	3/8 (10)	3.5 (99)	12.4 (315)	4.4 (2.0)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

5" & 6" Vertical Sanders / Polishers

Features:

- Composite Motor Housing
- with Air Regulator
- 3,500 RPM
- Lightweight **1.1 Kg**
- **0.6 HP** Motor



SM-6N-6636

5" Vertical Sander/Polisher

SM-6P-6636

6" Vertical Sander/Polisher



SM-65-6636G


5" Vertical Sander/Polisher

SM-66-6636G

6" Vertical Sander/Polisher



Accessories (Optional) :



#6N-663617-11S
Silencer



#6N-663609-11
Silencer (Installed)



#6N-663636-11 #80 Grit
5" White Compounding Pad
- Velcro



#6N-663637-11 #70 Grit
5" Yellow Compounding Pad
- Velcro



#6N-663638-11
5" Wool Polishing Pad
- Velcro

#6P-663636-11 #80 Grit
6" White Compounding Pad
- Velcro

#6P-663637-11 #70 Grit
6" Yellow Compounding Pad
- Velcro

#6N-666131V-6
6" Wool Polishing Pad
- Velcro

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6N-6636	3,500	5 (125)	5/16"-24	1/4"	3/8 (10)	3.9 (110)	144(H)x205(W)x214(L)	2.2 (1.0)	80
SM-6P-6636	3,500	6 (150)	5/16"-24	1/4"	3/8 (10)	3.9 (110)	144(H)x205(W)x214(L)	2.2 (1.0)	80
SM-65-6636G	3,500	5 (125)	5/16"-24	1/4"	3/8 (10)	3.9 (110)	134(H)x235(W)x220(L)	2.6 (1.2)	80
SM-66-6636G	3,500	6 (150)	5/16"-24	1/4"	3/8 (10)	3.9 (110)	134(H)x235(W)x220(L)	2.6 (1.2)	80

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Vertical Polisher

Features:

- Safety Throttle Lever
- Side Handle

SM-6102

Vertical Polisher (3" & 6")



#52227
Spanner



#5D-619256
Standard Side Handle



#600627V-31
3" Sanding Pad



EH-522SUB
Exhaust Hose Assembly
(Optional)



#610227V-61
6" Sanding Pad

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-6102	1,800	3 & 6 (75 & 150)	5/16"-24	1/4"	3/8 (10)	6 (170)	7.4 (187)	2.8 (1.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

7" Vertical Sander / Polisher

Features:

- Built-in Comfort Grip
- **Low Noise 85 dB(A)**

SM-6203

7" Vertical Polisher

SM-6303

7" Vertical Sander / Polisher



Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6203	2,000	7 (175)	5/8"-11	1/4"	3/8 (10)	11 (311)	7.4 (188)	4.8 (2.2)	85
SM-6303	5,000	7 (175)	5/8"-11	1/4"	3/8 (10)	11 (311)	7.4 (188)	4.8 (2.2)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Reversible High Speed Sanders

Features:

- **Composite Motor Housing**
(Double Injection only for SM-60-7253A)
- Reversing Bar on Both Sides
- Handle Exhaust
- **Patented Silencer 83 dB(A)**
- **0.6 HP**

Reversible



SM-60-7253A

5" Reversible High Speed Sander



SM-60-7254A

5" Reversible High Speed Sander

Features:

- **Built-in Comfort Grip**
- 3 Different Size of Pads
- Reversible
- Handle Exhaust
- **0.6 HP**



▲ Operation of Reversible High Speed Sander



SM-60-7251A

5" Reversible High Speed Sander



#66029
5-1/2" Pad



#66028
4-1/2" Pad



#66027
3" Pad

Specifications:

Model No.	Free Speed (RPM)	Pad Size (Inch)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-60-7253A	16,000	3, 4-1/2, 5-1/2	1/4"	3/8 (10)	4 (113)	5.7 (146)	2.2 (1.0)	83
SM-60-7254A	16,000	3, 4-1/2, 5-1/2	1/4"	3/8 (10)	4 (113)	5.7 (146)	2.2 (1.0)	83
SM-60-7251A	16,000	3, 4-1/2, 5-1/2	1/4"	3/8 (10)	4 (113)	5.6 (142)	2.21 (1.0)	-

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Mini Tool Series - Composite

Features:

- Composite Motor Housing
- Handle Exhaust
- **Low Noise 80 dB(A)**



Air Regulator



▲ Operation of Mini Polisher



SM-61-6321-2
2" Mini Disc Sander



SM-61-6321-3
3" Mini Disc Sander



SM-62-6321
1/4" Mini Die Grinder
- Collet Size : 1/4" (6 mm) or 1/8" (3 mm)



SM-63-6321-2
2" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 1/4"-20 or M6x1.0



SM-63-6321-3
3" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 1/4"-20 or M6x1.0



SM-64-6321
3" Mini Polisher
- Spindle : 1/4"-20 or M6x1.0

SM-66-6321
3" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 5/16"-24

SM-68-6321
3" Mini Polisher
- Spindle : 5/16"-24

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-61-6321-2	15,000	2 (50)	1/4"-20	1/4"	3/8 (10)	3.5 (99)	3.9 (100)	1.19 (0.54)
SM-61-6321-3	15,000	3 (75)	1/4"-20	1/4"	3/8 (10)	3.5 (99)	3.9 (100)	1.19 (0.54)
SM-62-6321	20,000	-	-	1/4"	3/8 (10)	3.5 (99)	4.8 (121)	1.21 (0.55)
SM-63-6321-2	15,000	2 (50)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	2.8 (79)	4.2 (107)	1.41 (0.64)
SM-63-6321-3	15,000	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	2.8 (79)	4.2 (107)	1.41 (0.64)
*SM-66-6321	15,000	3 (75)	5/16"-24	1/4"	3/8 (10)	2.8 (79)	4.2 (107)	1.41 (0.64)
SM-64-6321	3,200	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	3.2 (91)	4.6 (116)	1.59 (0.72)
*SM-68-6321	3,200	3 (75)	5/16"-24	1/4"	3/8 (10)	3.2 (91)	4.6 (116)	1.59 (0.72)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-61-6321K

Mini Disc Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

- 1 pc SM-61-6321 2" & 3" Mini Disc Sander
- 1 pc #52227 Spanner Wrench
- 1 pc SA-60012P 2" Sanding Backup Pad
- 10 pcs SA-2060SD #60 Grit Sanding Disc 2" Dia.
- 10 pcs SA-2080SD #80 Grit Sanding Disc 2" Dia.
- 10 pcs SA-2120SD #120 Grit Sanding Disc 2" Dia.
- 3 pcs SA-60012SP 2" Surface Prep Pad (Fine, Medium & Coarse)
- 1 pc SA-60013P 3" Sanding Backup Pad (Installed)
- 10 pcs SA-3060SD #60 Grit Sanding Disc 3" Dia.
- 10 pcs SA-3080SD #80 Grit Sanding Disc 3" Dia.
- 10 pcs SA-3120SD #120 Grit Sanding Disc 3" Dia.
- 3 pcs SA-60013SP 3" Surface Prep Pad (Fine, Medium & Coarse)

SM-61-6321-2K

2" Mini Disc Sander Kit



Kit Includes:

In Blow Molded Case Complete with:

- 1 pc SM-61-6321-2 2" Mini Disc Sander
- 1 pc #52227 Spanner Wrench
- 1 pc SA-60012P 2" Sanding Backup Pad (Installed)
- 10 pcs SA-2060SD #60 Grit Sanding Disc 2" Dia.
- 10 pcs SA-2080SD #80 Grit Sanding Disc 2" Dia.
- 10 pcs SA-2120SD #120 Grit Sanding Disc 2" Dia.
- 3 pcs SA-60012SP 2" Surface Prep Pad (Fine, Medium & Coarse)

Accessories:



SA-60012P
2" Sanding Backup Pad



SA-2060SD #60 Grit

Sanding Disc 2" Dia.

SA-2080SD #80 Grit

Sanding Disc 2" Dia.

SA-2100SD #100 Grit

Sanding Disc 2" Dia.

SA-2120SD #120 Grit

Sanding Disc 2" Dia.



SA-60012SP
2" Surface Prep Pad
(Fine, Medium & Coarse)

SM-61-6321-3K

3" Mini Disc Sander Kit



Kit includes:

In Blow Molded Case Complete with:

- 1 pc SM-61-6321-3 3" Mini Disc Sander
- 1 pc #52227 Spanner Wrench
- 1 pc SA-60013P 3" Sanding Backup Pad (Installed)
- 10 pcs SA-3060SD #60 Grit Sanding Disc 3" Dia.
- 10 pcs SA-3080SD #80 Grit Sanding Disc 3" Dia.
- 10 pcs SA-3120SD #120 Grit Sanding Disc 3" Dia.
- 3 pcs SA-60013SP 3" Surface Prep Pad (Fine, Medium & Coarse)

Accessories:



SA-60013P
3" Sanding Backup Pad



SA-3060SD #60 Grit

Sanding Disc 3" Dia.

SA-3080SD #80 Grit

Sanding Disc 3" Dia.

SA-3100SD #100 Grit

Sanding Disc 3" Dia.

SA-3120SD #120 Grit

Sanding Disc 3" Dia.



SA-60013SP
3" Surface Prep Pad
(Fine, Medium & Coarse)



SM-62-6321K

1/4" Mini Die Grinder Kit

Kit Includes:

In Blow Molded Case Complete with:

- 1 pc SM-62-6321 Mini Die Grinder
- 2 pcs #52227 Spanner Set
- 1 pc #51224-11 1/4" or 6 mm Collet (Installed)
- 1 pc #51224-12 1/8" or 3 mm Collet
- 10 pcs ST-512 Complete Set of Wheel Stones

SM-63-6321K

Mini Orbital Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

- 1 pc SM-63-6321 2" & 3" Mini Orbital Sander
- 1 pc #600324 Key Wrench
- 1 pc SA-6003V-2P 2" Velcro Sanding Pad
- 1 pc SA-6003V-3P 3" Velcro Sanding Pad (Installed)
- 10 pcs SA-2320GP 2" Sanding Paper #320 Grit
- 10 pcs SA-2400GP 2" Sanding Paper #400 Grit
- 10 pcs SA-2600GP 2" Sanding Paper #600 Grit
- 10 pcs SA-3320GP 3" Sanding Paper #320 Grit
- 10 pcs SA-3400GP 3" Sanding Paper #400 Grit
- 10 pcs SA-3600GP 3" Sanding Paper #600 Grit

Accessories:



SA-6003V-2P
2" Velcro Sanding Pad



SA-6003V-3P
3" Velcro Sanding Pad

SM-64-6321K

3" Mini Polisher Kit



Kit Includes:

In Blow Molded Case Complete with:

- 1 pc SM-64-6321 3" Mini Polisher
- 1 pc #51228 Spanner Wrench
- 1 pc SA-6003V-3P 3" Velcro Sanding Pad (Installed)
- 1 pc SA-77213 3-1/2" Bonnet
- 1 pc SA-75543VC 3-1/2" Yellow Compounding Pad
- 1 pc SA-75653VC 3-1/2" White Compounding Pad

Accessories:



SA-77213
3-1/2" Bonnet



SA-75543VC
3-1/2" Yellow Compounding Pad



SA-75653VC
3-1/2" White Compounding Pad

Features:

- Ergonomic Handle Design
- Built-in Comfort Grip
- Handle Exhaust



Air Regulator



SM-6001-2
2" Mini Disc Sander



SM-6001-3
3" Mini Disc Sander



SM-6002
1/4" Mini Die Grinder
- Collet Size : 1/4" (6 mm) or 1/8" (3 mm)



SM-6003V-2
2" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 1/4"-20 or M6x1.0



SM-6003V-3
3" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 1/4"-20 or M6x1.0



SM-6004
3" Mini Polisher
- Spindle : 1/4"-20 or M6x1.0

Rubber Grip Color:



SM-6006
3" Mini Orbital Sander
- Orbit Dia. 4 mm
- Spindle : 5/16"-24

SM-6008
3" Mini Polisher
- Spindle : 5/16"-24

Specifications:

Model No.	Free Speed (RPM)	Pad Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6001-2	15,000	2 (50)	1/4"-20	1/4"	3/8 (10)	3.2 (91)	3.9 (100)	1.3 (0.6)	84
SM-6001-3	15,000	3 (75)	1/4"-20	1/4"	3/8 (10)	3.2 (91)	3.9 (100)	1.3 (0.6)	84
SM-6002	15,000	-	-	1/4"	3/8 (10)	3.2 (91)	4.7 (120)	1.4 (0.65)	84
SM-6003V-2	15,000	2 (50)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	3.2 (91)	4.2 (107)	1.5 (0.7)	84
SM-6003V-3	15,000	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	3.2 (91)	4.2 (107)	1.5 (0.7)	84
* SM-6006	15,000	3 (75)	5/16"-24	1/4"	3/8 (10)	3.2 (91)	4.2 (107)	1.5 (0.7)	84
SM-6004	2,500	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	3.2 (91)	4.5 (115)	1.8 (0.8)	84
* SM-6008	2,500	3 (75)	5/16"-24	1/4"	3/8 (10)	3.2 (91)	4.5 (115)	1.8 (0.8)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-6001K

Mini Disc Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

1 pc	SM-6001	Mini Disc Sander with Rubber Grip
1 pc	#52227	Spanner Wrench
1 pc	SA-60012P	2" Sanding Backup Pad (Installed)
10 pcs	SA-2060SD	#60 Grit Sanding Disc 2" Dia.
10 pcs	SA-2080SD	#80 Grit Sanding Disc 2" Dia.
10 pcs	SA-2120SD	#120 Grit Sanding Disc 2" Dia.
3 pcs	SA-60012SP	2" Surface Prep Pad (Fine, Medium & Coarse)
1 pc	SA-60013P	3" Sanding Backup Pad
10 pcs	SA-3060SD	#60 Grit Sanding Disc 3" Dia.
10 pcs	SA-3080SD	#80 Grit Sanding Disc 3" Dia.
10 pcs	SA-3120SD	#120 Grit Sanding Disc 3" Dia.
3 pcs	SA-60013SP	3" Surface Prep Pad (Fine, Medium & Coarse)

SM-6001-2K

2" Mini Disc Sander Kit



Kit Includes:

In Blow Molded Case Complete with:

1 pc	SM-6001-2	Mini Disc Sander with Rubber Grip
1 pc	#52227	Spanner Wrench
1 pc	SA-60012P	2" Sanding Backup Pad (Installed)
10 pcs	SA-2060SD	#60 Grit Sanding Disc 2" Dia.
10 pcs	SA-2080SD	#80 Grit Sanding Disc 2" Dia.
10 pcs	SA-2120SD	#120 Grit Sanding Disc 2" Dia.
3 pcs	SA-60012SP	2" Surface Prep Pad (Fine, Medium & Coarse)

Accessories:



SA-60012P
2" Sanding Backup Pad



SA-2060SD #60 Grit

Sanding Disc 2" Dia.

SA-2080SD #80 Grit

Sanding Disc 2" Dia.

SA-2100SD #100 Grit

Sanding Disc 2" Dia.

SA-2120SD #120 Grit

Sanding Disc 2" Dia.



SA-60012SP
2" Surface Prep Pad
(Fine, Medium & Coarse)

SM-6001-3K

3" Mini Disc Sander Kit



Kit Includes:

In Blow Molded Case Complete with:

1 pc	SM-6001-3	Mini Disc Sander with Rubber Grip
1 pc	#52227	Spanner Wrench
1 pc	SA-60013P	3" Sanding Backup Pad (Installed)
10 pcs	SA-3060SD	#60 Grit Sanding Disc 3" Dia.
10 pcs	SA-3080SD	#80 Grit Sanding Disc 3" Dia.
10 pcs	SA-3120SD	#120 Grit Sanding Disc 3" Dia.
3 pcs	SA-60013SP	3" Surface Prep Pad (Fine, Medium & Coarse)

Accessories:



SA-60013P
3" Sanding Backup Pad



SA-3060SD #60 Grit

Sanding Disc 3" Dia.

SA-3080SD #80 Grit

Sanding Disc 3" Dia.

SA-3100SD #100 Grit

Sanding Disc 3" Dia.

SA-3120SD #120 Grit

Sanding Disc 3" Dia.



SA-60013SP
3" Surface Prep Pad
(Fine, Medium & Coarse)



SM-6002K

1/4" Mini Die Grinder Kit

Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|-----------|-----------------------------------|
| 1 pc | SM-6002 | Mini Die Grinder with Rubber Grip |
| 2 pc | #52227 | Spanner Wrench |
| 10 pcs | ST-512 | Complete Set of Wheel Stones |
| 1 pc | #51224-11 | 1/4" or 6 mm Collet (Installed) |
| 1 pc | #51224-12 | 1/8" or 3 mm Collet |

SM-6003VK

Mini Orbital Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|-------------|--------------------------------------|
| 1 pc | SM-6003V | Mini Orbital Sander with Rubber Grip |
| 1 pc | #600324 | Key Wrench |
| 1 pc | SA-6003V-2P | 2" Velcro Sanding Pad |
| 1 pc | SA-6003V-3P | 3" Velcro Sanding Pad (Installed) |
| 10 pcs | SA-2320GP | 2" Sanding Paper #320 Grit |
| 10 pcs | SA-2400GP | 2" Sanding Paper #400 Grit |
| 10 pcs | SA-2600GP | 2" Sanding Paper #600 Grit |
| 10 pcs | SA-3320GP | 3" Sanding Paper #320 Grit |
| 10 pcs | SA-3400GP | 3" Sanding Paper #400 Grit |
| 10 pcs | SA-3600GP | 3" Sanding Paper #600 Grit |

Rubber Grip Color:



Accessories:



SA-6003V-2P
2" Velcro Sanding Pad



SA-6003V-3P
3" Velcro Sanding Pad

SM-6004K

3" Mini Polisher Kit



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|------|-------------|-----------------------------------|
| 1 pc | SM-6004 | 3" Mini Polisher with Rubber Grip |
| 1 pc | #51228 | Spanner Wrench |
| 1 pc | SA-6003V-3P | 3" Velcro Sanding Pad (Installed) |
| 1 pc | SA-77213 | 3-1/2" Bonnet |
| 1 pc | SA-75543VC | 3-1/2" Yellow Compounding Pad |
| 1 pc | SA-75653VC | 3-1/2" White Compounding Pad |

Rubber Grip Color:



Accessories:



SA-77213
3-1/2" Bonnet



SA-75543VC
3-1/2" Yellow Compounding Pad



SA-75653VC
3-1/2" White Compounding Pad

Features:

- Ergonomic Handle Design
- Variable Speed Trigger
- Built-in Comfort Grip
- Handle Exhaust

Rubber Grip Color:



SM-72833-2
2" Mini Orbital Sander
- Orbit Dia. 4 mm

SM-72833-3
3" Mini Orbital Sander
- Orbit Dia. 4 mm



SM-72831-2
2" Mini Disc Sander

SM-72831-3
3" Mini Disc Sander



SM-72832
1/4" Mini Die Grinder
- Collet Size : 1/4" (6 mm) or 1/8" (3 mm)



SM-72834
3" Mini Polisher



SM-72835
2" Mini Grinder

SM-72835K Includes:

2" Mini Grinder Kit in Box Complete with:



SM-72835
2" Mini Grinder with #60 Grit Grinding Wheel (Installed)

#10012
Hex Key Wrench x 1 (3.0 x 70L)

#5A-7283A40
Pin Wrench x 1

#52227
Spanner Wrench x 1

SA-7283560
#60 Grit 2" Grinding Wheel x 1
SA-7283580
#80 Grit 2" Grinding Wheel x 1
SA-72835120
#120 Grit 2" Grinding Wheel x 1

Specifications:

Model No.	Free Speed (RPM)	Pad / Disc Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-72831-2	15,000	2 (50)	1/4"-20	1/4"	3/8 (10)	4 (113)	4.3 (109)	1.5 (0.7)
SM-72831-3	15,000	3 (75)	1/4"-20	1/4"	3/8 (10)	4 (113)	4.3 (109)	1.5 (0.7)
SM-72832	18,000	-	-	1/4"	3/8 (10)	4 (113)	4.6 (117)	1.2 (0.54)
SM-72833-2	15,000	2 (50)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	4 (113)	4.6 (117)	1.5 (0.7)
SM-72833-3	15,000	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	4 (113)	4.6 (117)	1.5 (0.7)
SM-72834	2,500	3 (75)	1/4"-20 or M6x1.0	1/4"	3/8 (10)	4 (113)	5.1 (130)	2 (0.9)
SM-72835	20,000	2 (50)	3/8"-24	1/4"	3/8 (10)	4 (113)	4 (102)	1.5 (0.7)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-72831K

Mini Disc Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|------------|---|
| 1 pc | SM-72831 | Mini Disc Sander with Rubber Grip |
| 1 pc | #52227 | Spanner Wrench |
| 1 pc | SA-60012P | 2" Sanding Backup Pad (Installed) |
| 10 pcs | SA-2060SD | #60 Grit Sanding Disc 2" Dia. |
| 10 pcs | SA-2080SD | #80 Grit Sanding Disc 2" Dia. |
| 10 pcs | SA-2120SD | #120 Grit Sanding Disc 2" Dia. |
| 3 pcs | SA-60012SP | 2" Surface Prep Pad (Fine, Medium & Coarse) |
| 1 pc | SA-60013P | 3" Sanding Backup Pad |
| 10 pcs | SA-3060SD | #60 Grit Sanding Disc 3" Dia. |
| 10 pcs | SA-3080SD | #80 Grit Sanding Disc 3" Dia. |
| 10 pcs | SA-3120SD | #120 Grit Sanding Disc 3" Dia. |
| 3 pcs | SA-60013SP | 3" Surface Prep Pad (Fine, Medium & Coarse) |

SM-72831-2K

2" Mini Disc Sander Kit



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|------------|---|
| 1 pc | SM-72831-2 | Mini Disc Sander with Rubber Grip |
| 1 pc | #52227 | Spanner Wrench |
| 1 pc | SA-60012P | 2" Sanding Backup Pad (Installed) |
| 10 pcs | SA-2060SD | #60 Grit Sanding Disc 2" Dia. |
| 10 pcs | SA-2080SD | #80 Grit Sanding Disc 2" Dia. |
| 10 pcs | SA-2120SD | #120 Grit Sanding Disc 2" Dia. |
| 3 pcs | SA-60012SP | 2" Surface Prep Pad (Fine, Medium & Coarse) |

Accessories:



SA-60012P
2" Sanding Backup Pad



SA-2060SD #60 Grit
Sanding Disc 2" Dia.

SA-2080SD #80 Grit
Sanding Disc 2" Dia.

SA-2100SD #100 Grit
Sanding Disc 2" Dia.

SA-2120SD #120 Grit
Sanding Disc 2" Dia.



SA-60012SP
2" Surface Prep Pad
(Fine, Medium & Coarse)

SM-72831-3K

3" Mini Disc Sander Kit



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|------------|---|
| 1 pc | SM-72831-3 | Mini Disc Sander with Rubber Grip |
| 1 pc | #52227 | Spanner Wrench |
| 1 pc | SA-60013P | 3" Sanding Backup Pad (Installed) |
| 10 pcs | SA-3060SD | #60 Grit Sanding Disc 3" Dia. |
| 10 pcs | SA-3080SD | #80 Grit Sanding Disc 3" Dia. |
| 10 pcs | SA-3120SD | #120 Grit Sanding Disc 3" Dia. |
| 3 pcs | SA-60013SP | 3" Surface Prep Pad (Fine, Medium & Coarse) |

Accessories:



SA-60013P
3" Sanding Backup Pad



SA-3060SD #60 Grit
Sanding Disc 3" Dia.

SA-3080SD #80 Grit
Sanding Disc 3" Dia.

SA-3100SD #100 Grit
Sanding Disc 3" Dia.

SA-3120SD #120 Grit
Sanding Disc 3" Dia.



SA-60013SP
3" Surface Prep Pad
(Fine, Medium & Coarse)

SM-72832K

Mini Die Grinder Kit



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|-----------|-----------------------------------|
| 1 pc | SM-72832 | Mini Die Grinder with Rubber Grip |
| 2 pc | #52227 | Spanner Wrench |
| 10 pcs | ST-512 | Complete Set of Wheel Stones |
| 1 pc | #51224-11 | 1/4" or 6 mm Collet (Installed) |
| 1 pc | #51224-12 | 1/8" or 3 mm Collet |

Rubber Grip Color:



SM-72833K

Mini Orbital Sander Kit (2" & 3")



Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|--------|-------------|--------------------------------------|
| 1 pc | SM-72833 | Mini Orbital Sander with Rubber Grip |
| 1 pc | #600324 | Key Wrench |
| 1 pc | SA-6003V-2P | 2" Velcro Sanding Pad |
| 1 pc | SA-6003V-3P | 3" Velcro Sanding Pad (Installed) |
| 10 pcs | SA-2320GP | 2" Sanding Paper #320 Grit |
| 10 pcs | SA-2400GP | 2" Sanding Paper #400 Grit |
| 10 pcs | SA-2600GP | 2" Sanding Paper #600 Grit |
| 10 pcs | SA-3320GP | 3" Sanding Paper #320 Grit |
| 10 pcs | SA-3400GP | 3" Sanding Paper #400 Grit |
| 10 pcs | SA-3600GP | 3" Sanding Paper #600 Grit |

Rubber Grip Color:



Accessories:



SA-6003V-2P
2" Velcro Sanding Pad



SA-6003V-3P
3" Velcro Sanding Pad



SM-72834K

3" Mini Polisher Kit

Kit Includes:

In Blow Molded Case Complete with:

- | | | |
|------|-------------|-----------------------------------|
| 1 pc | SM-72834 | 3" Mini Polisher with Rubber Grip |
| 1 pc | #51228 | Spanner Wrench |
| 1 pc | SA-6003V-3P | 3" Velcro Sanding Pad (Installed) |
| 1 pc | SA-77213 | 3-1/2" Bonnet |
| 1 pc | SA-75543VC | 3-1/2" Yellow Compounding Pad |
| 1 pc | SA-75653VC | 3-1/2" White Compounding Pad |

Rubber Grip Color:



Accessories:



SA-77213
3-1/2" Bonnet



SA-75543VC
3-1/2" Yellow
Compounding
Pad



SA-75653VC
3-1/2" White
Compounding
Pad



Features:

- Comfort Grip
- Safety Lever
- Silencer
- Swivel Connector Air Inlet



SM-6W-6060
6mm Belt Sander



SM-6W-6100
10mm Belt Sander - 10 mm x 330 mm

SM-6W-6102
13mm Belt Sander - 13 mm x 330 mm



SM-6W-6120
13mm Belt Sander - 13 mm x 610 mm



SM-6T-6200
20mm Belt Sander



SM-620SG
20mm Belt Sander



SM-6X-6300
30mm Belt Sander

Specifications:

Model No.	Free Speed (RPM)	Belt Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Folded Length Inch (mm)	Max. Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6W-6060	20,000	1/4 x 13 (6 x 330)	1/4"	3/8 (10)	4.2 (119)	8.1 (207)	13 (331)	1.8 (0.85)	84
SM-6W-6100	20,000	3/8 x 13 (10 x 330)	1/4"	3/8 (10)	4.2 (119)	8.1 (207)	13 (331)	1.8 (0.85)	84
SM-6W-6102	20,000	1/2 x 13 (13 x 330)	1/4"	3/8 (10)	4.2 (119)	8.1 (207)	13 (331)	1.8 (0.85)	84
SM-6W-6120	20,000	1/2 x 24 (13 x 610)	1/4"	3/8 (10)	4.2 (119)	12.2 (310)	18.2 (463)	2 (0.95)	84
SM-620SG	18,000	3/4 x 20-1/2 (20 x 520)	1/4"	3/8 (10)	4.2 (119)	9.8 (250)	16.1 (410)	3.3 (1.5)	84
SM-6T-6200	18,000	3/4 x 20-1/2 (20 x 520)	1/4"	3/8 (10)	4.2 (119)	10 (255)	16 (407)	3.5 (1.6)	84
SM-6X-6300	12,000	1-5/32 x 21-1/4 (30 x 540)	1/4"	3/8 (10)	4.2 (119)	10 (255)	16.5 (420)	5.0 (2.3)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Belt Sanders & Kit



SM-6W-6203

10mm Belt Sander - 10 mm x 330 mm



SM-6T-6202

20mm Belt Sander - 20 mm x 520 mm

Features:

- 4 pcs Interchangeable Contact Arms
- Kit Contents Both Normal Abrasive Belt and Surface Prep Belt
- Sanding **Track Adjustable**
- Safety Cover
- Comfort Grip
- Swivel Air Inlet
- **0.5 HP**

SM-6Z-6103K

Belt Sander Kit



SM-6Z-6103

Belt Sander




Surface Prep Belts



Part No.
6U-6103PB15

Surface Prep Belt (coarse)
13mm x 12", #150 grit



Part No.
6U-6103PB30

Surface Prep Belt (fine)
13mm x 12", #300 grit

Normal Abrasive Belts



Part No.
6U-6103060 (3 pcs)

13mm x 12", #60 grit
6U-6103080 (3 pcs)
13mm x 12", #80 grit

6U-6103120 (3 pcs)

13mm x 12", #120 grit

6X-6103060 (1 pc)

6mm x 12", #60 grit

6X-6103080 (1 pc)

6mm x 12", #80 grit

6X-6103120 (1 pc)

6mm x 12", #120 grit

Contact Arms



Part No.
6U-610341

Belt Size : 1/2" x 12"
(13 mm x 305 mm)



Part No.
6V-610341

Belt Size : 1/4" or 1/2" x 12"
(6 mm or 13 mm x 305 mm)



Part No.
6Y-610341

Belt Size : 1/2" x 12"
(13 mm x 305 mm)



Part No.
6X-610341

Belt Size : 1/4" x 12"
(6 mm x 305 mm)

Specifications:

Model No.	Free Speed (RPM)	Belt Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-6W-6203	20,000	3/8 x 13 (10 x 330)	1/4"	3/8 (10)	3.9 (110)	12 (305)	2.0 (0.9)
SM-6T-6202	18,000	3/4 x 20-1/2 (20 x 520)	1/4"	3/8 (10)	4.2 (119)	14.8 (376)	3.3 (1.5)
SM-6Z-6103	20,000	1/4 or 1/2 x 12 (6 or 13 x 305)	1/4"	3/8 (10)	3.9 (110)	11.4 (289)	2.2 (1.0)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- 4 Interchangeable Contact Arms
- Use Both Normal Abrasive Belt and Surface Prep Belt
- Comfort Grip
- Silencer For Lower Noise
- Swivel Air Inlet

SM-6Z-6104K

Belt Sander Kit



SM-6Z-6104

Belt Sander



Contact Arms



Part No.
6U-610341
Belt Size : 1/2" x 12"
(13 mm x 305 mm)



Part No.
6V-610341
Belt Size : 1/4" or 1/2" x 12"
(6 mm or 13 mm x 305 mm)



Part No.
6Y-610341
Belt Size : 1/2" x 12"
(13 mm x 305 mm)



Part No.
6X-610341
Belt Size : 1/4" x 12"
(6 mm x 305 mm)

Surface Prep Belts




Part No.
6U-6103PB15
Surface Prep Belt (coarse)
13mm x 12", #150 grit



Part No.
6U-6103PB30
Surface Prep Belt (fine)
13mm x 12", #300 grit

Normal Abrasive Belts



Part No.
6U-6103060 (3 pcs)
13mm x 12", #60 grit
6U-6103080 (3 pcs)
13mm x 12", #80 grit

6U-6103120 (3 pcs)
13mm x 12", #120 grit

6X-6103060 (1 pc)
6mm x 12", #60 grit

6X-6103080 (1 pc)
6mm x 12", #80 grit

6X-6103120 (1 pc)
6mm x 12", #120 grit

Specifications:

Model No.	Free Speed (RPM)	Belt Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6Z-6104	20,000	1/4 or 1/2 x 12 (6 or 13 x 305)	1/4"	3/8 (10)	4.2 (119)	12.3 (313)	2.2 (1.0)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- 6 Interchangeable Contact Arms
- Use Both Normal Abrasive Belt and Surface Prep Belt
- Dead Handle For Easy Operation
- Comfort Grip
- Silencer For Lower Noise
- Swivel Air Inlet

SM-6Z-6201

Belt Sander




SM-6Z-6201K

Belt Sander Kit



Sanding on Curve Surface



Surface Prep Belts



Normal Abrasive Belts



Part No.

SA-6S060AB

25mm x 18", #60 grit

SA-6S080AB

25mm x 18", #80 grit

SA-6T060AB

20mm x 18", #60 grit

SA-6T080AB

20mm x 18", #80 grit

SA-6U080AB

13mm x 18", #80 grit

SA-6U120AB

13mm x 18", #120 grit

SA-6V120AB

10mm x 18", #120 grit

SA-6V150AB

10mm x 18", #150 grit

SA-6X150AB

6mm x 18", #150 grit

Optional!

Optional!

Contact Arms



Part No.

SA-6S6201

Belt Size : 1" x 18"
(25 mm x 457 mm)

Optional!



Part No.

SA-6T6201

Belt Size : 5/8" or 3/4" x 18"
(16 mm or 20 mm x 457 mm)



Part No.

SA-6U6201

Belt Size : 3/4" x 18"
(20 mm x 457 mm)

Surface Prep Belts



Part No.

SA-6T080PB

Surface Prep Belt (coarse)
20mm x 18", #80 grit



Part No.

SA-6V6201

Belt Size : 1/8", 1/4", 3/8" or 1/2" x 18"
(3, 6, 10 or 13 x 457 mm)



Part No.

SA-6W6201

Belt Size : 1/2" x 18"
(13 mm x 457 mm)



Part No.

SA-6X6201

Belt Size : 1/4" x 18"
(6 mm x 457 mm)



Part No.

SA-6U300PB

Surface Prep Belt (fine)
13mm x 18", #300 grit

Specifications:

Model No.	Free Speed (RPM)	Belt Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-6Z-6201	18,000	1/4 ~ 1 (6 ~ 25)	1/4"	3/8 (10)	4.5 (119)	15.4 (390)	3.1 (1.4)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Versatility Belt Sander

Features:

- Quick and Easy Belt Change
- Belt Tracking Permits Use of 1/4" or 1/2" Wide x 24" Long Abrasive Belts
- Lightweight Composite Belt Guard
- Composite Motor Housing



SM-6Z-6105

Versatility Belt Sander



Specifications:

Model No.	Free Speed (RPM)	Belt Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-6Z-6105	20,000	1/4 & 1/2 (6 & 13) W x 24 (610) L	1/4"	3/8 (10)	4.2 (119)	15.7 (400)	3 (1.36)

* Recommended Air Pressure at 90 PSI (6.2 Bar)



Auto Shut-Off Screwdrivers & Angle Nutrunners

Features:

- **Oil Free** Air Motor
- **1,000,000** Cycles Life Time
- Power of The Motor : **150** Watt

SM-EP-0205T

Auto Shut-Off Screwdriver (150 RPM)

SM-EP-0705T

Auto Shut-Off Screwdriver (650 RPM)

SM-EP-1005T

Auto Shut-Off Screwdriver (950 RPM)

SM-EP-1404T

Auto Shut-Off Screwdriver (1,400 RPM)



SM-EL-0207L

Auto Shut-Off Angle Nutrunner (150 RPM)
- Lever Start

SM-EL-0705L

Auto Shut-Off Angle Nutrunner (650 RPM)
- Lever Start

SM-EL-1004L

Auto Shut-Off Angle Nutrunner (950 RPM)
- Lever Start

SM-EL-1403L

Auto Shut-Off Angle Nutrunner (1,400 RPM)
- Lever Start



Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Torque Range In-lbs (Nm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-EP-0205T	150	1/4"	3.5~44.3 (0.4~5)	1.8 (51)	7.5 (191)	1.79 (0.81)	71
SM-EP-0705T	650	1/4"	3.5~44.3 (0.4~5)	1.8 (51)	7 (178)	1.59 (0.72)	71
SM-EP-1005T	950	1/4"	3.5~39.8 (0.4~4.5)	1.8 (51)	7 (178)	1.59 (0.72)	71
SM-EP-1404T	1,400	1/4"	3.5~31 (0.4~3.5)	1.8 (51)	7 (178)	1.59 (0.72)	71
SM-EL-0207L	150	1/4"	7.1~44.3 (0.8~5)	1.6 (46)	11.3 (288)	1.65 (0.75)	73
SM-EL-0705L	650	1/4"	7.1~44.3 (0.8~5)	1.6 (46)	10.9 (276)	1.54 (0.7)	73
SM-EL-1004L	950	1/4"	7.1~35.4 (0.8~4)	1.6 (46)	10.9 (276)	1.54 (0.7)	73
SM-EL-1403L	1,400	1/4"	7.1~26.6 (0.8~3)	1.6 (46)	10.9 (276)	1.54 (0.7)	73

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Oil Free** Air Motor
- **1,000,000** Cycles Life Time
- Power of The Motor : **150** Watt

SM-ES-0205L

Auto Shut-Off Screwdriver (150 RPM)
- Lever Start

SM-ES-0705L

Auto Shut-Off Screwdriver (650 RPM)
- Lever Start

SM-ES-1005L

Auto Shut-Off Screwdriver (950 RPM)
- Lever Start

SM-ES-1404L

Auto Shut-Off Screwdriver (1,400 RPM)
- Lever Start



SM-ES-0205P

Auto Shut-Off Screwdriver (150 RPM)
- Push Start

SM-ES-0705P

Auto Shut-Off Screwdriver (650 RPM)
- Push Start

SM-ES-1005P

Auto Shut-Off Screwdriver (950 RPM)
- Push Start

SM-ES-1404P

Auto Shut-Off Screwdriver (1,400 RPM)
- Push Start



Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Torque Range In-lbs (Nm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-ES-0205L	150	1/4"	3.5~44.3 (0.4~5)	1.6 (46)	9.4 (240)	1.34 (0.61)	73
SM-ES-0705L	650	1/4"	3.5~44.3 (0.4~5)	1.6 (46)	9 (228)	1.32 (0.6)	73
SM-ES-1005L	950	1/4"	3.5~39.8 (0.4~4.5)	1.6 (46)	9 (228)	1.32 (0.6)	73
SM-ES-1404L	1,400	1/4"	3.5~31 (0.4~3.5)	1.6 (46)	9 (228)	1.32 (0.6)	73
SM-ES-0205P	150	1/4"	3.5~44.3 (0.4~5)	1.6 (46)	9.5 (241)	1.48 (0.67)	73
SM-ES-0705P	650	1/4"	3.5~44.3 (0.4~5)	1.6 (46)	9 (229)	1.3 (0.59)	73
SM-ES-1005P	950	1/4"	3.5~39.8 (0.4~4.5)	1.6 (46)	9 (229)	1.3 (0.59)	73
SM-ES-1404P	1,400	1/4"	3.5~31 (0.4~3.5)	1.6 (46)	9 (229)	1.3 (0.59)	73

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Oil-Free** Air Motor
- **1,000,000** Cycles Life Time
- Power of The Motor : **260** Watt

SM-BP-0412T

Auto Shut-Off Screwdriver (400 RPM)

SM-BP-0810T

Auto Shut-Off Screwdriver (800 RPM)

SM-BP-1008T

Auto Shut-Off Screwdriver (1,000 RPM)

SM-BP-1305T

Auto Shut-Off Screwdriver (1,300 RPM)

SM-BP-2004T

Auto Shut-Off Screwdriver (2,000 RPM)



Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Torque Range In-lbs (Nm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-BP-0412T	400	1/4"	31~106.2 (3.5~12)	2.1 (59)	8.3 (210)	2.3 (1.1)	73
SM-BP-0810T	800	1/4"	31~84.1 (3.5~9.5)	2.1 (59)	8.3 (210)	2.3 (1.1)	73
SM-BP-1008T	1,000	1/4"	31~70.8 (3.5~8)	2.1 (59)	8.3 (210)	2.3 (1.1)	73
SM-BP-1305T	1,300	1/4"	3.5~44.3 (0.4~5)	2.1 (59)	7.7 (195)	2.1 (1)	73
SM-BP-2004T	2,000	1/4"	3.5~35.4 (0.4~4)	2.1 (59)	7.7 (195)	2.1 (1)	73

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Auto Shut-Off Screwdrivers & Angle Nutrunners

Features:

- **Oil-Free** Air Motor
- **1,000,000** Cycles Life Time
- Power of The Motor : **260** Watt

SM-BS-0412L

Auto Shut-Off Screwdriver (400 RPM)
- Lever Start

SM-BS-1008L

Auto Shut-Off Screwdriver (1,000 RPM)
- Lever Start

SM-BS-2004L

Auto Shut-Off Screwdriver (2,000 RPM)
- Lever Start

SM-BS-0810L

Auto Shut-Off Screwdriver (850 RPM)
- Lever Start

SM-BS-1405L

Auto Shut-Off Screwdriver (1,350 RPM)
- Lever Start

Lever Start



SM-BS-0412P

Auto Shut-Off Screwdriver (400 RPM)
- Push Start

SM-BS-1008P

Auto Shut-Off Screwdriver (1,000 RPM)
- Push Start

SM-BS-2004P

Auto Shut-Off Screwdriver (2,000 RPM)
- Push Start


SM-BS-0810P

Auto Shut-Off Screwdriver (850 RPM)
- Push Start

SM-BS-1405P

Auto Shut-Off Screwdriver (1,350 RPM)
- Push Start

Push Start

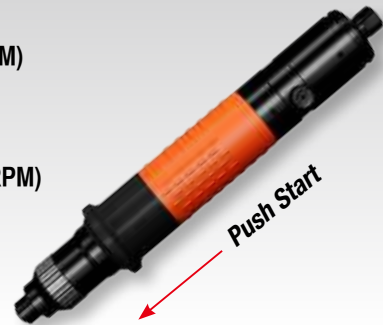

SM-CL-0426L

Auto Shut-Off Angle Nutrunner (350 RPM)
- Lever Start



Specifications:

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Torque Range In-lbs (Nm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-BS-0412L	400	1/4"	31~106.2 (3.5~12)	1.8 (51)	10.7 (271)	2.05 (0.93)	75
SM-BS-0810L	850	1/4"	31~84.1 (3.5~9.5)	1.8 (51)	10.7 (271)	2.05 (0.93)	75
SM-BS-1008L	1,000	1/4"	31~70.8 (3.5~8)	1.8 (51)	10.7 (271)	2.05 (0.93)	75
SM-BS-1405L	1,350	1/4"	3.5~44.3 (0.4~5)	1.8 (51)	9.9 (251)	1.87 (0.85)	75
SM-BS-2004L	2,000	1/4"	3.5~35.4 (0.4~4)	1.8 (51)	9.9 (251)	1.87 (0.85)	75
SM-BS-0412P	400	1/4"	31~106.2 (3.5~12)	1.8 (51)	10.7 (272)	2 (0.9)	75
SM-BS-0810P	850	1/4"	31~84.1 (3.5~9.5)	1.8 (51)	10.7 (272)	2 (0.9)	75
SM-BS-1008P	1,000	1/4"	31~70.8 (3.5~8)	1.8 (51)	10.7 (272)	2 (0.9)	75
SM-BS-1405P	1,350	1/4"	3.5~44.3 (0.4~5)	1.8 (51)	9.9 (252)	1.8 (0.8)	75
SM-BS-2004P	2,000	1/4"	3.5~35.4 (0.4~4)	1.8 (51)	9.9 (252)	1.8 (0.8)	75
SM-CL-0426L	350	1/4"	101.8~230.1 (11.5~26)	3 (85)	13 (331)	3.19 (1.45)	75

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Auto Shut-Off Screwdrivers

Features:

- Pistol Version with Air On Top
- with 2 Extra Springs for Different Torque
- Reversible
- Rear Exhaust
- Built-in Cushion Grip
- **Low Noise 83 dB(A)**



▲ Operation of Auto Shut-Off Screwdriver



▲ Operation of Auto Shut-Off Screwdriver



Air On Top



Adjustable Torque

SM-AS004

Auto Shut-off Screwdriver (600 RPM)

SM-AS104


Auto Shut-off Screwdriver (1,000 RPM)

SM-AS204

Auto Shut-off Screwdriver (1,800 RPM)

SM-AS304

Auto Shut-off Screwdriver (2,300 RPM)

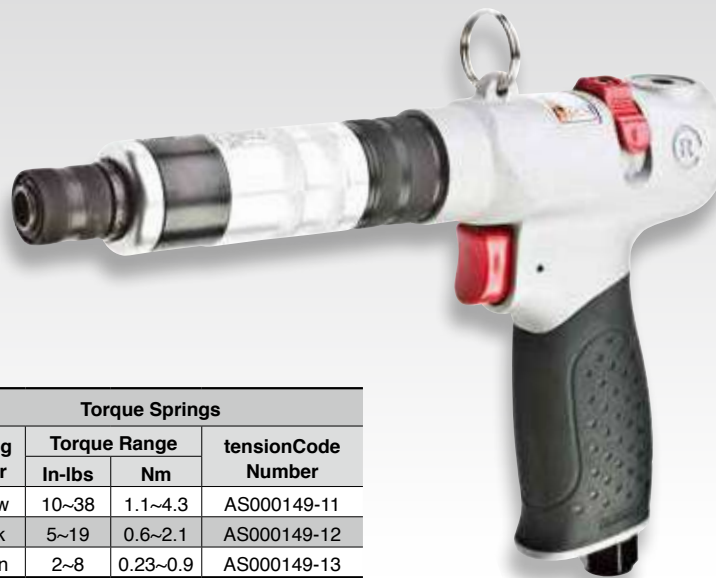

Torque Springs			
Spring Color	Torque Range		tensionCode Number
	In-lbs	Nm	
Yellow	10~38	1.1~4.3	AS000149-11
Black	5~19	0.6~2.1	AS000149-12
Green	2~8	0.23~0.9	AS000149-13

Accessories (Optional):



AS000149-11SUB

Cam Assembly
Torque Range : 10~38 In-lbs



AS000149-12SUB

Cam Assembly
Torque Range : 5~19 In-lbs



AS000149-13SUB

Cam Assembly
Torque Range : 2~8 In-lbs

▼ Adjusting springs of three different tensions are available for adjustment of torque




AS000149-11

Strong Spring (ø 3.5 mm)
(Good for SM-AS004, SM-AS104)



AS000149-12

Medium Spring (ø 2.8 mm)
(Good for SM-AS204)



AS000149-13

Light Spring (ø 2.0 mm)

Specifications:

Model No.	Free Speed (RPM)	Torque Range In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-AS004	600	4~45 (0.5~5.1)	1/4"	3/8 (10)	4 (113)	8.9 (225)	2.0 (0.9)	83
SM-AS104	1,000	3~40 (0.3~4.5)	1/4"	3/8 (10)	4 (113)	8.5 (216)	2.0 (0.9)	83
SM-AS204	1,800	3~26 (0.3~2.9)	1/4"	3/8 (10)	4 (113)	8.7 (220)	2.0 (0.9)	83
SM-AS304	2,300	3~26 (0.3~2.9)	1/4"	3/8 (10)	4 (113)	8.5 (215)	2.0 (0.9)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Auto Shut-Off Screwdrivers

Features:

- with 2 Extra Springs for Different Torque
- Built-in Cushion Grip
- Reversible
- Rear Exhaust
- **Low Noise 83 dB(A)**

Accessories (Optional):



AS000149-11SUB

Cam Assembly
Torque Range : 10~38 In-lbs



AS000149-12SUB

Cam Assembly
Torque Range : 5~19 In-lbs



AS000149-13SUB

Cam Assembly
Torque Range : 2~8 In-lbs




AS000149-11

Strong Spring (ø 3.5 mm)
(Good for SM-AS004, SM-AS104)



AS000149-11

Medium Spring (ø 2.8 mm)
(Good for SM-AS204)



AS000149-13

Light Spring (ø 2.0 mm)

SM-AS002 / SM-AS102 / SM-AS202

Auto Shut-off Screwdriver (600 / 1,000 / 1,800 RPM)



SM-AS002A / SM-AS102A / SM-AS202A

Auto Shut-off Screwdriver (600 / 1,000 / 1,800 RPM)



SM-AS005 / SM-AS105 / SM-AS205 / SM-AS305

Auto Shut-off Screwdriver (650 / 1,100 / 1,800 / 2,300 RPM)



Specifications:

Model No.	Free Speed (RPM)	Torque Range In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-AS002 / SM-AS002A	600	4~45 (0.5~5.1)	1/4"	3/8 (10)	4 (113)	8.7 (222)	1.98 (0.9)	83
SM-AS102 / SM-AS102A	1,000	3~40 (0.3~4.5)	1/4"	3/8 (10)	4 (113)	8.3 (212)	1.98 (0.9)	83
SM-AS202 / SM-AS202A	1,800	3~26 (0.3~2.9)	1/4"	3/8 (10)	4 (113)	8.6 (218)	1.98 (0.9)	83
SM-AS005	650	4~45 (0.5~5.1)	1/4"	3/8 (10)	4 (113)	9.3 (237)	1.54 (0.7)	83
SM-AS105	1,100	3~40 (0.3~4.5)	1/4"	3/8 (10)	4 (113)	8.9 (227)	1.54 (0.7)	83
SM-AS205	1,800	3~26 (0.3~2.9)	1/4"	3/8 (10)	4 (113)	9.1 (232)	1.54 (0.7)	83
SM-AS305	2,500	3~26 (0.3~2.9)	1/4"	3/8 (10)	4 (113)	8.9 (227)	1.54 (0.7)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Air Screwdrivers

Features:

- Ergonomic Handle Design
- **Variable Speed Trigger**
- **Forward and Reverse Control on Top**
- Built-in Comfort Grip
- Rotating Air Inlet
- Handle Exhaust

SM-88-7251

1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-7251

1/4" Air Screwdriver (800 RPM)
- Direct Drive



Features:

- Ergonomic Handle Design
- **Variable Speed Trigger**
- **Built-in Comfort Grip**
- Forward and Reverse Control Bar
- Handle Exhaust

SM-88-8225

1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-8225

1/4" Air Screwdriver (800 RPM)
- Direct Drive



SM-88-8020

1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-8020

1/4" Air Screwdriver (800 RPM)
- Direct Drive



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-88-7251	1,800	1/4	1/4"	3/8 (10)	4 (113)	7.2 (182)	2.4 (1.1)
SM-89-7251	800	1/4	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.9 (1.3)
SM-88-8225	1,800	1/4	1/4"	3/8 (10)	4 (113)	6.8 (172)	2.4 (1.1)
SM-89-8225	800	1/4	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.9 (1.3)
SM-88-8020	1,800	1/4	1/4"	3/8 (10)	4 (113)	7.1 (180)	2.2 (1)
SM-89-8020	800	1/4	1/4"	3/8 (10)	4 (113)	8 (202)	2.6 (1.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Air Screwdrivers

Features:

- **Composite Motor Housing Double Injection**
- Planetary Gear System with Needle Bearings (Option)
- Reversing Bar on the Both Sides
- **Two Speed Trigger**
(Slow speed when pulled halfway)
- **Patented Silencer 83 dB(A)**
- **0.5 HP**

SM-88-7253P

1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-7253P

1/4" Air Screwdriver (800 RPM)
- Direct Drive



Features:

- **Composite Motor Housing**
- Planetary Gear System with Needle Bearings (Option)
- Reversing Bar on the Both Sides
- **Two Speed Trigger**
(Slow speed when pulled halfway)
- **Patented Silencer 83 dB(A)**
- **0.5 HP**

SM-88-7254P

1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-7254P

1/4" Air Screwdriver (800 RPM)
- Direct Drive



Specifications:



Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-88-7253P	1,800	1/4	52 (6)	1/4"	3/8 (10)	4 (113)	7.2 (182)	2.4 (1.1)	83
SM-89-7253P	800	1/4	130 (15)	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.8 (1.3)	83
SM-88-7254P	1,800	1/4	52 (6)	1/4"	3/8 (10)	4 (113)	7.2 (182)	2.4 (1.1)	83
SM-89-7254P	800	1/4	130 (15)	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.8 (1.3)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

Features:

- **External Adjustable**
- **Forward: Adjustable Torque**
Reverse: Full Torque
- Planetary Gear System with Needle Bearings (Option)
- Variable Speed Trigger
- Muffler in Handle

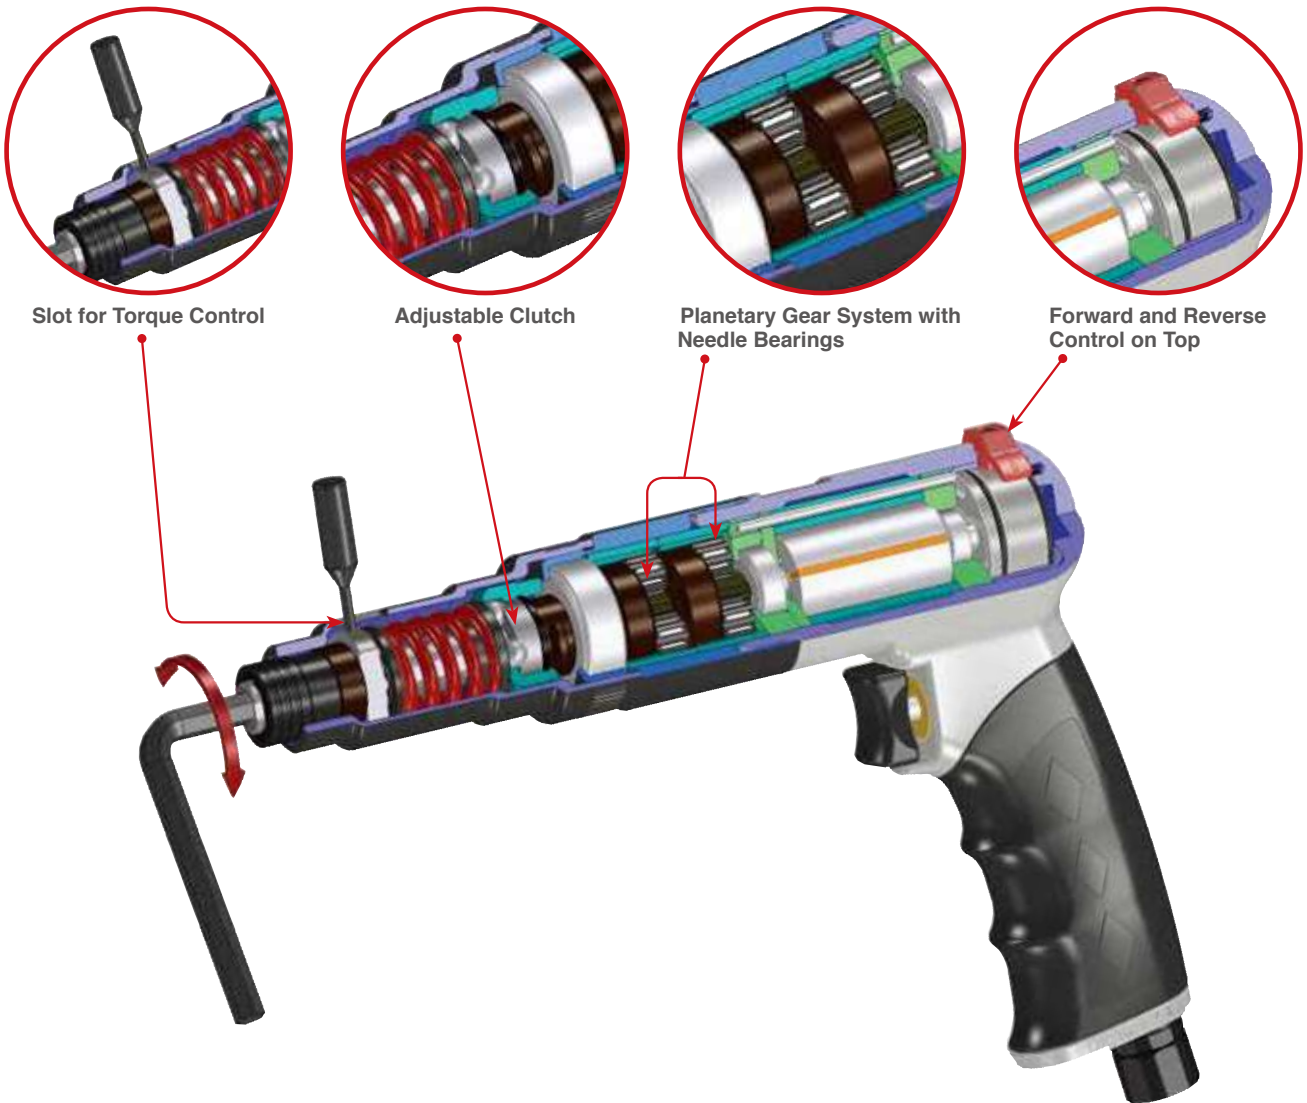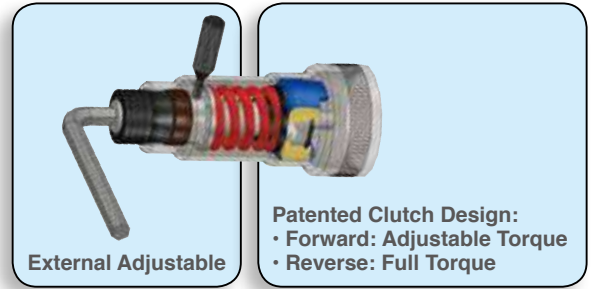

1/4" Industrial Air Screwdrivers

Features:

- **Cushion Clutch with External Clutch Adjustment**
- **Forward : Adjustable Torque**
Reverse : Full Torque
- **Composite Motor Housing**
- **Low Noise 83 dB(A)**
- Planetary Gear System with Needle Bearings (Option)
- Reversing Bar on Both Sides
- Two Speed Trigger (Slow speed when pulled halfway)
- **0.5 HP**

Quiet Series

SM-82-7253P

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-83-7253P

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-7253P

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-86-7253P

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-82-7253PF

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable

SM-83-7253PF

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch




▲ External Adjustable

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-82-7253P	1,800	1/4	30~70 (3~8)	1/4"	3/8 (10)	4 (113)	8.2 (208)	2.2 (1.0)	83
SM-83-7253P	800	1/4	30~95 (3~11)	1/4"	3/8 (10)	4 (113)	9 (228)	2.6 (1.2)	83
SM-84-7253P	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.2 (1.0)	83
SM-86-7253P	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.4 (1.1)	83
SM-82-7253PF	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	8.2 (208)	2.2 (1.0)	83
SM-83-7253PF	800	1/4	45~80 (5~9)	1/4"	3/8 (10)	4 (113)	9 (228)	2.6 (1.2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

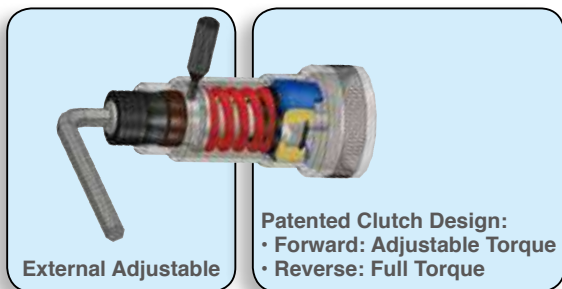

#802F37-11

Red Spring (ø 3.2 mm)
Torque Range : 20~50 In-lbs



#802F37-12

Blue Spring (ø 3.5 mm)
Torque Range : 40~85 In-lbs

▲ Adjusting springs of 2 different tensions are available for external adjustment of torque.

SM-82-7254P

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-83-7254P

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-7254P

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-86-7254P

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-82-7254PF

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-83-7254PF

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



▲ External Adjustable



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-82-7254P	1,800	1/4	30~70 (3~8)	1/4"	3/8 (10)	4 (113)	8.2 (208)	2.2 (1.0)	83
SM-83-7254P	800	1/4	30~95 (3~11)	1/4"	3/8 (10)	4 (113)	9 (228)	2.6 (1.2)	83
SM-84-7254P	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.2 (1.0)	83
SM-86-7254P	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.4 (1.1)	83
SM-82-7254PF	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.2 (1.0)	83
SM-83-7254PF	800	1/4	40~85 (5~9)	1/4"	3/8 (10)	4 (113)	8.4 (214)	2.6 (1.2)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

Features:

- **Ergonomic Handle Design**
- **Variable Speed Trigger**
- Planetary Gear System with Needle Bearings (Option)
- Built-in Comfort Grip
- Forward and Reverse Control on Top & Painted in Red
- Rotating Air Inlet
- Handle Exhaust
- **Low Noise 83 dB(A)**

Quiet Series



SM-82-7251

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-83-7251

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-7251

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-86-7251


1/4" Air Screwdriver (800 RPM)
- Positive Clutch

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-82-7251	1,800	1/4	30~70 (3~8)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.9 (1.3)	83
SM-83-7251	800	1/4	30~95 (3~11)	1/4"	3/8 (10)	4 (113)	8.4 (214)	3.1 (1.4)	83
SM-84-7251	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.2 (182)	2.6 (1.2)	83
SM-86-7251	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	7.4 (188)	3.5 (1.6)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

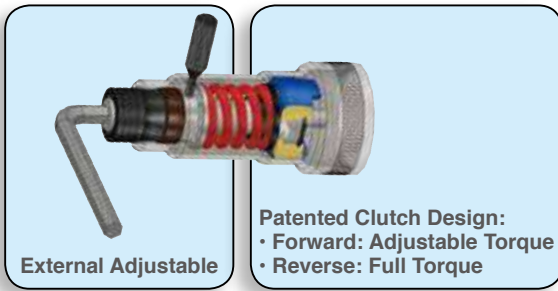

#802F37-11
Red Spring (ø 3.2 mm)
Torque Range : 20~50 In-lbs



#802F37-12
Blue Spring (ø 3.5 mm)
Torque Range : 40~85 In-lbs

▲ Adjusting springs of 2 different tensions are available for external adjustment of torque.

SM-82-7251F

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-83-7251F

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-80-7251

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-85-7251

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-81-7251

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-87-7251

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



▲ External Adjustable



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-82-7251F	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.9 (1.3)	83
SM-83-7251F	800	1/4	40~85 (5~10)	1/4"	3/8 (10)	4 (113)	8.4 (214)	3.1 (1.4)	83
SM-80-7251	1,800	1/4	20~62 (2~7)	1/4"	3/8 (10)	4 (113)	8.8 (224)	3.3 (1.5)	83
SM-85-7251	800	1/4	20~100 (2~11)	1/4"	3/8 (10)	4 (113)	9.5 (242)	3.5 (1.6)	83
SM-81-7251	1,800	1/4	26~71 (3~8)	1/4"	3/8 (10)	4 (113)	7.7 (196)	3.2 (1.45)	83
SM-87-7251	800	1/4	44~100 (5~11)	1/4"	3/8 (10)	4 (113)	8.4 (214)	3.5 (1.6)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

Features:

- **Ergonomic Handle Design**
- **Variable Speed Trigger**
- Planetary Gear System with Needle Bearings (Option)
- Built-in Comfort Grip
- Handle Exhaust
- **Low Noise 83 dB(A)**



SM-8225

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-8235

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-8245

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-8265


1/4" Air Screwdriver (800 RPM)
- Positive Clutch

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-8225	1,800	1/4	30~70 (3~8)	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.6 (1.2)	83
SM-8235	800	1/4	30~95 (3~11)	1/4"	3/8 (10)	4 (113)	8.5 (216)	3 (1.4)	83
SM-8245	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.2 (184)	2.8 (1.3)	83
SM-8265	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.8 (1.3)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

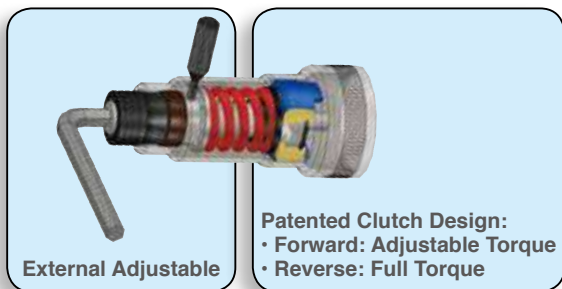

#802F37-11

Red Spring (ø 3.2 mm)
Torque Range : 20~50 In-lbs



#802F37-12

Blue Spring (ø 3.5 mm)
Torque Range : 40~85 In-lbs

▲ Adjusting springs of 2 different tensions are available for external adjustment of torque.



Specifications:


Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-8225F	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	7.7 (196)	2.9 (1.3)	83
SM-8235F	800	1/4	40~85 (5~10)	1/4"	3/8 (10)	4 (113)	8.4 (214)	3 (1.4)	83
SM-9825	1,800	1/4	20~62 (2~7)	1/4"	3/8 (10)	4 (113)	8.7 (222)	3.3 (1.5)	83
SM-9835	800	1/4	20~100 (2~11)	1/4"	3/8 (10)	4 (113)	9.5 (241)	3.5 (1.6)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Industrial Air Screwdrivers

Features:

- **External Adjustable Clutch**
- **Forward: Adjustable Torque**
Reverse: Full Torque
- Planetary Gear System with Needle Bearings (Option)
- **Low Noise 85 dB(A)**
(SM-82-8423F & SM-83-8423F)

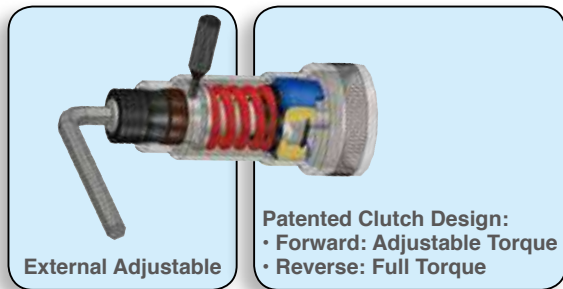

#802F37-11
Red Spring (ø 3.2 mm)
Torque Range : 20~50 In-lbs



#802F37-12
Blue Spring (ø 3.5 mm)
Torque Range : 40~85 In-lbs

▲ Adjusting springs of 2 different tensions are available for external adjustment of torque.



SM-842F
1/4" Straight Air Screwdriver (1,800 RPM)
- External Adjustable Clutch

▲ External Adjustable



SM-843F
1/4" Straight Air Screwdriver (800 RPM)
- External Adjustable Clutch

▲ External Adjustable



SM-82-8423F
1/4" Straight Air Screwdriver (1,800 RPM)
- External Adjustable Clutch

▲ External Adjustable



SM-83-8423F
1/4" Straight Air Screwdriver (800 RPM)
- External Adjustable Clutch

▲ External Adjustable

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-842F	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	9.6 (244)	2.4 (1.1)	90
SM-843F	800	1/4	40~85 (5~10)	1/4"	3/8 (10)	4 (113)	10.2 (260)	2.6 (1.2)	90
SM-82-8423F	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	10.0 (254)	2.6 (1.2)	85
SM-83-8423F	800	1/4	40~85 (5~10)	1/4"	3/8 (10)	4 (113)	10.7 (272)	3 (1.4)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Composite Housing Series



NEW

Impact Wrenches, Impact Driver, Screwdrivers

Features:

- **Composite Motor Housing**
- Handle Exhaust

SM-40-7500
1/4" Mini Impact Wrench



SM-41-7500
3/8" Mini Impact Wrench



SM-48-7500
1/4" Impact Driver



Patent No.

US D727,706 S
TW D159601 M510220
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Anvil (or Chuck) Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-40-7500	12,000	1/4 (6)	75 (102)	25~70 (34-95)	1/4"	3/8 (10)	4 (113)	6.7 (170)	2.2 (1.0)
SM-41-7500	12,000	3/8 (10)	100 (136)	25~90 (34~122)	1/4"	3/8 (10)	4 (113)	6.9 (174)	2.2 (1.0)
SM-48-7500	12,000	1/4 (Hex)	75 (102)	25~40 (34~54)	1/4"	3/8 (10)	4 (113)	7.1 (181)	2.2 (1.0)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Composite Motor Housing**
- Planetary Gear System with Needle Bearings (Option)
- **Variable Speed Trigger**
- **0.5 HP**

SM-88-7500
1/4" Air Screwdriver (1,800 RPM)
- Direct Drive



SM-89-7500
1/4" Air Screwdriver (800 RPM)
- Direct Drive



Patent No.


US D727,706 S
TW D159601 M510220
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-88-7500	1,800	1/4	52 (6)	1/4"	3/8 (10)	4 (113)	7.1 (181)	2.0 (0.9)
SM-89-7500	800	1/4	130 (15)	1/4"	3/8 (10)	4 (113)	7.8 (199)	2.4 (1.1)

* Recommended Air Pressure at 90 PSI (6.2 Bar)


Screwdrivers

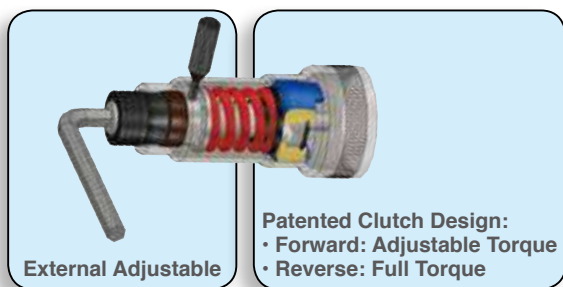

▼ Adjusting springs of 2 different tensions are available for external adjustment of torque.



#802F37-11
Red Spring (ø 3.2 mm)
Torque Range : 20~50 In-lbs



#802F37-12
Blue Spring (ø 3.5 mm)
Torque Range : 40~85 In-lbs

Patent No.

US D727,706 S
TW D159601 M510220
Patent Pending in Multi-Countries

SM-82-7500

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-83-7500

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-7500

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-86-7500

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-82-7500F

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



▲ External Adjustable



SM-83-7500F

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



▲ External Adjustable



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-82-7500	1,800	1/4	30~70 (3~8)	1/4"	3/8 (10)	4 (113)	8.3 (210)	2.4 (1.1)
SM-83-7500	800	1/4	30~95 (3~11)	1/4"	3/8 (10)	4 (113)	9 (229)	2.6 (1.2)
SM-84-7500	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.4 (187)	2.2 (1.0)
SM-86-7500	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	8.1 (205)	2.4 (1.1)
SM-82-7500F	1,800	1/4	20~50 (2~6)	1/4"	3/8 (10)	4 (113)	8.3 (210)	2.4 (1.1)
SM-83-7500F	800	1/4	40~85 (5~10)	1/4"	3/8 (10)	4 (113)	9 (229)	2.6 (1.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Composite Motor Housing**
- **Variable Speed Trigger**
- Planetary Gear System with Needle Bearings (Option)
- **0.5 HP**



#10035-11
3/8" Standard keyed chuck



#10035-12
3/8" Standard keyless chuck



#10035-13
3/8" Industrial keyed chuck



#10035-14
3/8" Industrial keyless chuck



#75-725139-11S
Side Handle



#822339-11S
Side Handle



#10033-11
1/2" Standard keyed chuck



#10033-12
1/2" Standard keyless chuck



#10033-13
1/2" Industrial keyed chuck



#10033-14
1/2" Industrial keyless chuck

Patent No.

US D727,706 S
TW D159601 M510220
Patent Pending in Multi-Countries

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-75-7500-02	2,000	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.7 (195)	2.2 (1.0)
SM-74-7500-02	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.6 (219)	2.9 (1.3)
SM-77-7500-02	400	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.1 (231)	3.3 (1.5)
SM-71-7100-01	2,200	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.4 (189)	2.2 (1.0)
SM-76-7100-01	2,600	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.3 (186)	2.2 (1.0)
SM-73-7100-01	500	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9 (228)	3.3 (1.5)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-75-7500-02

3/8" Reversible Air Drill (2,000 RPM)
- Standard Keyless Chuck

▶ Reversible



SM-74-7500-02

1/2" Reversible Air Drill (800 RPM)
- Standard Keyless Chuck

▼ Reversible



SM-77-7500-02

1/2" Reversible Air Drill (400 RPM)
- Standard Keyless Chuck

▼ Reversible



SM-71-7100-01

3/8" Non-Reversible Air Drill (2,200 RPM)
- Standard Keyed Chuck

▶ 2-Gears Type



SM-76-7100-01

3/8" Non-Reversible Air Drill (2,600 RPM)
- Standard Keyed Chuck

▶ 3-Gears Type



SM-73-7100-01

1/2" Non-Reversible Air Drill (500 RPM)
- Standard Keyed Chuck





SUNMATCH
Professional Pneumatic Tools



1/4" Mini Air Drills

Features:

- Full-Cage Gear Design for Better Durability
- Variable Speed Trigger
- Built-In Comfort Grip
- Front Exhaust



SM-7281
1/4" Mini Air Drill (2,800 RPM)
- Standard Keyed Chuck



◀ Reversible



SM-78-7281R
1/4" Mini Reversible Air Drill (2,500 RPM)
- Standard Keyed Chuck

Features:

- Full-Cage Gear Design for Better Durability
- Variable Speed Trigger
- Built-In Comfort Grip
- Handle Exhaust



SM-7282
1/4" Mini Air Drill (2,800 RPM)
- Standard Keyed Chuck



SM-7282NK
1/4" Mini Air Drill (2,800 RPM)
- Standard Keyless Chuck



SM-7283
1/4" Mini Air Drill (2,800 RPM)
- Standard Keyed Chuck



SM-7283NK
1/4" Mini Air Drill (2,800 RPM)
- Standard Keyless Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-7281	2,800	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.5 (140)	1.5 (0.7)
SM-78-7281R	2,500	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	6.1 (155)	1.8 (0.8)
SM-7282	2,800	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.4 (137)	1.5 (0.7)
SM-7282NK	2,800	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.6 (142)	1.5 (0.7)
SM-7283	2,800	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.4 (137)	1.5 (0.7)
SM-7283NK	2,800	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.6 (142)	1.5 (0.7)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1/4" Mini Air Drills

Features:

- **Composite Motor Housing**
- **1/4" Keyed Chuck or 1/4" Keyless Chuck**
- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Planetary Gear System with Needle Bearings
- Compact Size
- **Patented Silencer 84 dB(A)**



SM-78-7284P-01
with 1/4" Standard keyed chuck



SM-78-7284P-02
with 1/4" Standard keyless chuck



SM-78-7284P-03
with 1/4" Industrial keyed chuck

Composite



SM-78-7284PR-01
with 1/4" Standard keyed chuck



SM-78-7284PR-02
with 1/4" Standard keyless chuck



SM-78-7284PR-03
with 1/4" Industrial keyed chuck

SM-78-7284P

1/4" Non-Reversible Mini Air Drill
(2,600 RPM)
- Standard Keyed Chuck



SM-78-7284P-02

1/4" Non-Reversible Mini Air Drill
(2,600 RPM)
- Standard Keyless Chuck



SM-78-7284PR

1/4" Reversible Mini Air Drill
(2,600 RPM)
- Standard Keyed Chuck



SM-78-7284PR-02

1/4" Reversible Mini Air Drill
(2,600 RPM)
- Standard Keyless Chuck



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-78-7284P	2,600	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.8 (148)	1.3 (0.6)	84
SM-78-7284PR	2,600	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.8 (148)	1.3 (0.6)	84
SM-78-7284P-02	2,600	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.8 (148)	1.3 (0.6)	84
SM-78-7284PR-02	2,600	1/4 (6)	3/8"-24	1/4"	3/8 (10)	4 (113)	5.8 (148)	1.3 (0.6)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Composite Motor Housing Double Injection**
- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Reversing Bar on Both Sides
- Planetary Gear System with Needle Bearings (Option)
- **Patented Silencer 83 dB(A)**
- **0.5 HP**



SM-75-7253P-01
with 3/8" Standard keyed chuck



SM-75-7253P-02
with 3/8" Standard keyless chuck



SM-75-7253P-03
with 3/8" Industrial keyed chuck



SM-75-7253P-04
with 3/8" Industrial keyless chuck



#75-725139-11S
Side Handle



SM-74-7253P-01
with 1/2" Standard keyed chuck



SM-74-7253P-02
with 1/2" Standard keyless chuck



SM-74-7253P-03
with 1/2" Industrial keyed chuck



SM-74-7253P-04
with 1/2" Industrial keyless chuck

SM-76-7253P

3/8" Non-Reversible Air Drill
(2,600 RPM)
- Standard Keyless Chuck



Patent No.

US D582,237 S
TW M346502 / M346497 / M350449

SM-75-7253P

3/8" Reversible Air Drill
(1,800 RPM)
- Standard Keyless Chuck



SM-72-7253P

1/2" Non-Reversible Air Drill
(1,000 RPM)
- Standard Keyless Chuck



SM-74-7253P

1/2" Reversible Air Drill
(800 RPM)
- Standard Keyless Chuck



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-76-7253P	2,600	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.4 (1.1)	83
SM-75-7253P	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.4 (1.1)	83
SM-72-7253P	1,000	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.9 (1.3)	83
SM-74-7253P	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.9 (1.3)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Composite Motor Housing**
- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Reversing Bar on Both Sides
- Planetary Gear System with Needle Bearings (Option)
- **Patented Silencer 83 dB(A)**
- **0.5 HP**



SM-75-7254P-01
with 3/8" Standard keyed chuck



SM-75-7254P-02
with 3/8" Standard keyless chuck



SM-75-7254P-03
with 3/8" Industrial keyed chuck



SM-75-7254P-04
with 3/8" Industrial keyless chuck



#75-725139-11S
Side Handle



SM-74-7254P-01
with 1/2" Standard keyed chuck



SM-74-7254P-02
with 1/2" Standard keyless chuck



SM-74-7254P-03
with 1/2" Industrial keyed chuck



SM-74-7254P-04
with 1/2" Industrial keyless chuck

SM-76-7254P

3/8" Non-Reversible Air Drill
(2,600 RPM)
- Standard Keyless Chuck



Patent No.

US D582,236 S
TW M346502 / M346497 / M350449

SM-75-7254P

3/8" Reversible Air Drill
(1,800 RPM)
- Standard Keyless Chuck



SM-72-7254P

1/2" Non-Reversible Air Drill
(1,000 RPM)
- Standard Keyless Chuck



SM-74-7254P

1/2" Reversible Air Drill
(800 RPM)
- Standard Keyless Chuck



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-76-7254P	2,600	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.4 (1.1)	83
SM-75-7254P	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.8 (197)	2.4 (1.1)	83
SM-72-7254P	1,000	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.9 (1.3)	83
SM-74-7254P	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.6 (218)	2.9 (1.3)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Composite Motor Housing
- Lightweight



SM-751P-02

3/8" Heavy Duty Air Drill (2,200 RPM)
- Standard Keyless Chuck

► Full-Cage Gear Design



SM-751P-04

3/8" Heavy Duty Air Drill (2,200 RPM)
- Industrial Keyless Chuck

► Full-Cage Gear Design



SM-7951P-02

3/8" Reversible Air Drill (1,800 RPM)
- Standard Keyless Chuck



SM-7951P-04

3/8" Reversible Air Drill (1,800 RPM)
- Industrial Keyless Chuck



SM-7941P-02

1/2" Reversible Air Drill (800 RPM)
- Standard Keyless Chuck



SM-7941P-04

1/2" Reversible Air Drill (800 RPM)
- Industrial Keyless Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-751P-02	2,200	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.1 (180)	2.5 (1.1)
SM-751P-04	2,200	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7 (179)	2.5 (1.1)
SM-7951P-02	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7 (179)	3 (1.4)
SM-7951P-04	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7 (177)	3 (1.4)
SM-7941P-02	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8 (203)	4 (1.8)
SM-7941P-04	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.1 (205)	4 (1.8)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- **Ergonomic Handle Design**
- **Variable Speed Trigger**
- Planetary Gear System with Needle Bearings (Option)
- Built-in Comfort Grip
- Forward and Reverse Control on Top & Painted in Red
- Rotating Air Inlet
- Handle Exhaust
- **Low Noise 83 dB(A)**



SM-76-7063-03

3/8" Non-Reversible Air Drill (2,600 RPM)
- Industrial Keyed Chuck



SM-75-7251-03

3/8" Reversible Air Drill (1,800 RPM)
- Industrial Keyed Chuck



SM-72-7063-03

1/2" Non-Reversible Air Drill (1,000 RPM)
- Industrial Keyed Chuck



SM-73-7063-03

1/2" Non-Reversible Air Drill (500 RPM)
- Industrial Keyed Chuck



SM-73-7251-03

1/2" Reversible Air Drill (400 RPM)
- Industrial Keyed Chuck



SM-74-7251-03

1/2" Reversible Air Drill (800 RPM)
- Industrial Keyed Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-76-7063-03	2,600	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.4 (187)	2.6 (1.2)	83
SM-75-7251-03	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.4 (187)	2.9 (1.3)	83
SM-72-7063-03	1,000	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.8 (224)	3.5 (1.6)	83
SM-73-7063-03	500	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.2 (233)	4 (1.8)	83
SM-73-7251-03	400	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.2 (233)	4 (1.8)	83
SM-74-7251-03	800	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.8 (224)	3.7 (1.7)	83

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Built-in Comfort Grip
- Rear Exhaust
- Variable Speed Trigger



SM-7915

3/8" Standard Duty Air Drill (2,600 RPM)
- Standard Keyed Chuck

- ▶ 3 Gears



SM-7955

3/8" Reversible Air Drill (1,800 RPM)
- Standard Keyed Chuck



SM-7985

3/8" Heavy Duty Air Drill (4,800 RPM)
- Standard Keyed Chuck

- ▶ Full-Cage Gear Design



SM-7511

3/8" Heavy Duty Air Drill (2,200 RPM)
- Standard Keyed Chuck

- ▶ Full-Cage Gear Design



SM-7531

1/2" Heavy Duty Air Drill (500 RPM)
- Standard Keyed Chuck

- ▶ Full-Cage Gear Design



SM-7935

1/2" Air Drill (1,000 RPM)
- Standard Keyed Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-7915	2,600	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.2 (184)	2.6 (1.2)
SM-7955	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.2 (184)	2.6 (1.2)
SM-7985	4,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.2 (184)	3.5 (1.6)
SM-7511	2,200	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.5 (191)	2.6 (1.2)
SM-7531	500	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9.3 (235)	3.5 (1.6)
SM-7935	1,000	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.5 (216)	3.3 (1.5)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Triple Full-Cage Design and Gears with Oilless Bushing to Ensure of Heavy Duty Gearing System
- Spring Loaded Rotor Vanes to Ensure of the Rotor Blades Fully Functioned (SM-7952-04 & SM-7942-03)
- Ergonomic Handle Design
- Built-in Comfort Grip
- Short Gear Case Design in the Front of Motor Housing
- with Dead Handle
- Handle Exhaust
- **Low Noise** (SM-7845-02, SM-7945-02, SM-7955-02)



SM-7955-02
3/8" Reversible Air Drill (1,650 RPM)
- Standard Keyless Chuck

▼ Short Gear Case Design in the Front of Motor Housing



SM-7942-03
1/2" Reversible Air Drill (500 RPM)
- Industrial Keyed Chuck

▼ Short Gear Case Design in the Front of Motor Housing



SM-7952-04
3/8" Reversible Air Drill (1,800 RPM)
- Industrial Keyless Chuck



SM-7845-02
1/2" Reversible Air Drill (350 RPM)
- Standard Keyless Chuck



SM-7945-02
1/2" Reversible Air Drill (650 RPM)
- Standard Keyless Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-7845-02	350	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.3 (210)	3.5 (1.6)
SM-7945-02	650	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	7.8 (197)	3.0 (1.4)
SM-7955-02	1,650	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	7 (178)	2.6 (1.2)
SM-7942-03	500	1/2 (13)	3/8"-24	1/4"	3/8 (10)	4 (113)	9 (229)	3.8 (1.7)
SM-7952-04	1,800	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	8 (203)	3.2 (1.5)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

3/8" Heavy Duty Angle Drills

Features:


- 90 Degree Angle Head
- **with Industrial Keyed Chuck** (Optional)
- Rear Exhaust
- Built-in Comfort Grip (SM-79-8423R)
- **Low Noise**



▲ Operation of 3/8" Reversible Angle Drill

SM-7091R

3/8" Reversible Angle Drill (1,200 RPM)
- Industrial Keyed Chuck



▲ Forward and Reverse

SM-79-8423R

3/8" Reversible Angle Drill (1,400 RPM)
- Industrial Keyed Chuck



▲ Forward and Reverse

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-7091R	1,200	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	8 (203)	2.5 (1.1)	-
SM-79-8423R	1,400	3/8 (10)	3/8"-24	1/4"	3/8 (10)	4 (113)	8.4 (214)	2.6 (1.2)	85

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Air Metal Shears

Features:

- **Cutting Capacity Steel 1.2 mm**
- Built-in Comfort Grip
- Variable Speed Trigger
- Rear Exhaust



▲ Operation of Air Metal Shear

SM-28-7063

Air Metal Shear



SM-2945

Air Metal Shear



Specifications:

Model No.	Blows Per Minute (BPM)	Cutting Capacity Steel (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-28-7063	2,600	1.2	1/4"	3/8 (10)	4 (113)	8.5 (217)	2.9 (1.3)
SM-2945	2,600	1.2	1/4"	3/8 (10)	4 (113)	8.5 (217)	3 (1.4)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1.0 HP Air Drills

Features:

- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Planetary Gear System
- **1.0 HP**

SM-7026A-03

3/8" Air Drill
- Industrial Keyed Chuck
- 2,600 RPM
- 1.0 HP

SM-7032A-03

3/8" Air Drill
- Industrial Keyed Chuck
- 3,200 RPM
- 1.0 HP

SM-7060A-03

3/8" Air Drill
- Industrial Keyed Chuck
- 6,000 RPM
- 1.0 HP

SM-7160A-03

1/4" Air Drill
- Industrial Keyed Chuck
- 6,000 RPM
- 1.0 HP




SM-7005A-03

1/2" Air Drill
- Industrial Keyed Chuck
- 500 RPM
- 1.0 HP

SM-7009A-03

1/2" Air Drill
- Industrial Keyed Chuck
- 900 RPM
- 1.0 HP

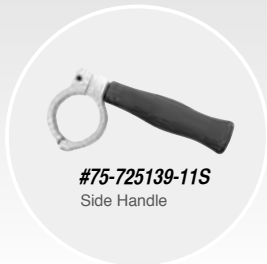

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Watt)
SM-7026A-03	2,600	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7032A-03	3,200	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7060A-03	6,000	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7160A-03	6,000	1/4 (6)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.6 (193)	2.0 (0.9)	1.0 (746)
SM-7005A-03	500	1/2 (13)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	9.6 (243)	2.9 (1.3)	1.0 (746)
SM-7009A-03	900	1/2 (13)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	9.6 (243)	2.9 (1.3)	1.0 (746)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

1.0 HP Air Drills

Features:

- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Planetary Gear System
- **1.0 HP**

SM-7026A-04

3/8" Air Drill
- Industrial Keyless Chuck
- 2,600 RPM
- 1.0 HP

SM-7032A-04

3/8" Air Drill
- Industrial Keyless Chuck
- 3,200 RPM
- 1.0 HP

SM-7060A-04

3/8" Air Drill
- Industrial Keyless Chuck
- 6,000 RPM
- 1.0 HP

SM-7160A-04

1/4" Air Drill
- Industrial Keyless Chuck
- 6,000 RPM
- 1.0 HP




SM-7005A-04

1/2" Air Drill
- Industrial Keyless Chuck
- 500 RPM
- 1.0 HP

SM-7009A-04

1/2" Air Drill
- Industrial Keyless Chuck
- 900 RPM
- 1.0 HP



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Watt)
SM-7026A-04	2,600	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7032A-04	3,200	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7060A-04	6,000	3/8 (10)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.9 (200)	2.2 (1.0)	1.0 (746)
SM-7160A-04	6,000	1/4 (6)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	7.6 (193)	2.0 (0.9)	1.0 (746)
SM-7005A-04	500	1/2 (13)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	9.6 (243)	2.9 (1.3)	1.0 (746)
SM-7009A-04	900	1/2 (13)	1/4"	3/8 (10)	29.7 (840)	3/8"-24	9.6 (243)	2.9 (1.3)	1.0 (746)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

0.5 HP Air Drills

Features:

- **Two Speed Trigger**
(Slow speed when pulled halfway)
- Planetary Gear System
- **0.5 HP**

SM-7029B-03

3/8" Air Drill
- Industrial Keyed Chuck
- 3,200 RPM
- 0.5 HP

SM-7038B-03

3/8" Air Drill
- Industrial Keyed Chuck
- 3,900 RPM
- 0.5 HP




SM-7138B-03

1/4" Air Drill
- Industrial Keyed Chuck
- 3,900 RPM
- 0.5 HP

SM-7017B-03

3/8" Air Drill
- Industrial Keyed Chuck
- 1,900 RPM
- 0.5 HP



SM-7029B-08

3/8" Air Drill
- Industrial Keyless Chuck
- 3,200 RPM
- 0.5 HP

SM-7038B-08

3/8" Air Drill
- Industrial Keyless Chuck
- 3,900 RPM
- 0.5 HP




SM-7138B-08

1/4" Air Drill
- Industrial Keyless Chuck
- 3,900 RPM
- 0.5 HP

SM-7017B-08

3/8" Air Drill
- Industrial Keyless Chuck
- 1,900 RPM
- 0.5 HP



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Watt)
SM-7029B-03	3,200	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	6.8 (173)	1.5 (0.7)	0.5 (373)
SM-7038B-03	3,900	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	6.8 (173)	1.5 (0.7)	0.5 (373)
SM-7138B-03	3,900	1/4 (6)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	6.5 (165)	1.3 (0.6)	0.5 (373)
SM-7017B-03	1,900	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	8.0 (204)	2.2 (1.0)	0.5 (373)
SM-7029B-08	3,200	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	7.6 (194)	1.5 (0.7)	0.5 (373)
SM-7038B-08	3,900	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	7.6 (194)	1.5 (0.7)	0.5 (373)
SM-7138B-08	3,900	1/4 (6)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	6.5 (165)	1.3 (0.6)	0.5 (373)
SM-7017B-08	1,900	3/8 (10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	8.9 (225)	2.2 (1.0)	0.5 (373)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

0.5 HP Air Drills

SM-7017C-03

3/8" Air Drill (1,900 RPM)

- Industrial Keyed Chuck
- 0.5 HP



Features:

- Long Life Time
- Planetary Gear System
- Side Handle (Optional)
- 0.5 HP

Optional!



#7017B56-12S
Side Handle
(Optional)

SM-7029C-03

3/8" Air Drill (3,200 RPM)

- Industrial Keyed Chuck
- 0.5 HP

SM-7038C-03

3/8" Air Drill (3,900 RPM)

- Industrial Keyed Chuck
- 0.5 HP

SM-7138C-03

1/4" Air Drill (3,900 RPM)

- Industrial Keyed Chuck
- 0.5 HP



SM-7017C-08

3/8" Air Drill (1,900 RPM)

- Industrial Keyless Chuck
- 0.5 HP



SM-7029C-08

3/8" Air Drill (3,200 RPM)

- Industrial Keyless Chuck
- 0.5 HP

SM-7038C-08

3/8" Air Drill (3,900 RPM)

- Industrial Keyless Chuck
- 0.5 HP



Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min) Free Speed	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)	Power HP (Watt)
SM-7017C-03	1,900	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	8.9 (226)	2.2 (1.0)	0.5 (373)
SM-7029C-03	3,200	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	7.7 (195)	1.8 (0.8)	0.5 (373)
SM-7038C-03	3,900	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	7.7 (195)	1.8 (0.8)	0.5 (373)
SM-7138C-03	3,900	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	7.3 (186)	1.5 (0.7)	0.5 (373)
SM-7017C-08	1,900	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	9.6 (244)	2.4 (1.1)	0.5 (373)
SM-7029C-08	3,200	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	8.4 (213)	2.0 (0.9)	0.5 (373)
SM-7038C-08	3,900	3/8(10)	1/4"	3/8 (10)	24.7 (700)	3/8"-24	8.4 (213)	2.0 (0.9)	0.5 (373)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Spot Drill

- with Enforced Lever



- Low Speed **800 RPM**
- High Torque
- 360° Swivel Steady Frame
- Tungsten Carbide Drill Bit (Optional)
- Low Noise **84 dB(A)**



Features:

- Low Speed **800 RPM** / High Torque
- **360° Swivel** on The Steady Frame
- **Tungsten Carbide Drill Bit** (Optional)
- Built-in Comfort Grip
- Handle Exhaust
- **Low Noise 84 dB(A)**



▲ Operation of Spot Drill



▲ Operation of Spot Drill

📺 **Demonstration on website :** <http://www.sunmatch.com/video.html>

SM-71-7802K

Spot Drill Kit



Accessories (Optional) :

3-Edge Cutter Tungsten Carbide Drill Bit

-  **#71-780139**
ø 10.3 x 47 mm
-  **#71-780140**
ø 8.3 x 47 mm
-  **#71-780141**
ø 6.3 x 47 mm

SM-71-7802

Spot Drill
- with Enforced Lever
(Drill Bit not included)



Patent No.

US 8292552 B2 / DE 20 2008 015 552 U1
TW M349809 / TW M349810
Patent Pending in Multi-Countries

▼ Steps to use Spot Drill



Step 1

Adjust the steady frame position and point drill bit at the metal plate.



Step 2

Push the enforced lever to have drill bit touch the metal plate easily.



Step 3

Push the throttle lever to start and use enforced lever to move the drill bit forward.

SM-721K

Spot Weld Drill Kit



Kit Includes:

- 1 pc SM-721 Spot Weld Drill
- 3 pcs 8 mm Drill Bit
- 1 pc 6.5 mm Drill Bit
- 1 pc Mini Oiler
- 1 pc 1/4" x 1/4" Swivel Joint
- 1 pc Nipple
- 1 pc Hex. Wrench
- 1 pc Blow Case

SM-721

Spot Weld Drill
- with 8 mm Drill Bit



▲ Optional : 6.5 mm Drill Bit

Specifications:

Model No.	Free Speed (RPM)	Drill Bit Size (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB(A)
SM-71-7802	800	ø 6.3 , ø 8.3 , ø 10.3 x 47 (L)	1/4"	3/8 (10)	4 (113)	13.7 (349)	5.5 (2.5)	84
SM-721	2,000	ø 6.5 , ø 8 x 44 (L)	1/4"	3/8 (10)	4 (113)	9.8 (249)	5.6 (2.5)	84

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Bead Breaker

Features:

- Easy to Use Gain Time Assured
- Intervention Directly on Vehicle
- Handle Exhaust
- Air Regulator

SM-4040

Bead Breaker
- Special Agricultural

- Race Actuator 3.1" (80 mm)
- Opening Jaw 2.7" (68 mm)
- Length 15.6" (396 mm)
- Weight 10.2 lbs (4.6 kg)



📺 *Demonstration on website : <http://www.sunmatch.com/video.html>*



▲ Operation of Bead Breaker



**Easy to use
Gain time assured!**

Specifications:

Model No.	Opening Jaw Inch (mm)	Race Actuator Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-4040	2.7 (68)	3.1 (80)	1/4"	3/8 (10)	4 (113)	15.6 (396)	10.2 (4.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Wheel Bolt Cleaner Kit

Features:

- Free Speed 1,800 R.P.M.
- Cleaning Tool for Rust & Dirt of Heavy Vehicle's Wheel
- For Precise Fastening Torque Control

Improvement in Efficiency with Wheel Bolt Cleaner




📺 **Demonstration on website :**
<http://www.sunmatch.com/video.html>



Driver retainer for quick accessories change



A Part Applies Oil



Please apply the oil to the thread after cleaning

Road trucking vehicle law has been amended in order to avoid the accident by run off the tire.

(Inspection when mounting wheels)

Patent No.

DE 20 2009 006 267 U1
 TW M365294
 JP 3155174
 US 8,032,970 B2
 Patent Pending in Multi-Countries

Wire Brushes

(For Outer Nuts & Inside of Inner Nuts)



Bolt Hole Cleaner



Screw Cleaners

(For Inner Nut, Inner Bolt, Hub Bolt)



Before




• Rust on the Bolt Hole

• Rust & Dirt on the Thread

• Rust & Dirt on the Inner Thread

• Paint on the Thread

After

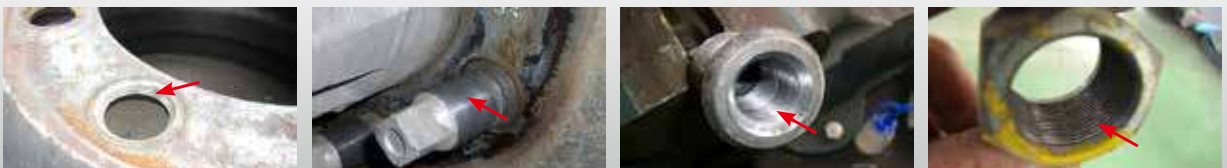

Heavy-Duty Air Drill

Features:

- Free Speed 2,800 RPM
- Gears with Needle Bearings
- **Oil Free** Rotor Blades
- **0.75 HP**

0.75 HP



SM-706L

3/8" Heavy-Duty Air Drill

Specifications :

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)	Horse Power (HP)
SM-706L	2,800	3/8 (10)	1/4"	3/8 (10)	4 (113)	3/8"-24	8 (203)	2.9 (1.3)	0.75

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Heavy-Duty Industrial Pneumatic Drills

Features:

- Dead Handle on Either Side of Motor Housing
- D-type Handle with Inside Trigger

SM-7H-7535
Industrial Air Drill (13 mm)



SM-7H-7538
Industrial Air Drill (16 mm)



SM-7H-7535
with 1/2" (13 mm) Industrial Keyed Chuck



SM-7H-7538
with 5/8" (16 mm) Industrial Keyed Chuck

Specifications:

Model No.	Free Speed (RPM)	Chuck Size Inch (mm)	Spindle Thread	Power (Watt)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-7H-7535	1,200	1/2 (13)	1/2"-20	820W	3/8"	1/2 (13)	5 (142)	14.1 (358)	7.1 (3.2)
SM-7H-7538	800	5/8 (16)	1/2"-20	820W	3/8"	1/2 (13)	5 (142)	14.5 (369)	7.9 (3.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Four Bolt Chipping Hammers

Features:

- Heat Treated Precision Cylinder and Piston for Long Life
- Heavy-duty Hammer Provides Hard-hitting Powerful Blows
- Replaceable Bushing, Hex and Round Types
- Available with Four Different Stroke Lengths, Wide Selection to Suit the Job

SM-DR-100V

1" Chipping Hammer
- Bushing Size: 0.680 Round

SM-DH-100V

1" Chipping Hammer
- Bushing Size: 0.580 Hex



SM-DR-200V

2" Chipping Hammer
- Bushing Size: 0.680 Round

SM-DH-200V

2" Chipping Hammer
- Bushing Size: 0.580 Hex



SM-DR-300V

3" Chipping Hammer
- Bushing Size: 0.680 Round

SM-DH-300V

3" Chipping Hammer
- Bushing Size: 0.580 Hex



SM-DR-400V

4" Chipping Hammer
- Bushing Size: 0.680 Round

SM-DH-400V

4" Chipping Hammer
- Bushing Size: 0.580 Hex



Specifications:

Model No.	Bushing Size (Inch)	Blows Per Minute	Bore Size Inch (mm)	Stroke Length	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-DR-100V	0.680 Round	2,450	1-1/8 (28)	2.5"	3/8"	1/2 (13)	6 (150)	13.6 (345)	16 (7.3)
SM-DH-100V	0.580 Hex	2,450	1-1/8 (28)	2.5"	3/8"	1/2 (13)	6 (150)	13.6 (345)	16 (7.3)
SM-DR-200V	0.680 Round	2,300	1-1/8 (28)	3.0"	3/8"	1/2 (13)	6.5 (165)	14.5 (369)	17 (7.7)
SM-DH-200V	0.580 Hex	2,300	1-1/8 (28)	3.0"	3/8"	1/2 (13)	6.5 (165)	14.5 (369)	17 (7.7)
SM-DR-300V	0.680 Round	2,100	1-1/8 (28)	3.75"	3/8"	1/2 (13)	7.5 (190)	15.6 (397)	18 (8.4)
SM-DH-300V	0.580 Hex	2,100	1-1/8 (28)	3.75"	3/8"	1/2 (13)	7.5 (190)	15.6 (397)	18 (8.4)
SM-DR-400V	0.680 Round	1,700	1-1/8 (28)	4.25"	3/8"	1/2 (13)	8.3 (211)	16.8 (426)	19 (8.9)
SM-DH-400V	0.580 Hex	1,700	1-1/8 (28)	4.25"	3/8"	1/2 (13)	8.3 (211)	16.8 (426)	19 (8.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Large Diameter, Smooth Stroke Piston
- All Shank Sizes Accommodate Standard Steel
- Four-Bolt Head-to-Cylinder Construction
- Efficient Valve Chest for Low-Maintenance
- Replaceable Front Head Bushing
- **Full Control Throttle**
- **Drop-Forged Cylinder**
- Chisel Retainer Latch
- Rubber Handle Grips

SM-P611

Paving Breaker

Shank Size : 1-1/8"x6"

SM-P612

Paving Breaker

Shank Size : 1-1/4"x6"



26.5" (672 mm)

SM-P911

Paving Breaker

Shank Size : 1-1/8"x6"

SM-P912

Paving Breaker

Shank Size : 1-1/4"x6"



29.6" (752 mm)

Specifications :

Model No.	Piston Diameter Inch (mm)	Piston Stroke Inch (mm)	Blow Per Min. (BPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Shank Size Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SM-P611	2-1/4 (57.15)	4 (100)	1,400	3/4"	3/4 (19)	1-1/8x6 (28x152)	70 (2,000)	26.5 (672)	66 (30)
SM-P612	2-1/4 (57.15)	4 (100)	1,400	3/4"	3/4 (19)	1-1/4x6 (32x152)	70 (2,000)	26.5 (672)	66 (30)
SM-P911	2-5/8 (66.67)	6 (152)	1,250	3/4"	3/4 (19)	1-1/8x6 (28x152)	77 (2,200)	29.6 (752)	92.4 (42)
SM-P912	2-5/8 (66.67)	6 (152)	1,250	3/4"	3/4 (19)	1-1/4x6 (32x152)	77 (2,200)	29.6 (752)	92.4 (42)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Air Scribe and Engraving Chisel

Features:

- Provides Sufficient Power for Engraving & Mini Chipping Applications
- High Precision Throttle Ensures Critical Control
- Best for : Precision Engraving of Metals, Stone and Marble

SM-10-1001

Scribe / Engraving Chisel



SM-10-1001K

Scribe / Engraving Chisel Kit



In Blow Molded Case Complete with:

- 1 pc SM-10-1001 Scribe / Engraving Chisel
- 1 pc #100113-11S Air Filter Assembly
- 1 pc #100108-11S Chisel Joint for Use with Chisels
- 1 pc #10-100109 Pen Chisel - Tungsten Carbide Tipped / Writing & Engraving
- 1 pc #10-100110 Chisel A / Customize to Suit
- 1 pc #10-100111 Chisel B / Cutting & Deburring
- 1 pc #10-100112 Chisel C / Scaling & Deburring



#10-100113-11S
Air Filter Assembly



#10-100108-11S
Chisel Joint



#10-100109
Pen Chisel



#10-100110
Chisel A



#10-100111
Chisel B



#10-100112
Chisel C

Specifications :

Model No.	Blows Per Min. (BPM)	Bushing Size Inch (mm)	Bore Size Inch (mm)	Stroke Length Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-10-1001	13,500	1/8" (3.175)	0.228 (5.8)	0.323 (8.2)	1/4"	1/4" (6.35)	1.1 (31)	4.8 (122)	0.3 (0.14)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Wheel Bolt Cleaner Kit

Features:

- Easy to Work with 1/2" Impact Wrenches, Drills or Screwdrivers
- Cleaning Tool for Rust & Dirt of Heavy Vehicle's Wheel
- Multi-Functioned

SM-B4WSA Wheel Bolt Cleaner Kit



**Best at
2,000 RPM**



Wire Brushes

(For Outer Nuts & Inside of Inner Nuts)



B4-20A02-11
Adapter to 1/2" SQ. Dr.
Easy to Work with Impact Wrenches

Screw Cleaners

(For Inner Nut, Inner Bolt, Hub Bolt)



BM-136010
Adapter to Hex. Dr.
Easy to Work with
Screwdrivers & Drills

Spare Brushes (For Screw Cleaners)


BM-136012 For B4-1360
BM-243712 For B4-2437
BM-203712 For B4-2037
BM-306012 For B4-3060
BM-223712 For B4-2237 & B4-2285

Before



• Rust on the Bolt Hole • Rust & Dirt on the Thread • Paint on the Thread • Rust & Dirt on the Inner Thread

After

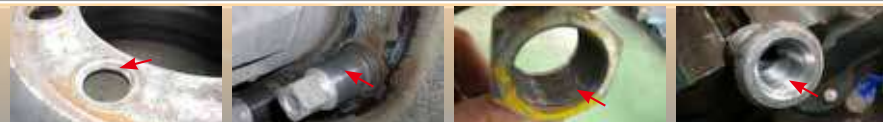

Vibration Impact Wrench Kit

- Replacing a Diesel Glow Plug

SM-40-7500AK

Vibration Impact Wrench Kit

Kit Includes:

- 1 pc SM-40-7500A 1/4" Mini Impact Wrench
- 5 pcs 1/4" Dr. 50 mm Long Socket Set:
8, 9, 10, 11 & 12 mm
- 1 pc Universal 1/4" Joint
- 1 pc Extension Bar : 50 mm
- 1 pc Extension Bar : 100 mm
- 1 pc Blow Molded Case



Torque Controller
#75-750024-11


Operation Instructions:

Select lowest torque to solve glow plugs or other sensitive couplings. Torque settings can be adjusted for this impact wrench in the following 4 steps : **1 = 10 Nm, 2 = 20 Nm, 3 = 30 Nm, 4 = 40 Nm**

Turn the air regulator to lowest position and increase the performance until the nut or bolt moves gradually.

WARNING : if pressing the trigger for longer time and the highest torque level of the torque controller is set, there is a danger that the glow plug breaks off when releasing! Always check the torque with a torque wrench by manufacturer's instructions.

Do not tighten nuts or screws with higher torque than allowed. Put nut or screw in the thread and start attach several revolutions by hand. With the impact wrench tighten the screw until it rests flush against the supporting surface.

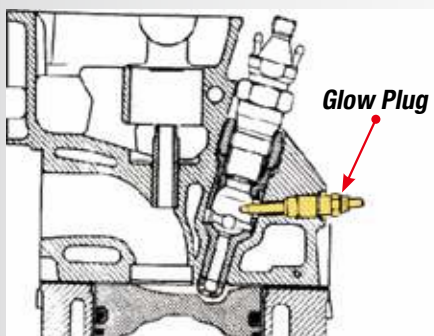

▲ A Glow Plug on a Diesel Engine

Glow Plug Replacement Procedure

1. Remove the valve cover (Ford or if required).
2. Remove what's needed to gain access to the glow plugs.
3. Disconnect the electrical connector and remove the intake manifold plug from the cylinder head.
4. Using a deep socket, remove the glow plug from the cylinder head.
5. Screw the glow plug reamer into the glow plug opening all the way in then out.
6. Install the new glow plug.
7. Reconnect the connector to the glow plug terminal.
8. Replace the valve cover with a new gasket (if required).
9. Reinstall anything removed for glow plug access.

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Torque Setting		Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-40-7500A	10,000	1/4 (6)	Step 1	10 Nm	1/4"	3/8 (10)	4 (113)	6.7 (170)	2.4 (1.1)
			Step 2	20 Nm					
			Step 3	30 Nm					
			Step 4	40 Nm					

* Recommended Max. Air Pressure at 90 PSI (6.2 Bar)

Exhaust Hose Assembly



SM-522SH
1/4" Mini Angle Die Grinder
- with Exhaust Hose Kit



EH-522SUB
Exhaust Hose Assembly (Optional)

▲ For Use on All Series Mini Die Grinders
and SM-6102P Angle Polisher



SM-55-5227SH
1/4" 115° Mini Angle Die Grinder
- with Exhaust Hose Kit



SM-512SH
1/4" Die Grinder (Full Size)
- with Exhaust Hose Kit



EH-512SUB
Exhaust Hose Assembly (Optional)

▲ For Use on All Series Die Grinders
and Straight Screwdrivers



SM-705SH
3/8" Reversible Drill
- with Exhaust Hose Kit



EH-701SUB
Exhaust Hose Assembly (Optional)

▲ For Use on All Series Pistol Grip Drills
and Screwdrivers



SM-5B-6192PSH
4" Angle Grinder
- with Exhaust Hose Kit



EH-6192SUB
Exhaust Hose Assembly (Optional)

▲ For Use on All Series SM-5D-6192P
and SM-5D-6192A Series Tools

Comfort Grips



#82252-108
Comfort Grip

▲ For Use on
SM-751 Series Pistol Grip Drills
SM-822 / SM-8221 Series Pistol Grip
Screwdrivers

SM-751RG



SM-822RG



SM-8221RG



#81352-108
Comfort Grip



#81352-105
Comfort Grip

▲ For Use on
SM-725 Series Pistol Grip Drills
SM-812 Series Pistol Grip Screwdrivers

SM-725RG



SM-812RG



#80253-108
Comfort Grip



#80253-105
Comfort Grip



#80253-103
Comfort Grip

▲ For Use on
SM-701 Series Pistol Grip Drills
SM-802 Series Pistol Grip Screwdrivers
SM-751 Series Pistol Grip Drills
SM-822 Series Pistol Grip Screwdrivers
SM-8221 Series Pistol Grip Screwdrivers

SM-701RG



SM-802RG





SUNTECH
PNEUMATIC TOOLS

SUNTECH

Accessories (Optional)



SA-0101S
Spring Retainer



G-118R
Quick Change Retainer

SM-108

Air Hammer - Vibration Damped

- Shank Opening : 10.2 mm
- Round Shank

SM-108H

Air Hammer - Vibration Damped

- Shank Opening : 10.2 mm
- Hex. Shank

SM-108H1

Air Hammer - Vibration Damped

- Shank Opening : 11.1 mm
- Hex. Shank



Vibration Damped

Features:

- Dual Elastomer Cushions Absorb Shock and Vibration to Reduce User Fatigue
- Direct Multi-Port Front Exhaust Keeps Air and Debris Away from User
- High Grade Steel Barrel Provides Greater Strength
- Hardened Steel Piston Deliver Harder Blows for Maximum Impact



Kit Includes:

- 1 pc SM-108 Air Hammer - Vibration Damped
- 5 pcs Chisel 7"
- 1 pc Quick Change Retainer
- 1 pc Blow Case

SM-108K

Air Hammer Kit - Vibration Damped

- Shank Opening : 10.2 mm
- Round Shank

SM-108HK

Air Hammer Kit - Vibration Damped

- Shank Opening : 10.2 mm
- Hex. Shank

SM-108H1K

Air Hammer Kit - Vibration Damped

- Shank Opening : 11.1 mm
- Hex. Shank

Specifications:

Model No.	Bore Size	Blows Per Minute	Stroke Length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-108	3/4"	2,500	2.9 (73)	0.401 (10.2)	1/4"	5/16 (8)	1.8 (51)	9.1 (232)	5.7 (2.6)
SM-108H	3/4"	2,500	2.9 (73)	0.401 (10.2)	1/4"	5/16 (8)	1.8 (51)	9.1 (232)	5.7 (2.6)
SM-108H1	3/4"	2,500	2.9 (73)	0.437 (11.1)	1/4"	5/16 (8)	1.8 (51)	9.1 (232)	5.7 (2.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Vibro Impact Air Hammer Kit

Features:

- Dual Elastomer Cushions Absorb Shock and Vibration to Reduce User Fatigue
- Direct Multi-Port Front Exhaust Keeps Air and Debris Away from User
- High Grade Steel Barrel Provides Greater Strength
- Hardened Steel Piston Deliver Harder Blows for Maximum Impact

SM-108K2

Vibro Impact Air Hammer Kit

- Shank Opening : 10.2 mm
- Round Shank

Kit Includes:

- 1 pc SM-108 Vibro Impact Air Hammer
- 4 pcs Special Vibro Chisel
- 1 pc Quick Change Retainer
- 1 pc Blow Case



Special Vibro Chisels



CRA-51036
Universal Joint Chisel



CRA-51038
Smoothing Hammer Chisel



CRA-51053
3/8" Drive Air Hammer
Socket Adapter



CRA-51056
1/2" Drive Air Hammer
Socket Adapter

Specifications :

Model No.	Bore Size	Blows Per Minute	Stroke Length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-108	3/4"	2,500	2.9 (73)	0.401 (10.2)	1/4"	5/16 (8)	1.8 (51)	9.1 (232)	5.7 (2.6)

*Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Cylinder: Alloyed Steel, Heat-treated & Honed
- Piston: Alloyed Steel, Heat-treated & Ground
- Air Regulator for Speed Control
- for Heavy Duty Use



SM-103S

Short Barrel Hammer

- Shank Opening : 10.2 mm
- Round Shank

SM-103SH

Short Barrel Hammer

- Shank Opening : 10.2 mm
- Hex. Shank

SM-103SH1

Short Barrel Hammer

- Shank Opening : 11.1 mm
- Hex. Shank



SM-103

Long Barrel Hammer

- Shank Opening : 10.2 mm
- Round Shank

SM-103H

Long Barrel Hammer

- Shank Opening : 10.2 mm
- Hex. Shank

SM-103H1

Long Barrel Hammer

- Shank Opening : 11.1 mm
- Hex. Shank



Speed Control



SM-103K

Long Barrel Hammer Kit

- Shank Opening : 10.2 mm
- Round Shank

SM-103HK

Long Barrel Hammer Kit

- Shank Opening : 10.2 mm
- Hex. Shank

SM-103H1K

Long Barrel Hammer Kit

- Shank Opening : 11.1 mm
- Hex. Shank

Kit Includes:

- 1 pc Long Barrel Hammer
- 5 pcs Chisel 7"
- 1 pc Spring Retainer
- 1 pc Blow Case

Specifications:

Model No.	Blows Per Minute	Bore Size	Stroke length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SM-103	2,600	3/4"	2.9 (73)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	8.3 (211)	4.8 (2.2)
SM-103H	2,600	3/4"	2.9 (73)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	8.3 (211)	4.8 (2.2)
SM-103H1	2,600	3/4"	2.9 (73)	0.437 (11.1)	1/4"	3/8 (10)	4 (113)	8.3 (211)	4.8 (2.2)
SM-103S	3,000	3/4"	2.2 (56)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	6.9 (175)	4.2 (1.9)
SM-103SH	3,000	3/4"	2.2 (56)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	6.9 (175)	4.2 (1.9)
SM-103SH1	3,000	3/4"	2.2 (56)	0.437 (11.1)	1/4"	3/8 (10)	4 (113)	6.9 (175)	4.2 (1.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Chipping Hammer

Features:

- Easy to Handle - Good Weight Balance
- Least Vibration at Handle to Reduce Fatigue
- Precision Spool Valve Design System to Ensure Maximum Power Against Light Body Weight

SM-TH-1830
Air Chipping Hammer
- Hex. Shank



Vibration Damped


Accessories (Optional)



G-118R
Quick Change Retainer

Accessories (Optional)

- Chisel Length : 7" (180 mm)



#H1118006-11
Tail Pipe Cutter



#H1118013-11
Double Edge Cutter



#H1118002-11
Flat Chisel



#H1118003-11
Spot Weld Bracket



#H1118025-11
Shred Metal Trimmer

Specifications:

Model No.	Bore Size	Blows Per Minute	Stroke Length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-TH-1830	18 mm	5,000	1.2 (30)	0.437 (11.1)	1/4"	3/8 (10)	3 (85)	7.7 (196)	5.1 (2.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Accessories (Optional)



G-102
Quick Change Retainer

SM-0101R

Short Air Hammer
- Round Shank



SM-0101H

Short Air Hammer
- Hex. Shank

SG-0102R

135mm Air Hammer
- Round Shank



SG-0102H

135mm Air Hammer
- Hex. Shank

SM-0204R

Medium Air Hammer
- Round Shank



SM-0204H

Medium Air Hammer
- Hex. Shank

SM-0304R

Long Air Hammer
- Round Shank



SM-0304H

Long Air Hammer
- Hex. Shank

SM-0204PSR / SM-0204PSH

Medium Air Hammer Kit



In Blow Molded Case Complete with:

- 1 pc Medium Air Hammer
- 5 pcs Chisel 5"
- 1 pc Oiler (Optional)
- 1 pc Blow Case

SM-0304PSR / SM-0304PSH

Long Air Hammer Kit



In Blow Molded Case Complete with:

- 1 pc Long Air Hammer
- 5 pcs Long Chisels 7"
- 1 pc Oiler (Optional)
- 1 pc Blow Case

Specifications :

Model No.	Bore Size	Blows Per Minute (BPM)	Stroke length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SM-0101R	3/4"	5,000	1.6 (41)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	5.7 (145)	3 (1.4)
SM-0101H	3/4"	5,000	1.6 (41)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	5.7 (145)	3 (1.4)
SG-0102R	3/4"	4,500	1.6 (41)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	5.8 (148)	3.3 (1.5)
SG-0102H	3/4"	4,500	1.6 (41)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	5.8 (148)	3.3 (1.5)
SM-0204R	3/4"	4,000	2.6 (67)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	7.4 (187)	3.5 (1.6)
SM-0204H	3/4"	4,000	2.6 (67)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	7.4 (187)	3.5 (1.6)
SM-0304R	3/4"	3,600	3.5 (89)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	8 (202)	4 (1.9)
SM-0304H	3/4"	3,600	3.5 (89)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	8 (202)	4 (1.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Hammers & Kits

SM-2711R

Heavy Duty Medium Hammer
- Round Shank



SM-2711H

Heavy Duty Medium Hammer
- Hex. Shank

SM-2715R

Heavy Duty Long Hammer
- Round Shank



SM-2715H

Heavy Duty Long Hammer
- Hex. Shank

SG-0218-2X

Riveting Hammer

SG-0218-3X

Riveting Hammer

SG-0218-4X

Riveting Hammer



SG-0218-5X

Riveting Hammer

SG-0218-7X

Riveting Hammer

SG-0218-9X

Riveting Hammer



SM-2711PSR / SM-2711PSH

Heavy Duty Medium Hammer Kit



In Blow Molded Case Complete with:

- 1 pc Heavy Duty Medium Hammer
- 5 pcs Chisel 7"
- 1 pc Oiler (Optional)
- 1 pc Blow Case

SM-2715PSR / SM-2715PSH

Heavy Duty Long Hammer Kit



In Blow Molded Case Complete with:

- 1 pc Heavy Duty Long Hammer
- 5 pcs Chisel 7"
- 1 pc Oiler (Optional)
- 1 pc Blow Case

Specifications:

Model No.	Bore Size	Blows Per Minute (BPM)	Stroke Length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SM-2711R	3/4"	4,000	2.2 (57)	0.401 (10.2)	1/4"	3/8 (10)	2.6 (73.6)	7.2 (184)	3.5 (1.6)
SM-2711H	3/4"	4,000	2.2 (57)	0.401 (10.2)	1/4"	3/8 (10)	2.6 (73.6)	7.2 (184)	3.5 (1.6)
SM-2715R	3/4"	3,000	3.4 (87)	0.401 (10.2)	1/4"	3/8 (10)	2.8 (79.2)	9.2 (233)	4.2 (1.9)
SM-2715H	3/4"	3,000	3.4 (87)	0.401 (10.2)	1/4"	3/8 (10)	2.8 (79.2)	9.2 (233)	4.2 (1.9)
SG-0218-2X	1/2"	2,580	2.2 (57)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	6 (152)	2.7 (1.2)
SG-0218-3X	1/2"	2,160	2.9 (73)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	6.9 (175)	2.9 (1.3)
SG-0218-4X	1/2"	2,300	3.1 (78)	0.401 (10.2)	1/4"	3/8 (10)	4 (113)	7.7 (196)	3.1 (1.4)
SG-0218-5X	3/4"	1,600	2.7 (68)	0.498 (12.6)	1/4"	3/8 (10)	6 (170)	8.1 (205)	4.8 (2.2)
SG-0218-7X	3/4"	1,140	3.9 (98)	0.498 (12.6)	1/4"	3/8 (10)	6 (170)	10.2 (258)	5.1 (2.3)
SG-0218-9X	3/4"	900	5.8 (148)	0.498 (12.6)	1/4"	3/8 (10)	6 (170)	11.1 (282)	5.7 (2.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Hammers

SM-102

Short Air Hammer
- Hex. Shank



SG-0123R

Mini Chipping Hammer
- Round Shank



(SG-0123H - Hex. Shank)

SG-0122R-1

1" Chipping Hammer
- Round Shank

(SG-0122H-1 - Hex. Shank : 0.580")

SG-0122R-3

3" Chipping Hammer
- Round Shank

(SG-0122H-3 - Hex. Shank : 0.580")

SG-0122R-2

2" Chipping Hammer
- Round Shank

(SG-0122H-2 - Hex. Shank : 0.580")

SG-0122R-4

4" Chipping Hammer
- Round Shank

(SG-0122H-4 - Hex. Shank : 0.580")



Specifications:

Model No.	Bore Size	Blows Per Minute (BPM)	Stroke length Inch (mm)	Shank Opening Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SM-102	3/4"	5,000	1.6 (41)	0.437 (11.1)	1/4"	3/8 (10)	4 (113)	6.7 (169)	3.4 (1.5)
SG-0123R	25/32"	3,000	1.5 (38)	0.551 (14)	1/4"	3/8 (10)	4 (113)	10.9 (277)	5.1 (2.3)
SG-0122R-1	1-1/8"	2,100	1 (25.4)	0.680 (17.3)	3/8"	1/2 (12.7)	6 (170)	12.5 (318)	14.5 (6.6)
SG-0122R-2	1-1/8"	1,900	2 (50)	0.680 (17.3)	3/8"	1/2 (12.7)	7 (198)	13.3 (337)	15.2 (6.9)
SG-0122R-3	1-1/8"	1,700	3 (75)	0.680 (17.3)	3/8"	1/2 (12.7)	8 (226)	15.3 (388)	16 (7.3)
SG-0122R-4	1-1/8"	1,400	3.9 (100)	0.680 (17.3)	3/8"	1/2 (12.7)	8 (226)	16.5 (420)	18 (8.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Flux Chipper


SM-104

Flux Chipper
(Chisel not Included)



• Shank Size : 0.43" (10.9 mm)

Accessories (Optional)

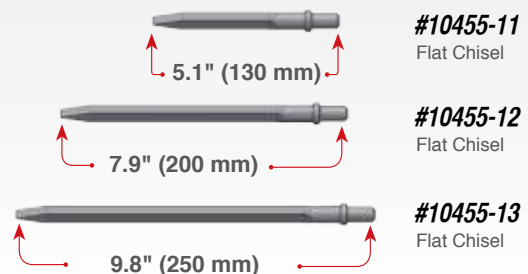

Specifications:

Model No.	Blows Per Min. (BPM)	Piston Size Dia Inch (mm)	Stroke Length Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-104	5,400	3/4 (20)	0.75 (19)	1/4"	3/8 (10)	1 (28.33)	6.9 (174)	1.78 (0.8)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Needle Scalers & Flux Chippers


SG-0315

Flux Chipper



SG-0315NS

Needle Scaler



SG-2288

Flux Chipper



SG-2288NS

Needle Scaler



SG-9121

Flux Chipper



SG-9121NS

Needle Scaler




SG-2280

Needle Scaler



SG-2100NS

Needle Scaler




SG-2110NS

Needle Scaler



SG-2111NS

Needle Scaler

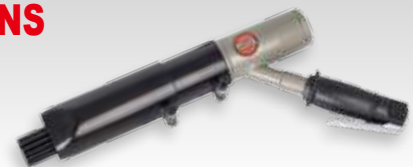

Specifications:

Model No.	Blows Per Min. (BPM)	Needle Dia. (mm)	Needle Per Tool (Pc)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SG-0315	5,000	-	-	1/4"	3/8 (10)	7 (198)	13.1 (334)	4 (1.8)
SG-0315NS	4,600	3	19	1/4"	3/8 (10)	6 (170)	16.3 (414)	6 (2.7)
SG-2288	4,800	-	-	1/4"	3/8 (10)	2 (57)	8.5 (217)	2.4 (1.1)
SG-2288NS	5,000	3	12	1/4"	3/8 (10)	1.7 (48)	11.5 (291)	2.9 (1.3)
SG-9121	4,800	-	-	1/4"	3/8 (10)	8.5 (241)	14.2 (362)	4.6 (2.1)
SG-9121NS	4,600	3	19	1/4"	3/8 (10)	8.2 (232)	18 (458)	6.2 (2.8)
SG-2280	3,500	3 or 4	28 or 14	3/8"	3/8 (10)	7.4 (210)	13.3 (337)	7.9 (3.6)
SG-2100NS	3,700	2 or 3	29 or 19	1/4"	3/8 (10)	3 (85)	14.6 (370)	6.2 (2.8)
SG-2110NS	3,700	3	19	1/4"	3/8 (10)	3 (85)	13 (331)	6 (2.7)
SG-2111NS	2,500	3 or 4	49 or 35	1/4"	3/8 (10)	7.4 (210)	18 (457)	13.2 (6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Needle Scaler & Scaling Hammer

SG-0204RNS

Needle Scaler



SG-2200

Scaling Hammer



Specifications:

Model No.	Blows Per Min. (BPM)	Needle Dia. (mm)	Needle Per Tool (Pc)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
SG-0204RNS	3,200	3	19	1/4"	3/8 (10)	4 (113)	15.7 (400)	4.2 (2.2)
SG-2200	7,000	-	-	1/4"	3/8 (10)	4 (113)	22.3 (566)	4.8 (1.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Ratchet Wrenches

SM-30

3/8" Ratchet Wrench

SM-31

1/2" Ratchet Wrench



SM-33-3100

3/8" Stubby Ratchet Wrench



SM-32-3100

1/4" Stubby Ratchet Wrench



SG-0735

1/2" Heavy Duty Ratchet Wrench



Specifications:

Model No.	Free Speed (RPM)	Torque (Ft-lbs)	Square Drive	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-30	200	50	3/8"	1/4"	3/8 (10)	4 (113)	10.4 (265)	2.5 (1.1)
SM-31	200	50	1/2"	1/4"	3/8 (10)	4 (113)	10.4 (265)	2.5 (1.1)
SM-33-3100	300	30	3/8"	1/4"	1/4 (6)	2.5 (62)	6.6 (168)	1.1 (0.5)
SM-32-3100	300	30	1/4"	1/4"	1/4 (6)	2.5 (62)	6.6 (168)	1.1 (0.5)
SG-0735	150	90	1/2"	1/4"	3/8 (10)	5 (142)	14.4 (365)	4.4 (2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Ratchet Wrenches Kit

SM-31K

1/2" Ratchet Wrench Kit



In Blow Molded Case Complete with:

- 1 pc SM-31 1/2" Ratchet Wrench
- 7 pcs Sockets : 9, 11, 12, 13, 14, 17, 19 mm
- 1 pc 3" Extension Bar
- 1 pc Universal Joint
- 1 pc Screwdriver Extension Bar
- 3 pcs Screwdriver Bit
- 1 pc Blow Case

Impact Wrenches & Kit

SG-0775

3/8" Impact Wrench

▶ Single Hammer



SM-401

3/8" Butterfly Impact Wrench

▶ Single Hammer



SM-401A

3/8" Butterfly Impact Wrench

SM-4011A

1/2" Butterfly Impact Wrench



◀ with Grip

◀ Heavy-Duty

◀ Single Hammer

SM-401AK

3/8" Butterfly Impact Wrench Kit



In Blow Molded Case Complete with:

- 1 pc SM-401A 3/8" Butterfly Impact Wrench
- 7 pcs Socket : 8, 10, 11, 12, 13, 14, 17 & 19 mm
- 1 pc 3" Extension Bar
- 1 pc Bit Holder
- 1 pc Blow Mold Case

Specifications:

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0775	10,000	3/8 (10)	75 (101)	5~50 (7~68)	1/4"	3/8 (10)	3 (85)	5.3 (135)	2 (0.9)
SM-401	12,000	3/8 (10)	75 (101)	5~50 (7~68)	1/4"	3/8 (10)	3 (85)	5.9 (150)	2 (0.9)
SM-401A	10,000	3/8 (10)	75 (101)	5~50 (7~68)	1/4"	3/8 (10)	3 (85)	5.9 (150)	2 (0.9)
SM-4011A	10,000	1/2 (13)	75 (101)	5~50 (7~68)	1/4"	3/8 (10)	3 (85)	6.1 (156)	2 (0.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Impact Wrenches & Kit

SG-0717
1/2" Impact Wrench



SG-0717L
1/2" Impact Wrench
- with 2" Ext. Anvil

► Pin Clutch

SM-403
1/2" Impact Wrench



SM-403L
1/2" Impact Wrench
- with 2" Ext. Anvil

► Single Hammer

SG-0716
1/2" Impact Wrench



SG-0716L
1/2" Impact Wrench
- with 2" Ext. Anvil

► Pin Clutch

SG-0740
3/4" Impact Wrench



SG-0740L
3/4" Impact Wrench
- with 6" Ext. Anvil

► Single Hammer

SG-0750
3/4" Impact Wrench



SG-0750L
3/4" Impact Wrench
- with 6" Ext. Anvil

► Pin Clutch

SG-0751
3/4" Impact Wrench



SG-0751L
3/4" Impact Wrench
- with 6" Ext. Anvil

► Pin Clutch

SM-403K-17
1/2" Impact Wrench W/Socket Set



In Blow Molded Case Complete with:

- 1 pc SM-403 1/2" Impact Wrench
- 10 pcs Sockets : 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm
- 1 pc 5" Extension Bar
- 1 pc Oil Pot
- 1 pc Mini Oiler
- 1 pc Hex. Wrench
- 1 pc Nipple
- 1 pc Blow Case

Specifications:

Model No.	Bolt Capacity	Free Speed (RPM)	Maximum Torque Ft-lbs (Nm)	Square Drive	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0717	5/8"	7,000	380 (513)	1/2"	1/4"	3/8 (10)	4.2 (119)	7.5 (191)	5.7 (2.6)
SG-0717L	5/8"	7,000	380 (513)	1/2"	1/4"	3/8 (10)	4.2 (119)	9.5 (241)	6.9 (3.1)
SM-403	5/8"	8,000	250 (339)	1/2"	1/4"	3/8 (10)	4 (113)	7.2 (182)	5.25 (2.4)
SM-403L	5/8"	8,000	250 (339)	1/2"	1/4"	3/8 (10)	4 (113)	8.3 (210)	6.25 (2.8)
SG-0716	5/8"	7,000	280 (378)	1/2"	1/4"	3/8 (10)	4 (113)	7.2 (184)	5.25 (2.4)
SG-0716L	5/8"	7,000	280 (378)	1/2"	1/4"	3/8 (10)	4 (113)	9.3 (235)	6.25 (2.8)
SG-0740	7/8"	4,500	500 (675)	3/4"	1/4"	3/8 (10)	7 (198)	9.6 (245)	10.6 (4.8)
SG-0740L	7/8"	4,500	500 (675)	3/4"	1/4"	3/8 (10)	7 (198)	15.5 (394)	11.6 (5.3)
SG-0750	1"	4,200	700 (945)	3/4"	1/4"	3/8 (10)	7 (198)	9.5 (241)	10.6 (4.8)
SG-0750L	1"	4,200	700 (945)	3/4"	1/4"	3/8 (10)	7 (198)	15.5 (394)	11.6 (5.3)
SG-0751	1"	4,800	700 (945)	3/4"	1/4"	3/8 (10)	7 (198)	9.8 (248)	11 (5)
SG-0751L	1"	4,800	700 (945)	3/4"	1/4"	3/8 (10)	7 (198)	15.7 (400)	11.6 (5.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Impact Wrenches

SG-0704S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0704L

1" Impact Wrench
- with 6" Ext. Anvil




▲ Twin Hammer

SG-0705S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0705L

1" Impact Wrench
- with 6" Ext. Anvil

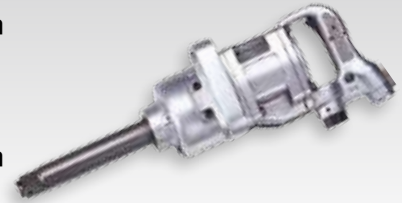


▲ Rocking Dog

SG-0706S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0706L

1" Impact Wrench
- with 6" Ext. Anvil




▲ Twin Hammer

SG-0707S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0707L

1" Impact Wrench
- with 6" Ext. Anvil




▲ Rocking Dog

SG-0708S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0708L

1" Impact Wrench
- with 6" Ext. Anvil



▲ Rocking Dog

SG-0709S

1" Impact Wrench
- with 2" Ext. Anvil

SG-0709L

1" Impact Wrench
- with 6" Ext. Anvil



▲ Rocking Dog

Specifications:

Model No.	Bolt Capacity	Free Speed (RPM)	Maximum Torque Ft-lbs (Nm)	Square Drive	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0704S	1-3/4"	3,500	1,800 (2,430)	1"	1/2"	1/2 (13)	12 (340)	17 (432)	24.25 (11.1)
SG-0704L	1-3/4"	3,500	1,800 (2,430)	1"	1/2"	1/2 (13)	12 (340)	22.9 (581)	24.2 (11)
SG-0705S	1-1/2"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	11.9 (302)	26.6 (12)
SG-0705L	1-1/2"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	16.9 (429)	27.1 (12.3)
SG-0706S	1-3/4"	3,500	1,800 (2,430)	1"	1/2"	1/2 (13)	12 (340)	11.9 (302)	19.8 (9)
SG-0706L	1-3/4"	3,500	1,800 (2,430)	1"	1/2"	1/2 (13)	12 (340)	16.9 (429)	22.2 (10)
SG-0707S	1-1/2"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	11.9 (302)	24.25 (11)
SG-0707L	1-1/2"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	22.9 (581)	28.4 (13)
SG-0708S	1-1/4"	4,000	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	14.2 (361)	22.5 (10)
SG-0708L	1-1/4"	4,000	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	19.2 (488)	23.5 (10.7)
SG-0709S	1-1/4"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	11.1 (282)	20.5 (9.3)
SG-0709L	1-1/4"	3,500	1,200 (1,620)	1"	1/2"	1/2 (13)	12 (340)	15.6 (397)	21.5 (9.8)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Impact Wrenches

SM-43-231F

- 1/2" Impact Wrench
- Twin Hammer
- Front Exhaust



SM-43-231FRG

- 1/2" Impact Wrench
- Twin Hammer
- Front Exhaust
- with Handle Grip



SM-43-231H

- 1/2" Impact Wrench
- Twin Hammer
- Handle Exhaust



SM-43-231HL

- 1/2" Impact Wrench
- Twin Hammer
- Handle Exhaust
- with 2" Ext. Anvil



SM-43-231HRG

- 1/2" Impact Wrench
- Twin Hammer
- Handle Exhaust
- with Handle Grip



SM-43-231HRGK3

- 1/2" Impact Wrench Kit



Kit Includes:

- 1 pc SM-43-231HRG 1/2" Impact Wrench - Twin Hammer
- 10 pcs Sockets set
incl : 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm
- 1 pc Extension Bar
- 1 pc Universal Joint
- 1 pc Nipple
- 1 pc Blow Molded Case

SM-43-4137

- 1/2" Impact Wrench
- Twin Hammer
- Handle Exhaust



Air Regulator

(4 Different Speeds of Forward / Reverse)

Specifications :

Model No.	Free Speed (RPM)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFM (L/Min)	Square Drive Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)
SM-43-231F	9000	680 (922)	25~400 (34~542)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	7.3 (185)	5.8 (2.63)
SM-43-231FRG	9000	680 (922)	25~400 (34~542)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	7.3 (185)	5.8 (2.63)
SM-43-231H	8000	680 (922)	25~400 (34~542)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	7.3 (185)	5.8 (2.63)
SM-43-231HL	8000	680 (922)	25~400 (34~542)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	9.3 (237)	6 (2.7)
SM-43-231HRG	8000	680 (922)	25~400 (34~542)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	7.3 (185)	5.8 (2.63)
SM-43-4137	8000	820 (1,112)	25~580 (34~787)	1/4"	3/8 (10)	4.2 (119)	1/2"(12.7)	8.1 (205)	6.6 (2.98)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-701

3/8" Air Drill (2,200 RPM)
- 2-Gears Type



SM-748

3/8" Air Drill (4,800 RPM)
- Full-Cage Gear Design



SM-705

3/8" Reversible Air Drill (2,000 RPM)



SM-706

3/8" Air Drill (2,600 RPM)
- 3-Gear Type



SM-703

1/2" Air Drill (500 RPM)



SM-704

1/2" Reversible Air Drill (800 RPM)




SM-734

1/2" Reversible Air Drill (400 RPM)



SM-709

3/8" Angle Drill (1,900 RPM)



SM-709R

3/8" Reversible Angle Drill (1,600 RPM)



Specifications:

Model No.	Free Speed (RPM)	Chuck Size	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)
SM-701	2,200	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.1 (180)	2.5 (1.1)
SM-748	4,800	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.1 (180)	2.5 (1.1)
SM-705	2,000	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.2 (183)	2.5 (1.1)
SM-706	2,600	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.2 (183)	2.5 (1.1)
SM-703	500	1/2"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.9 (225)	3.3 (1.5)
SM-704	800	1/2"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.3 (210)	3.1 (1.4)
SM-734	400	1/2"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.7 (222)	3.6 (1.6)
SM-709	1,900	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.6 (193)	2 (0.9)
SM-709R	1,600	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.1 (205)	2.5 (1.1)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-728

1/4" Mini Air Drill (2,800 RPM)
- Full-Cage Gear Design



SM-720

3/8" Air Drill (2,600 RPM)
- Full-Cage Gear Design



SM-725

3/8" Reversible Drill (1,800 RPM)



SM-724

1/2" Reversible Drill (800 RPM)



SM-702

3/8" Air Drill (2,000 RPM)
- Full-Cage Gear Design



SM-712

1/2" Air Drill (400 RPM)
- Full-Cage Gear Design




SM-502

3/8" High Speed Drill (22,000 RPM)




SM-710

3/8" Straight Air Drill (2,600 RPM)



SM-746

3/8" Straight Air Drill (4,500 RPM)
- Full-Cage Gear Design



Specifications:

Model No.	Free Speed (RPM)	Chuck Size	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Spindle Thread	Length Inch (mm)	Weight Lbs (Kg)
SM-728	2,800	1/4"	1/4"	3/8 (10)	4 (113)	3/8"-24	5.2 (132)	1.3 (0.6)
SM-720	2,600	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.9 (200)	2.6 (1.2)
SM-725	1,800	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.3 (186)	2.5 (1.1)
SM-724	800	1/2"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.3 (210)	3 (1.4)
SM-702	2,000	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	6.9 (175)	2.6 (1.2)
SM-712	400	1/2"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.4 (214)	3.5 (1.6)
SM-502	22,000	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	7.8 (198)	1.7 (0.8)
SM-710	2,600	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.3 (210)	2 (0.9)
SM-746	4,500	3/8"	1/4"	3/8 (10)	4 (113)	3/8"-24	8.1 (206)	2 (0.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Screwdrivers & Kit

SM-802

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-803

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-8020

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-806

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-832

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-833

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-802K

Air Screwdriver Kit



Kit Includes:

- 1 pc SM-802 1/4" Air Screwdriver
 - 7 pcs Bits
 - 1 pc Hex. Wrench
 - 1 pc Wrench
- Packed in a Carton Box.

Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-802	1,800	1/4	30-70 (3-8)	1/4"	3/8 (10)	4 (113)	8.1 (205)	2.4 (1.1)
SM-803	800	1/4	30-95 (3-11)	1/4"	3/8 (10)	4 (113)	8.9 (225)	2.9 (1.3)
SM-84-8020	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.6 (192)	2.6 (1.2)
SM-806	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	8 (203)	2.6 (1.2)
SM-832	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	8.1 (205)	2.5 (1.1)
SM-833	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	8.8 (223)	2.9 (1.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-812

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-813

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-84-8140

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-816

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SM-820

1/4" Air Screwdriver (2,000 RPM)
- Positive Clutch



SM-852

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch



SM-853

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-812	1,800	1/4	30-70 (3-8)	1/4"	3/8 (10)	4 (113)	8.3 (211)	2.6 (1.2)
SM-813	800	1/4	30-95 (3-11)	1/4"	3/8 (10)	4 (113)	9 (228)	2.9 (1.3)
SM-84-8140	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	7.6 (194)	2.6 (1.2)
SM-816	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	8.3 (212)	2.6 (1.2)
SM-820	2,000	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	8 (203)	2.6 (1.2)
SM-852	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	8 (204)	2.5 (1.1)
SM-853	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	8.7 (222)	2.9 (1.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Straight Air Screwdrivers

SM-842

1/4" Air Screwdriver (1,800 RPM)
- Adjustable Clutch



SM-843

1/4" Air Screwdriver (800 RPM)
- Adjustable Clutch



SM-844

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch




SM-846

1/4" Air Screwdriver (800 RPM)
- Positive Clutch




SM-862

1/4" Air Screwdriver (1,800 RPM)
- Positive Clutch

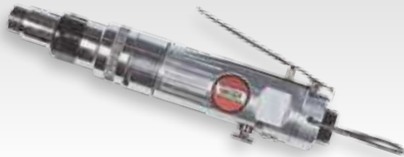

SM-863

1/4" Air Screwdriver (800 RPM)
- Positive Clutch



SG-0905

1/4" Air Screwdriver (8,000 RPM)
- Impact Type Clutch



SG-0909

1/4" Air Screwdriver (1,500 RPM)
- Adjustable Clutch



Specifications:

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-842	1,800	1/4	30-70 (3-8)	1/4"	3/8 (10)	4 (113)	9.5 (242)	2.5 (1.1)
SM-843	800	1/4	30-95 (3-11)	1/4"	3/8 (10)	4 (113)	10.2 (260)	2.6 (1.2)
SM-844	1,800	1/4	115 (13)	1/4"	3/8 (10)	4 (113)	9.1 (230)	2.5 (1.1)
SM-846	800	1/4	145 (16)	1/4"	3/8 (10)	4 (113)	9.3 (236)	2.6 (1.2)
SM-862	1,800	1/4	45-115 (5-13)	1/4"	3/8 (10)	4 (113)	9.4 (240)	2.5 (1.1)
SM-863	800	1/4	45-145 (5-16)	1/4"	3/8 (10)	4 (113)	10.2 (258)	2.6 (1.2)
SG-0905	8,000	1/4	20-60 (2-7)	1/4"	3/8 (10)	4 (113)	7 (177)	1.5 (0.7)
SG-0909	1,500	1/4	10-30 (1-3)	1/4"	3/8 (10)	4 (113)	9.1 (231)	1.33 (0.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Air Screwdrivers

SM-872

1/4" Straight Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



SM-873

1/4" Straight Air Screwdriver (800 RPM)
- External Adjustable Clutch



SM-882

1/4" Air Screwdriver (1,800 RPM)
- External Adjustable Clutch



SM-883

1/4" Air Screwdriver (800 RPM)
- External Adjustable Clutch



Specifications:


Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Torque In-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-872	1,800	1/4	45-115 (5-13)	1/4"	3/8 (10)	4 (113)	10.6 (268)	3 (1.4)
SM-873	800	1/4	45-145 (5-16)	1/4"	3/8 (10)	4 (113)	11.3 (288)	3.3 (1.5)
SM-882	1,800	1/4	45-115 (5-13)	1/4"	3/8 (10)	4 (113)	9.2 (234)	3 (1.4)
SM-883	800	1/4	45-145 (5-16)	1/4"	3/8 (10)	4 (113)	9.9 (252)	3.3 (1.5)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Stripping Tool & Tire Buffers


SM-645

Stripping Tool
- Full-Cage Gear Design




SM-661

Tire Buffer



SM-662

Tire Buffer



SM-747

Tire Buffer
- Full-Cage Gear Design



Specifications:

Model No.	Free Speed (RPM)	Pad Size (Inch)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-645	4,000	3-1/2"	1/4"	3/8 (10)	3 (85)	8.5 (217)	1.7 (0.8)
SM-661	2,600	-	1/4"	3/8 (10)	4 (113)	9.3 (237)	1.25 (0.5)
SM-662	2,600	-	1/4"	3/8 (10)	4 (113)	8.2 (208)	2 (0.9)
SM-747	4,500	-	1/4"	3/8 (10)	4 (113)	33 (838)	2.6 (1.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Family Looking Tools

SM-582

1/4" Die Grinder - Full Size



SM-582F

1/4" Extended Die Grinder



SM-585

1/4" Die Grinder



▲ Full-Cage Gear Design

SM-681

Air Tire Buffer



▲ 3-Gear Type

SM-682

Air Tire Buffer



SM-683

Air Tire Buffer



▲ Full-Cage Gear Design

SM-580

3/8" High Speed Straight Air Drill



SM-780

3/8" Straight Air Drill



SM-781

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-786

3/8" Straight Air Drill



▲ Full-Cage Gear Design

SM-284S


Straight Air Shear



▲ Cutting Capacity Steel 1.2mm

SM-586

3" Cut-Off Tool



▲ Cutting Wheel : 3"

SM-586A

3" Cut-Off Tool



▲ Swivel Guard
▲ Cutting Wheel : 3"

Specifications:

Model No.	Free Speed (RPM)	Collet (or Chuck) Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-582	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6.7 (171)	1.3 (0.6)
SM-582F	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13 (330)	2.2 (1.0)
SM-585	4,500	1/4 (6)	1/4"	3/8 (10)	4 (113)	8.1 (206)	1.8 (0.8)
SM-681	2,600	-	1/4"	3/8 (10)	4 (113)	9.5 (241)	2.2 (1.0)
SM-682	2,600	-	1/4"	3/8 (10)	4 (113)	8.3 (210)	2.1 (0.95)
SM-683	2,600	-	1/4"	3/8 (10)	4 (113)	9.3 (235)	2.2 (1.0)
SM-580	22,000	3/8 (10)	1/4"	3/8 (10)	4 (113)	7.9 (200)	1.8 (0.8)
SM-780	2,600	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.7 (222)	2.0 (0.9)
SM-781	2,600	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.1 (205)	2.0 (0.9)
SM-786	4,500	3/8 (10)	1/4"	3/8 (10)	4 (113)	8.3 (210)	2.0 (0.9)
SM-284S	2,800	-	1/4"	3/8 (10)	4 (113)	10 (254)	2.5 (1.1)
SM-586	22,000	-	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.8 (0.8)
SM-586A	22,000	-	1/4"	3/8 (10)	4 (113)	7.5 (191)	1.8 (0.8)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-512
1/4" Die Grinder



SM-512S
1/4" Die Grinder



SM-512SC8
8 mm Die Grinder



SM-532
1/4" Mini Die Grinder



SM-512K
1/4" Die Grinder Kit



Kit Includes:

- 1 pc SM-512 1/4" Die Grinder
- 1 pc 1/4"(6mm) Collet installed
- 1 pc Extra 1/8"(3mm) Collet
- 10 pcs Mounted Wheels
- 1 pc Blow Case

SM-532K
1/4" Mini Die Grinder Kit




Kit Includes:

- 1 pc SM-532 1/4" Mini Die Grinder
- 1 pc 1/4"(6mm) Collet installed
- 1 pc Extra 1/8"(3mm) Collet
- 10 pcs Mounted Wheels
- 1 pc Blow Case

SM-512F
1/4" Extended Die Grinder



SM-532E
1/4" Extended Mini Die Grinder



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-512	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6.8 (172)	1.3 (0.6)
SM-512S	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6.8 (172)	1.3 (0.6)
SM-512SC8	23,000	8 mm	1/4"	3/8 (10)	4 (113)	6.8 (172)	1.3 (0.6)
SM-532	25,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6 (153)	0.8 (0.4)
SM-512F	23,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	13.2 (335)	2.6 (1.2)
SM-532E	25,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	9.7 (246)	1.3 (0.6)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Die Grinders & Cut-Off Tool

SM-522

1/4" Angle Die Grinder



SM-545

1/4" Hand Die Grinder



SM-562S

1/4" Mini Angle Die Grinder
- Front Exhaust



SM-552S


1/4" Mini Die Grinder
- Front Exhaust



▲ Full-Cage Gear Design

SM-542

1/4" Heavy Duty Mini Angle Die Grinder



SM-501C

1/4" Die Grinder
- Front Exhaust



SM-526

Cut-Off Tool
- Metal Guard



Features:

- **Compact, Lightweight Design**
- 90° Head for **Flexibility in Tight Spaces**
- For High-Speed Blending, Smoothing, Porting and Deburring
- 1/4" (6 mm) Collet

SM-562K

1/4" Mini Die Grinder Kit



Kit Includes:

- 1 pc SM-562 1/4" Mini Angle Die Grinder
- 1 pc 1/4" Collet (Installed)
- 1 pc 6 mm Collet
- 2 pcs 52227-11SUB Spanner Wrench
- 1 pc 2" Backing Pad (1/4"-20 Thread)
- 2 pcs 2" Coarse Surface Prep Pads
- 2 pcs 2" Med Surface Prep Pads
- 2 pcs 2" Fine Surface Prep Pads
- 2 pcs 2" #24 Grit Sanding Discs
- 2 pcs 2" #36 Grit Sanding Discs
- 2 pcs 2" #50 Grit Sanding Discs
- 1 pc Blow Case

Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-522	22,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6.1 (155)	1.1 (0.5)
SM-545	4,500	1/4 (6)	1/4"	3/8 (10)	4 (113)	8 (203)	1.4 (0.6)
SM-562S	22,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	5 (126)	1 (0.4)
SM-552S	25,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	4.8 (121)	0.6 (0.3)
SM-542	20,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	5.2 (133)	1.1 (0.5)
SM-501C	22,000	1/4 (6)	1/4"	3/8 (10)	4 (113)	6.9 (174)	1.1 (0.5)
SM-526	22,000	-	1/4"	3/8 (10)	4 (113)	7.4 (188)	1.8 (0.8)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Features:

- Lightweight for Easy Operation
- Piston Operation for Trouble Free Use
- Simple on/off Power
- Will Write on Materials up to 60Rc Hardness

SG-0573

Engraving Tool (3,800 BPM)
- Steel Housing



SG-0574

Engraving Tool (3,400 BPM)
- Plastic Housing



SG-0575

Engraving Tool (13,000 BPM)
- Steel Housing



Specifications:

Model No.	Blows Per Min. (BPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Hose Length Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)
SG-0573	3,800	1/4"	1/4 (6)	2 (57)	59 (1,500)	6.7 (171)	0.4 (0.2)
SG-0574	3,400	1/4"	1/4 (6)	2 (57)	59 (1,500)	6.7 (171)	0.4 (0.2)
SG-0575	13,000	1/4"	1/4 (6)	1.1 (31)	58 (1,480)	6.3 (159)	0.33 (0.15)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Micro Die Grinders

SG-0570

Micro Die Grinder (70,000 RPM)

SG-0582

Micro Die Grinder (82,000 RPM)



SG-0570A

Micro Angle Die Grinder (70,000 RPM)



Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0570	70,000	1/8 (3)	1/4"	1/4 (6)	1.5 (42.5)	5.5 (140)	0.4 (0.2)
SG-0582	82,000	1/8 (3)	1/4"	1/4 (6)	1.5 (42.5)	5.5 (140)	0.4 (0.2)
SG-0570A	70,000	1/8 (3)	1/4"	1/4 (6)	1.5 (42.5)	7.1 (181)	0.31 (0.14)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-516

Micro Die Grinder (56,000 RPM)



SM-516K

Micro Die Grinder Kit (56,000 RPM)

Kit Includes:

- 1 pc SM-516 Micro Die Grinder
- 1 pc 3 mm Collet Installed
- 10 pcs 3 mm Mounted Points
- 2 pcs Collet Wrench
- 1 pc Nipple
- 1 pc Blow Case



SM-516K-B

Micro Die Grinder Kit (56,000 RPM)

Kit Includes:

- 1 pc SM-516 Micro Die Grinder
- 1 pc 3 mm Collet Installed
- 5 pcs 3 mm Mounted Points
- 5 pcs 3 mm Carbide Burrs
- 2 pcs Collet Wrench
- 1 pc Nipple
- 1 pc Blow Case

Specifications:

Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-516	56,000	1/8 (3)	1/4"	1/4 (6)	1.5 (42.5)	5.5 (140)	0.25 (0.1)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SG-0404

Dual Action Quiet Sander



SG-0420

Dual Action Sander



SG-0416

Jitterbug Sander



SG-0430

Straight Line Sander
- Dual Piston



SM-603-5

5" Random Orbital Sander
- Orbit Dia. 5 mm



SM-603-6

6" Random Orbital Sander
- Orbit Dia. 5 mm

SM-603V-5

5" Random Orbital Sander
- Orbit Dia. 5 mm



SM-603V-6

6" Random Orbital Sander
- Orbit Dia. 5 mm

▲ Dust Free Type

SG-0402

5" High Speed Sander



SM-660

5" High Speed Sander with Regulator



Specifications:

Model No.	Free Speed (RPM)	Pad Size (Inch)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0404	10,000	6"	5/16"-24	1/4"	3/8 (10)	4 (113)	8.2 (209)	4.4 (2)
SG-0420	10,000	6"	5/16"-24	1/4"	3/8 (10)	4 (113)	8.9 (225)	3.8 (1.7)
SG-0416	8,000	3-2/3" x 6-1/2"	-	1/4"	3/8 (10)	4 (113)	7.1 (180)	4 (1.8)
SG-0430	3,000	2-1/2" x 15-3/4"	-	1/4"	3/8 (10)	4 (113)	15.8 (401)	6.25 (3.1)
SM-603-5	10,000	5"	5/16"-24	1/4"	3/8 (10)	18 (457)	5.5 (140)	3 (1.4)
SM-603-6	10,000	6"	5/16"-24	1/4"	3/8 (10)	18 (457)	5.5 (140)	4 (1.8)
SM-603V-5	10,000	5"	5/16"-24	1/4"	3/8 (10)	18 (457)	5.2 (133)	3 (1.4)
SM-603V-6	10,000	6"	5/16"-24	1/4"	3/8 (10)	18 (457)	5.2 (133)	4 (1.8)
SG-0402	18,000	3", 4-1/2", 5-1/2"	7/16"-20	1/4"	3/8 (10)	4 (113)	5.1 (130)	2.2 (1.0)
SM-660	14,000	3", 4-1/2", 5-1/2"	7/16"-20	1/4"	3/8 (10)	4 (113)	6.1 (155)	2 (0.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Air Riveters

SG-0250M

Air Rivet Nut Tool (M12)

SG-0250U

Air Rivet Nut Tool (1/2"-13 UNC)



SG-0300M

Air Rivet Nut Tool (M12)

SG-0300U

Air Rivet Nut Tool (1/2"-13 UNC)



SG-0810

Air Riveter (3/16")



SG-0811

Air Riveter (3/16")



SG-0814

Heavy Duty Air Riveter (1/4")



SG-0814M

Heavy Duty Air Riveter (1/4")



SG-0810K

Air Riveter Kit



Specifications:

Model No.	Blind Rivet Setting Capacity	Traction Power (Lbs)	Stroke Length (Inch)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)
SG-0250M	M12	4,800	1/4	1/4"	3/8 (10)	12.2 (310)	5.3 (2.4)
SG-0250U	1/2"-13 UNC	4,800	1/4	1/4"	3/8 (10)	12.2 (310)	5.3 (2.4)
SG-0300M	M12	6,000	1/4	1/4"	3/8 (10)	12.2 (310)	5.1 (2.3)
SG-0300U	1/2"-13 UNC	6,000	1/4	1/4"	3/8 (10)	12.2 (310)	5.1 (2.3)
SG-0810	3/16"	1,940	9/16	1/4"	3/8 (10)	10.6 (270)	4.4 (1.9)
SG-0811	3/16"	1,983	11/16	1/4"	3/8 (10)	11.8 (300)	3.3 (1.5)
SG-0814	1/4"	3,055	5/8	1/4"	3/8 (10)	11.8 (300)	4.6 (2)
SG-0814M	1/4"	3,099	5/8	1/4"	3/8 (10)	12.6 (320)	4.6 (2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SG-0822

Air Body Saw



SA-24S

24 Teeth Saw Blade for SG-0822 (Optional)

SA-32S

32 Teeth Saw Blade for SG-0822 (Optional)

SG-0827

Air Body Saw & Filer



SG-0828

Air Body Saw

- with Exhaust Hose



SG-0829

Air Body Saw



SG-0829H

Air Body Saw

- with Exhaust Hose



SG-0831

Air Body Saw

- Composite
- Vibration Reduced



SG-0832

Air Pipe Saw

- Composite
- Vibration Reduced



SG-0833

Air Mini Body Saw



Specifications:

Model No.	Strokes Per Minute	Stroke Length (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0822	9,000	10	1/4"	3/8 (10)	4 (113)	9.3 (235)	1.2 (0.5)
SG-0827	8,000	10	1/4"	3/8 (10)	6 (150)	39.5 (1,003)	1.9 (0.7)
SG-0828	5,000	10	1/4"	3/8 (10)	4 (113)	9.8 (249)	2.4 (1.1)
SG-0829	9,000	10	1/4"	3/8 (10)	4 (113)	10.4 (263)	1.5 (0.7)
SG-0829H	9,000	10	1/4"	3/8 (10)	4 (113)	10.4 (263)	1.5 (0.7)
SG-0831	9,500	10	1/4"	3/8 (10)	3 (90)	11.8 (300)	1.1 (0.5)
SG-0832	5,000	25	1/4"	3/8 (10)	2.8 (80)	13.5 (343)	1.7 (0.8)
SG-0833	10,000	10	1/4"	3/8 (10)	2 (57)	8.2 (208)	1.0 (0.45)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Window Cut-Off Knives

SM-518 & SM-519

Auto Window Cut-Off Knife

Accessories (Optional):

- #51851 2-1/4" Blade (57mm)
- #51854 3-1/2" Blade (90mm)
- #51852 1-3/8" Short Blade (35mm)
- #51853 1-1/4" Curved Blade (30mm)
- #51860 5/16" Scraper Blade (8mm)
- #51861 1-3/8" Serrated Blade (35mm)
- #51862 1-3/8" Blade (35mm)
- #51855 3/4" Blade (18mm)
- #51857 1-1/2" Blade (36mm)
- #51858 2-1/2" Blade (63mm)
- #51859 3-1/2" Blade (90mm)



#51851
2-1/4" Blade (57mm)



#51854
3-1/2" Blade (90mm)



#51852
1-3/8" Short Blade (35mm)



#51853
1-1/4" Curved Blade (30mm)



#51860
5/16" Scraper Blade (8mm)



#51861
1-3/8" Serrated Blade (35mm)



#51862
1-3/8" Blade (35mm)

#51855
3/4" Blade (18mm)

#51858
2-1/2" Blade (63mm)

#51857
1-1/2" Blade (36mm)

#51859
3-1/2" Blade (90mm)



SM-518

Auto Window Cut-Off Knife



SM-519

Auto Window Cut-Off Knife

Specifications:

Model No.	Oscillation (Cycles) Per Min.	Stroke Arc.	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-518	20,000	3 °	1/4"	3/8 (10)	4 (113)	7.9 (200)	2.25 (1)
SM-519	20,000	3 °	1/4"	3/8 (10)	4 (113)	8.2 (208)	2.7 (1.2)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Punches

SG-0692

Air Punch / Flange Tool - 5mm

SG-0693

Air Punch / Flange Tool - 8mm



Specifications:

Model No.	Capacity Steel (mm)	Punch (mm)	Flange Width (mm)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0692	0.8-1.4	5	12	3/8 (10)	4 (113)	10 (254)	2.9 (1.3)
SG-0693	0.8-1.4	8	12	3/8 (10)	4 (113)	10 (254)	3.1 (1.4)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Scraper

SG-0815

Air Scraper



Specifications:

Model No.	Bore Diameter (mm)	Blows Per Min. (BPM)	Stroke Length (mm)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0815	12.7	4,500	57	3/8 (10)	4.5 (115)	9.8 (248)	1.5 (0.7)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Spray Guns

SG-1042

Air Spray Gun



SG-1043

Air Spray Gun



SG-1046

Air Spray Gun



SG-1047

Air Spray Gun



SG-1048

Air Spray Gun



Specifications:

Model No.	Fluid Tip Size (I.D.) (mm)	Nozzle Size (mm)	Cup Capacity	Fluid Inlet	Air Inlet (NPT)	Air Pressure (PSI)	Air Consumption CFM (L/Min)	Height Inch (mm)	Weight Lbs (Kg)	Type
SG-1042	Ø 1.5	Ø 1.5, Ø 2.0 & Ø 2.5	0.3L	1/4"	1/4"	50-70	8 (226)	11 (279)	2 (0.9)	Gravity
SG-1043	Ø 1.5	Ø 1.5, Ø 2.0 & Ø 2.5	1L	3/8"	1/4"	50-70	8 (226)	11.2 (284)	2 (0.9)	Suction
SG-1046	Ø 1.6	Ø 1.5, Ø 1.6, Ø 1.8 & Ø 2.0	1L	3/8"	1/4"	50-70	8 (226)	11.5 (292)	2.3 (1)	Suction
SG-1047	Ø 0.8	Ø 0.5, Ø 0.8 & Ø 1.5	0.25L	M14 x 1.0	1/4"	35	4.5 (127)	12.8 (325)	0.7 (0.3)	Gravity
SG-1048	Ø 1.4	Ø 1.4, Ø 1.7 & Ø 2.0	0.6L	M16 x 1.5	1/4"	50-70	8.8-11.3 (249-320)	9.5 (241)	1.6 (0.7)	Gravity

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SG-0825

Air Filer



Accessories (Optional):



SA-0825S

4 pcs File Set


Specifications:

Model No.	Stroke Speed (cycles/Min.)	Max. Shank Dia. Of Points	Stroke Length (mm)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SG-0825	3,700	1/4"	9	3/8 (10)	8.5 (216)	7.1 (180)	2.2 (1)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-204S

Straight Air Shear



SM-204RG

Air Shear



SM-204

Air Shear



Specifications:

Model No.	Blows Per Minute (BPM)	Cutting Capacity Steel (Gauge)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-204S	2,800	18	1/4"	3/8 (10)	4 (113)	10.1 (256)	2.2 (1)
SM-204RG	2,800	18	1/4"	3/8 (10)	4 (113)	9.1 (230)	2.9 (1.3)
SM-204	2,800	18	1/4"	3/8 (10)	4 (113)	9.1 (230)	2.9 (1.3)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

SM-213

Air Nibbler
- Pull Type



Specifications:

Model No.	Capacity Steel (mm)	Cutting Speed (MPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
SM-213	1.2	2.6	1/4"	3/8 (10)	4 (113)	6.9 (176)	2 (0.9)

* Recommended Air Pressure at 90 PSI (6.2 Bar)

Double Suction Cups & Kits

Features:

- Double Suction Pads for Secure Grip.
- Standard With Ratchet Tie Down for One Person Auto Glass Repair.
- Can Be Used on Glass, Plastic, Appliance, Steel, Alumium, etc.
- Each Double Pad Handle Can Lift Approximatly 240 Lbs.

SM-911

Double Suction Cup
- Plastic Cup



SM-911K

Double Suction Cup Kit with Strap
- Plastic Cup

SM-911KNH

Double Suction Cup Kit without Strap
- Plastic Cup



SM-9111

Double Suction Cup
- Big Plastic Cup



SM-9111K

Double Suction Cup Kit with Strap
- Big Plastic Cup



Two Way Gun & Kit

SG-1222

Two Way Gun



SG-1222K

Two Way Gun Kit



Kit Includes:

- 1 pc SG-1222 Two Way Gun
- 1 pc Small Bore Vacuum Tube
- 1 pc Brush
- 1 pc Flat Tube



Other Tools & Accessories

SG-9907

Air Caulking Gun



- ▶ Capacity of Cartridge : 310 ml
- ▶ Recommended Air Pressure at 65 PSI (4.5 Bar)

SG-025

Mini Grease Gun



- ▶ Capacity Bulk 80 cc
- ▶ Working Pressure 1000 PSI
- ▶ Chrome Plated Finish for Long Service Life




SG-1072-1

1" Air Duster (25mm)



SG-1072-4

4" Air Duster (130mm)

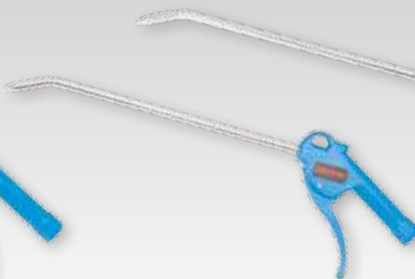

SG-1072-10

10" Air Duster (250mm)



SG-1072-20

20" Air Duster (500mm)



SG-9052

1/4" Air Regulator (Brass)



#61558-21

1/4" Air Regulator (Aluminum)



G-301

Mini Oiler



SA-12

Universal Air Connectors - 1/2" NPT

SA-14

Universal Air Connectors - 1/4" NPT

SA-38

Universal Air Connectors - 3/8" NPT



SA-225

Nylon Air Recoil Hoses (Swivel Head) - 1/4" NPT x 25'

SA-250

Nylon Air Recoil Hoses (Swivel Head) - 1/4" NPT x 50'

SA-325

Nylon Air Recoil Hoses (Swivel Head) - 3/8" NPT x 25'

SA-350

Nylon Air Recoil Hoses (Swivel Head) - 3/8" NPT x 50'



SA-225PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 5mm(ID) x 8mm(OD) x 7.5m

SA-250PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 5mm(ID) x 8mm(OD) x 15m

SA-325PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 6.5mm(ID) x 9.5mm(OD) x 7.5m

SA-350PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 6.5mm(ID) x 9.5mm(OD) x 15m

SA-430PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 8mm(ID) x 12mm(OD) x 9m

SA-450PU

1/4" P.U. Air Recoil Hoses (Swivel Head)
- 8mm(ID) x 12mm(OD) x 15m

Tool Index

Model No.	Description	Page
<i>SG-0102H</i>	135mm Air Hammer - Hex. Shank	166
<i>SG-0102R</i>	135mm Air Hammer - Round Shank	166
<i>SG-0122H-1</i>	1" Chipping Hammer - Hex. Shank	168
<i>SG-0122H-2</i>	2" Chipping Hammer - Hex. Shank	168
<i>SG-0122H-3</i>	3" Chipping Hammer - Hex. Shank	168
<i>SG-0122H-4</i>	4" Chipping Hammer - Hex. Shank	168
<i>SG-0122R-1</i>	1" Chipping Hammer - Round Shank	168
<i>SG-0122R-2</i>	2" Chipping Hammer - Round Shank	168
<i>SG-0122R-3</i>	3" Chipping Hammer - Round Shank	168
<i>SG-0122R-4</i>	4" Chipping Hammer - Round Shank	168
<i>SG-0123H</i>	Mini Chipping Hammer - Hex. Shank	168
<i>SG-0123R</i>	Mini Chipping Hammer - Round Shank	168
<i>SG-0204RNS</i>	Needle Scaler	170
<i>SG-0218-2X</i>	Riveting Hammer	167
<i>SG-0218-3X</i>	Riveting Hammer	167
<i>SG-0218-4X</i>	Riveting Hammer	167
<i>SG-0218-5X</i>	Riveting Hammer	167
<i>SG-0218-7X</i>	Riveting Hammer	167
<i>SG-0218-9X</i>	Riveting Hammer	167
<i>SG-025</i>	Mini Grease Gun	193
<i>SG-0250M</i>	Air Rivet Nut Tool (M12)	187
<i>SG-0250U</i>	Air Rivet Nut Tool (1/2"-13 UNC)	187
<i>SG-0300M</i>	Air Rivet Nut Tool (M12)	187
<i>SG-0300U</i>	Air Rivet Nut Tool (1/2"-13 UNC)	187
<i>SG-0315</i>	Flux Chipper	169
<i>SG-0315NS</i>	Needle Scaler	169
<i>SG-0402</i>	5" High Speed Sander	186
<i>SG-0404</i>	Dual Action Quiet Sander	186
<i>SG-0416</i>	Jitterbug Sander	186
<i>SG-0420</i>	Dual Action Sander	186
<i>SG-0430</i>	Straight Line Sander	186
<i>SG-0570</i>	Micro Die Grinder (70,000 RPM)	184
<i>SG-0570A</i>	Micro Angle Die Grinder (70,000 RPM)	184
<i>SG-0573</i>	Engraving Tool (3,800 BPM)	184
<i>SG-0574</i>	Engraving Tool (3,400 BPM)	184
<i>SG-0575</i>	Engraving Tool (13,000 BPM)	184
<i>SG-0582</i>	Micro Die Grinder (82,000 RPM)	184
<i>SG-0692</i>	Air Punch / Flange Tool - 5mm	189
<i>SG-0693</i>	Air Punch / Flange Tool - 8mm	189
<i>SG-0704L</i>	1" Impact Wrench	173
<i>SG-0704S</i>	1" Impact Wrench	173
<i>SG-0705L</i>	1" Impact Wrench	173
<i>SG-0705S</i>	1" Impact Wrench	173
<i>SG-0706L</i>	1" Impact Wrench	173
<i>SG-0706S</i>	1" Impact Wrench	173
<i>SG-0707L</i>	1" Impact Wrench	173
<i>SG-0707S</i>	1" Impact Wrench	173
<i>SG-0708L</i>	1" Impact Wrench	173
<i>SG-0708S</i>	1" Impact Wrench	173
<i>SG-0709L</i>	1" Impact Wrench	173
<i>SG-0709S</i>	1" Impact Wrench	173
<i>SG-0716</i>	1/2" Impact Wrench	172
<i>SG-0716L</i>	1/2" Impact Wrench	172
<i>SG-0717</i>	1/2" Impact Wrench	172
<i>SG-0717L</i>	1/2" Impact Wrench	172
<i>SG-0735</i>	1/2" Heavy Duty Ratchet Wrench	170
<i>SG-0740</i>	3/4" Impact Wrench	172
<i>SG-0740L</i>	3/4" Impact Wrench	172

Model No.	Description	Page
<i>SG-0750</i>	3/4" Impact Wrench	172
<i>SG-0750L</i>	3/4" Impact Wrench	172
<i>SG-0751</i>	3/4" Impact Wrench	172
<i>SG-0751L</i>	3/4" Impact Wrench	172
<i>SG-0775</i>	3/8" Impact Wrench	171
<i>SG-0810</i>	Air Riveter (3/16")	187
<i>SG-0810K</i>	Air Riveter Kit	187
<i>SG-0811</i>	Air Riveter (3/16")	187
<i>SG-0814</i>	Heavy Duty Air Riveter (1/4")	187
<i>SG-0814M</i>	Heavy Duty Air Riveter (1/4")	187
<i>SG-0815</i>	Air Scraper	190
<i>SG-0822</i>	Air Body Saw	188
<i>SG-0825</i>	Air Filer	191
<i>SG-0827</i>	Air Body Saw & Filer	188
<i>SG-0828</i>	Air Body Saw	188
<i>SG-0829</i>	Air Body Saw	188
<i>SG-0829H</i>	Air Body Saw	188
<i>SG-0831</i>	Air Body Saw	188
<i>SG-0832</i>	Air Pipe Saw	188
<i>SG-0833</i>	Air Mini Body Saw	188
<i>SG-0905</i>	1/4" Air Screwdriver (8,000 RPM)	179
<i>SG-0909</i>	1/4" Air Screwdriver (1,500 RPM)	179
<i>SG-1042</i>	Air Spray Gun	190
<i>SG-1043</i>	Air Spray Gun	190
<i>SG-1046</i>	Air Spray Gun	190
<i>SG-1047</i>	Air Spray Gun	190
<i>SG-1048</i>	Air Spray Gun	190
<i>SG-1072-1</i>	1" Air Duster (25mm)	193
<i>SG-1072-10</i>	10" Air Duster (250mm)	193
<i>SG-1072-20</i>	20" Air Duster (500mm)	193
<i>SG-1072-4</i>	4" Air Duster (130mm)	193
<i>SG-1222</i>	Two Way Gun	192
<i>SG-1222K</i>	Two Way Gun Kit	192
<i>SG-2100NS</i>	Needle Scaler	169
<i>SG-2110NS</i>	Needle Scaler	169
<i>SG-2111NS</i>	Needle Scaler	169
<i>SG-2200</i>	Scaling Hammer	170
<i>SG-2280</i>	Needle Scaler	169
<i>SG-2288</i>	Flux Chipper	169
<i>SG-2288NS</i>	Needle Scaler	169
<i>SG-9052</i>	1/4" Air Regulator (Brass)	193
<i>SG-9121</i>	Flux Chipper	169
<i>SG-9121NS</i>	Needle Scaler	169
<i>SG-9907</i>	Air Caulking Gun	193
<i>SM-0101H</i>	Short Air Hammer - Hex. Shank	166
<i>SM-0101R</i>	Short Air Hammer - Round Shank	166
<i>SM-0204H</i>	Medium Air Hammer - Hex. Shank	166
<i>SM-0204PSH</i>	Medium Air Hammer Kit - Hex. Shank	166
<i>SM-0204PSR</i>	Medium Air Hammer Kit - Round Shank	166
<i>SM-0204R</i>	Medium Air Hammer - Round Shank	166
<i>SM-0304H</i>	Long Air Hammer	166
<i>SM-0304PSH</i>	Long Air Hammer Kit	166
<i>SM-0304PSR</i>	Long Air Hammer Kit	166
<i>SM-0304R</i>	Long Air Hammer	166
<i>SM-0915</i>	Suspending Stand	34
<i>SM-10-1001</i>	Scribe / Engraving Chisel	156
<i>SM-10-1001K</i>	Scribe / Engraving Chisel Kit	156
<i>SM-102</i>	Short Air Hammer	168

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-103	Long Barrel Hammer	164	SM-33-3024	3/8" Mini Ratchet Wrench	38
SM-103H	Long Barrel Hammer - Hex. Shank	164	SM-33-3100	3/8" Stubby Ratchet Wrench	170
SM-103H1	Long Barrel Hammer - Hex. Shank	164	SM-33-3117	3/8" Impact Ratchet Wrench	36
SM-103H1K	Long Barrel Hammer Kit - Hex. Shank	164	SM-33-3117A	3/8" Impact Ratchet Wrench	40
SM-103HK	Long Barrel Hammer Kit - Hex. Shank	164	SM-33-3123A	3/8" Air Ratchet Wrench	40
SM-103K	Long Barrel Hammer Kit - Round Shank	164	SM-33-3124A	3/8" Mini Ratchet Wrench	40
SM-103S	Short Barrel Hammer - Round Shank	164	SM-34-3013	1/2" Air Ratchet Wrench	39
SM-103SH	Short Barrel Hammer - Hex. Shank	164	SM-34-3023	1/2" Air Ratchet Wrench	38
SM-103SH1	Short Barrel Hammer - Hex. Shank	164	SM-34-3023K	1/2" Air Ratchet Wrench Kit	38
SM-104	Flux Chipper	168	SM-34-3117	1/2" Impact Ratchet Wrench	36
SM-108	Super-Duty Air Hammer - Round Shank	162	SM-34-3117A	1/2" Impact Ratchet Wrench	40
SM-108H	Super-Duty Air Hammer - Hex. Shank	162	SM-34-3123A	1/2" Air Ratchet Wrench	40
SM-108H1	Super-Duty Air Hammer - Hex. Shank	162	SM-401	3/8" Butterfly Impact Wrench	171
SM-108H1K	Super-Duty Air Hammer Kit - Hex. Shank	162	SM-4011A	1/2" Butterfly Impact Wrench	171
SM-108HK	Super-Duty Air Hammer Kit - Hex. Shank	162	SM-401A	3/8" Butterfly Impact Wrench	171
SM-108K	Super-Duty Air Hammer Kit - Round Shank	162	SM-401AK	3/8" Butterfly Impact Wrench Kit	171
SM-108K2	Vibro Impact Air Hammer Kit - Round Shank	163	SM-403	1/2" Impact Wrench	172
SM-1522	Suspending Stand	34	SM-403K-17	1/2" Impact Wrench W/Socket Set	172
SM-204	Air Shear	191	SM-403L	1/2" Impact Wrench	172
SM-204RG	Air Shear	191	SM-4040	Bead Breaker	150
SM-204S	Straight Air Shear	191	SM-40-7253P	1/4" Mini Impact Wrench	13
SM-213	Air Nibbler	191	SM-40-7254P	1/4" Mini Impact Wrench	13
SM-2711H	Heavy Duty Medium Hammer	167	SM-40-7500	1/4" Mini Impact Wrench	131
SM-2711PSH	Heavy Duty Medium Hammer Kit	167	SM-40-7500AK	Vibration Impact Wrench Kit	158
SM-2711PSR	Heavy Duty Medium Hammer Kit	167	SM-41-4001	3/8" Stubby Impact Wrench	15
SM-2711R	Heavy Duty Medium Hammer	167	SM-41-4002	3/8" Stubby Impact Wrench	15
SM-2715H	Heavy Duty Long Hammer	167	SM-41-4012P	3/8" Impact Wrench	4
SM-2715PSH	Heavy Duty Long Hammer Kit	167	SM-41-4015P	3/8" Stubby Impact Wrench	14
SM-2715PSR	Heavy Duty Long Hammer Kit	167	SM-41-4015P2	3/8" Stubby Impact Wrench	14
SM-2715R	Heavy Duty Long Hammer	167	SM-41-4017G	3/8" Impact Wrench	24
SM-284S	Straight Air Shear	181	SM-41-4019P	3/8" Impact Wrench	10
SM-28-7063	Air Metal Shear	143	SM-41-4024P	3/8" Impact Wrench	6
SM-29-3011B	Straight Air Shear	54	SM-41-4113P	3/8" Impact Wrench	22
SM-29-3011X	Straight Air Shear	55	SM-41-4114P	3/8" Impact Wrench	18
SM-29-3011Y	Straight Air Shear	56	SM-41-7253P	3/8" Mini Impact Wrench	13
SM-29-3011Z	Straight Air Shear	57	SM-41-7254P	3/8" Mini Impact Wrench	13
SM-2945	Air Metal Shear	143	SM-41-7500	3/8" Mini Impact Wrench	131
SM-29-5100	Straight Air Shear	47	SM-43-231F	1/2" Impact Wrench	174
SM-30	3/8" Ratchet Wrench	170	SM-43-231FRG	1/2" Impact Wrench	174
SM-31	1/2" Ratchet Wrench	170	SM-43-231H	1/2" Impact Wrench	174
SM-31K	1/2" Ratchet Wrench Kit	171	SM-43-231HL	1/2" Impact Wrench	174
SM-32-3012	1/4" Baby Ratchet Wrench	39	SM-43-231HRG	1/2" Impact Wrench	174
SM-32-3014	1/4" Mini Ratchet Wrench	39	SM-43-231HRGK3	1/2" Impact Wrench Kit	174
SM-32-3015	1/4" Stubby Ratchet Wrench	36	SM-43-4001	1/2" Stubby Impact Wrench	15
SM-32-3016	Multi-Function Ratchet Wrench	37	SM-43-4002	1/2" Stubby Impact Wrench	15
SM-32-3016K	Multi-Function Ratchet Wrench Kit	37	SM-43-4010	1/2" Angle Impact Wrench	20
SM-32-3016K2	Multi-Function Ratchet Wrench Kit	37	SM-43-4011P	1/2" Stubby Impact Wrench	16
SM-32-3022	1/4" Baby Ratchet Wrench	38	SM-43-4011P2	1/2" Stubby Impact Wrench	16
SM-32-3024	1/4" Mini Ratchet Wrench	38	SM-43-4012A	1/2" Mini Impact Wrench	8
SM-32-3100	1/4" Stubby Ratchet Wrench	170	SM-43-4012P	1/2" Mini Impact Wrench	4
SM-32-3124A	1/4" Mini Ratchet Wrench	40	SM-43-4013P	1/2" Stubby Impact Wrench	17
SM-33-3012	3/8" Baby Ratchet Wrench	39	SM-43-4013P2	1/2" Stubby Impact Wrench	17
SM-33-3013	3/8" Air Ratchet Wrench	39	SM-43-4015P	1/2" Stubby Impact Wrench	14
SM-33-3014	3/8" Mini Ratchet Wrench	39	SM-43-4015P2	1/2" Stubby Impact Wrench	14
SM-33-3015	3/8" Stubby Ratchet Wrench	36	SM-43-4017G	1/2" Mini Impact Wrench	24
SM-33-3022	3/8" Baby Ratchet Wrench	38	SM-43-4019P	1/2" Mini Impact Wrench	10
SM-33-3023	3/8" Air Ratchet Wrench	38	SM-43-4024P	1/2" Mini Impact Wrench	6
SM-33-3023K	3/8" Air Ratchet Wrench Kit	38	SM-43-4031P1	1/2" Impact Wrench	9

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-43-4031P3	1/2" Impact Wrench	9	SM-47-4072L6	1" Heavy Duty Impact Wrench - Twin Hammer	28
SM-43-4033A	1/2" Impact Wrench	8	SM-47-4072L6K	1" Heavy Duty Impact Wrench Kit	29
SM-43-4033AL	1/2" Impact Wrench	8	SM-47-4072L8	1" Heavy Duty Impact Wrench - Twin Hammer	28
SM-43-4033P	1/2" Impact Wrench	4	SM-47-4072L8K	1" Heavy Duty Impact Wrench Kit	29
SM-43-4033P2	1/2" Impact Wrench	9	SM-47-4073	1" Impact Wrench	30
SM-43-4033PK	1/2" Impact Wrench Kit	12	SM-47-4073L7	1" Impact Wrench	30
SM-43-4033PK3	1/2" Impact Wrench Kit	12	SM-47-4073L7Q	1" Impact Wrench (Lower Noise)	30
SM-43-4033PL	1/2" Impact Wrench	4	SM-47-4073L8	1" Impact Wrench	30
SM-43-4034P	1/2" Impact Wrench	6	SM-47-4073L8Q	1" Impact Wrench (Lower Noise)	30
SM-43-4034PL	1/2" Impact Wrench	6	SM-47-4074	1" Impact Wrench	33
SM-43-4035P3	1/2" Impact Wrench	25	SM-47-4074L7	1" Impact Wrench	33
SM-43-4037G	1/2" Impact Wrench	24	SM-47-4074L8	1" Impact Wrench	33
SM-43-4038P	1/2" Super Impact Wrench	26	SM-47-4075	1" Impact Wrench	32
SM-43-4038PL	1/2" Super Impact Wrench - with 2" Ext. Anvil	26	SM-47-4075L6	1" Impact Wrench	32
SM-43-4039P	1/2" Impact Wrench	10	SM-47-4075L8	1" Impact Wrench	32
SM-43-4039PL	1/2" Impact Wrench	10	SM-47-4076	1" Impact Wrench	31
SM-43-4113P	1/2" Mini Impact Wrench	22	SM-47-4076L7	1" Impact Wrench	31
SM-43-4114P	1/2" Mini Impact Wrench	18	SM-47-4076L8	1" Impact Wrench	31
SM-43-4131P1	1/2" Impact Wrench	23	SM-47-4151P	1" Impact Wrench	23
SM-43-4131P2	1/2" Impact Wrench	23	SM-47-4151PL	1" Impact Wrench	23
SM-43-4131PL	1/2" Impact Wrench	23	SM-47-4153P	1" Impact Wrench	22
SM-43-4133P1	1/2" Impact Wrench	22	SM-47-4154L	1" Impact Wrench	19
SM-43-4133P2	1/2" Impact Wrench	22	SM-47-4154P	1" Impact Wrench	19
SM-43-4133PL	1/2" Impact Wrench	22	SM-48-7253P	1/4" Hex Impact Driver	13
SM-43-4134L	1/2" Impact Wrench	18	SM-48-7254P	1/4" Hex Impact Driver	13
SM-43-4134P	1/2" Impact Wrench	18	SM-48-7500	1/4" Impact Driver	131
SM-43-4137	1/2" Impact Wrench	174	SM-5001	Heavy Duty Straight Die Grinder	49
SM-45-4034P	3/4" Mini Impact Wrench	21	SM-501C	1/4" Die Grinder	183
SM-45-4035P	3/4" Mini Impact Wrench	25	SM-502	3/8" High Speed Drill	176
SM-45-4051A	3/4" Impact Wrench	8	SM-50-240N	Die Grinder (24,000 RPM)	48
SM-45-4051P	3/4" Impact Wrench	5	SM-50-240S	Die Grinder (24,000 RPM)	48
SM-45-4051PL	3/4" Impact Wrench	5	SM-50-241N	Die Grinder (24,000 RPM)	48
SM-45-4054P	3/4" Impact Wrench	7	SM-50-241S	Die Grinder (24,000 RPM)	48
SM-45-4054PL	3/4" Impact Wrench	7	SM-50-250N	Die Grinder (24,000 RPM)	48
SM-45-4057G	3/4" Impact Wrench	24	SM-50-250R	Die Grinder (24,000 RPM)	48
SM-45-4057LG	3/4" Impact Wrench	24	SM-50-250S	Die Grinder (24,000 RPM)	48
SM-45-4059P	3/4" Impact Wrench	11	SM-50-280R	Die Grinder (24,000 RPM)	48
SM-45-4059PL	3/4" Impact Wrench	11	SM-50-281R	Die Grinder (24,000 RPM)	48
SM-45-4134P	3/4" Mini Impact Wrench	21	SM-50-290N	Die Grinder (24,000 RPM)	48
SM-45-4151P	3/4" Impact Wrench	23	SM-50-290S	Die Grinder (24,000 RPM)	48
SM-45-4151PL	3/4" Impact Wrench	23	SM-50-291N	Die Grinde (24,000 RPM)	48
SM-45-4153P	3/4" Impact Wrench	22	SM-50-291S	Die Grinder (24,000 RPM)	48
SM-45-4154L	3/4" Impact Wrench	19	SM-50-5200	Die Grinder	59
SM-45-4154P	3/4" Impact Wrench	19	SM-5115C	1/4" Die Grinder - 15,000 RPM	60
SM-47-4051P	1" Impact Wrench	5	SM-5118C	1/4" Die Grinder - 18,000 RPM	60
SM-47-4051PL	1" Impact Wrench	5	SM-512	1/4" Die Grinder	182
SM-47-4054P	1" Impact Wrench	7	SM-5120C	1/4" Die Grinder - 20,000 RPM	60
SM-47-4054PL	1" Impact Wrench	7	SM-5125A	1/4" Die Grinder - 25,000 RPM	60
SM-47-4057G	1" Impact Wrench	24	SM-512F	1/4" Extended Die Grinder	182
SM-47-4057LG	1" Impact Wrench	24	SM-512K	1/4" Die Grinder Kit	182
SM-47-4059P	1" Impact Wrench	11	SM-512S	1/4" Die Grinder	182
SM-47-4059PL	1" Impact Wrench	11	SM-512SC8	8 mm Die Grinder	182
SM-47-4071	1" Heavy Duty Impact Wrench	28	SM-512SH	1/4" Die Grinder (Full Size)	159
SM-47-4071L7	1" Heavy Duty Impact Wrench - Pinless Clutch	28	SM-51-3011B	1/4" Die Grinder - Full Size	54
SM-47-4071L7K	1" Heavy Duty Impact Wrench Kit	29	SM-51-3011X	1/4" Die Grinder - Full Size	55
SM-47-4071L9	1" Heavy Duty Impact Wrench - Pinless Clutch	28	SM-51-3011Y	1/4" Die Grinder - Full Size	56
SM-47-4071L9K	1" Heavy Duty Impact Wrench Kit	29	SM-51-3011Z	1/4" Die Grinder - Full Size	57
SM-47-4072	1" Heavy Duty Impact Wrench	28	SM-5130A	1/4" Die Grinder - 30,000 RPM	60

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-51-5100	1/4" Die Grinder - Full Size	47	SM-572FP	1/4" Extended Die Grinder	58
SM-516	Micro Die Grinder (56,000 RPM)	185	SM-572P	1/4" Air Die Grinder	58
SM-516K	Micro Die Grinder Kit (56,000 RPM)	185	SM-575P	1/4" Air Die Grinder	58
SM-516K-B	Micro Die Grinder Kit (56,000 RPM)	185	SM-576P	3" Cut-Off Tool	58
SM-518	Auto Window Cut-Off Knife	189	SM-580	3/8" High Speed Straight Air Drill	181
SM-519	Auto Window Cut-Off Knife	189	SM-582	1/4" Die Grinder - Full Size	181
SM-5218D	1/4" Die Grinder - 18,000 RPM	60	SM-582F	1/4" Extended Die Grinder	181
SM-522	1/4" Angle Die Grinder	183	SM-585	1/4" Die Grinder	181
SM-5220D	1/4" Die Grinder - 20,000 RPM	60	SM-586	3" Cut-Off Tool	181
SM-5225B	1/4" Die Grinder - 25,000 RPM	60	SM-586A	3" Cut-Off Tool	181
SM-522SH	1/4" Mini Angle Die Grinder	159	SM-5B-3271	4" Angle Grinder & Cut-Off Tool	75
SM-52-301B	Angle Die Grinder	61	SM-5B-6192A	4" Angle Grinder	70
SM-52-301X	Angle Die Grinder	61	SM-5B-6192AS	4" Angle Grinder	70
SM-5230B	1/4" Die Grinder - 25,000 RPM	60	SM-5B-6192PS	4" Angle Grinder	71
SM-52-3271	1/4" Angle Die Grinder	75	SM-5B-6192PSH	4" Angle Grinder	159
SM-52-512B	Angle Die Grinder	61	SM-5B-6400L	4" Angle Grinder	64
SM-52-5200	Angle Die Grinder	59	SM-5B-6400R	4" Angle Grinder	64
SM-52-5201	Angle Die Grinder	59	SM-5B-6410	4" Angle Grinder	68
SM-52-52251	1/4" 90° Angle Die Grinder	51	SM-5B-6410R	4" Angle Grinder	68
SM-52-52252	1/4" 90° Angle Die Grinder	51	SM-5B-6410S	4" Angle Grinder	69
SM-52-5227	1/4" 90° Angle Die Grinder	53	SM-5B-6414	4" Angle Grinder	65
SM-52-5227K	1/4" 90° Angle Die Grinder Kit	52	SM-5B-6414S	4" Angle Grinder	65
SM-52-5227K2	1/4" 90° Angle Die Grinder Kit	52	SM-5B-6422	4" Angle Grinder	66
SM-52-5229	1/4" 90° Angle Die Grinder	53	SM-5C-3271	4-1/2" Angle Grinder & Cut-Off Tool	75
SM-52-5300	1/4" 90° Angle Die Grinder	46	SM-5C-6192A	4-1/2" Angle Grinder	70
SM-52-5300K	1/4" 90° Angle Die Grinder Kit	46	SM-5C-6192AS	4-1/2" Angle Grinder	70
SM-526	Cut-Off Tool	183	SM-5C-6192PS	4-1/2" Angle Grinder	71
SM-5263R	3" Reversible Cut-Off Tool	82	SM-5C-6410	4-1/2" Angle Grinder	68
SM-5265R	3" Reversible Cut-Off Tool	82	SM-5C-6410R	4-1/2" Angle Grinder	68
SM-5265RK	Reversible Cut-Off Tool Kit	82	SM-5C-6410S	4-1/2" Angle Grinder	69
SM-532	1/4" Mini Die Grinder	182	SM-5C-6414	4-1/2" Angle Grinder	65
SM-532E	1/4" Extended Mini Die Grinder	182	SM-5C-6414S	4-1/2" Angle Grinder	65
SM-532K	1/4" Mini Die Grinder Kit	182	SM-5C-6422	4-1/2" Angle Grinder	66
SM-53-52251	1/4" Mini Die Grinder	51	SM-5D-3271	5" Angle Grinder & Cut-Off Tool	75
SM-53-52252	1/4" Mini Die Grinder	51	SM-5D-3272	5" Angle Grinder & Cut-Off Tool	75
SM-53-5227	1/4" Mini Die Grinder	53	SM-5D-6191PS	5" Angle Grinder	63
SM-53-5227K	1/4" Mini Die Grinder Kit	52	SM-5D-6192A	5" Angle Grinder	70
SM-53-5229	1/4" Mini Die Grinder	53	SM-5D-6192AS	5" Angle Grinder	70
SM-53-5300	1/4" Mini Die Grinder	46	SM-5D-6192AW	5" Air Wet Angle Sander (10,000 RPM)	74
SM-53-5300K	1/4" Mini Die Grinder Kit	46	SM-5D-6192PS	5" Angle Grinder	71
SM-53-5522	Industrial Die Grinder	49	SM-5D-6400L	5" Angle Grinder	64
SM-53-5530	Industrial Die Grinder	49	SM-5D-6400R	5" Angle Grinder	64
SM-542	1/4" Heavy Duty Mini Angle Die Grinder	183	SM-5D-6401L	5" Angle Grinder	64
SM-54-3011B	1/4" Die Grinder	54	SM-5D-6401R	5" Angle Grinder	64
SM-54-3011X	1/4" Die Grinder	55	SM-5D-6410	5" Angle Grinder	68
SM-54-3011Y	1/4" Die Grinder	56	SM-5D-6410R	5" Angle Grinder	68
SM-54-3011Z	1/4" Die Grinder	57	SM-5D-6410S	5" Angle Grinder	69
SM-545	1/4" Hand Die Grinder	183	SM-5D-6412	5" Angle Grinder	67
SM-54-5100	1/4" Die Grinder	47	SM-5D-6412R	5" Angle Grinder	67
SM-552S	1/4" Mini Die Grinder	183	SM-5D-6414	5" Angle Grinder	65
SM-55-52251	1/4" 115° Angle Die Grinder	51	SM-5D-6414S	5" Angle Grinder	65
SM-55-52252	1/4" 115° Angle Die Grinder	51	SM-5D-6422	5" Angle Grinder	66
SM-55-5227	1/4" 115° Angle Die Grinder	53	SM-5E-260N	Extended Die Grinder (24,000 RPM)	48
SM-55-5227SH	1/4" 115° Mini Angle Die Grinder	159	SM-5E-260R	Extended Die Grinder (24,000 RPM)	48
SM-55-5229	1/4" 115° Angle Die Grinder	53	SM-5E-260S	Extended Die Grinder (24,000 RPM)	48
SM-55-5300	1/4" 115° Angle Die Grinder	46	SM-5E-261N	Extended Die Grinder (24,000 RPM)	48
SM-562S	1/4" Mini Angle Die Grinder	183	SM-5E-261R	Extended Die Grinder (24,000 RPM)	48
SM-562K	1/4" Mini Die Grinder Kit	183	SM-5E-261S	Extended Die Grinder (24,000 RPM)	48

Tool Index

Model No.	Description	Page
<i>SM-5E-5200</i>	Extended Die Grinder	59
<i>SM-5E-52251</i>	1/4" Extended Die Grinder	51
<i>SM-5E-52252</i>	1/4" Extended Die Grinder	51
<i>SM-5E-5227</i>	1/4" Extended Die Grinder	53
<i>SM-5E-5229</i>	1/4" Extended Die Grinder	53
<i>SM-5E-5300</i>	1/4" Extended Die Grinder	46
<i>SM-5F-3011B</i>	1/4" Extended Die Grinder	54
<i>SM-5F-3011X</i>	1/4" Extended Die Grinder	55
<i>SM-5F-3011Y</i>	1/4" Extended Die Grinder	56
<i>SM-5F-3011Z</i>	1/4" Extended Die Grinder	57
<i>SM-5F-321C</i>	6" Vertical Grinder	62
<i>SM-5F-421C</i>	6" Vertical Grinder	62
<i>SM-5F-5100</i>	1/4" Extended Die Grinder	47
<i>SM-5G-321V</i>	7" Vertical Grinder	62
<i>SM-5G-421V</i>	7" Vertical Grinder	62
<i>SM-5G-6197</i>	7" Angle Grinder (8,500 RPM)	72
<i>SM-5G-6197W</i>	7" Air Wet Angle Sander (6,000 RPM)	74
<i>SM-5G-6198</i>	7" Angle Grinder (8,500 RPM)	72
<i>SM-5G-6413</i>	7" Angle Grinder	67
<i>SM-5G-6413R</i>	7" Angle Grinder	67
<i>SM-5G-6423</i>	7" Angle Grinder	66
<i>SM-5G-6700L</i>	7" Angle Grinder	64
<i>SM-5G-6700R</i>	7" Angle Grinder	64
<i>SM-5G-6701L</i>	7" Angle Grinder	64
<i>SM-5G-6701R</i>	7" Angle Grinder	64
<i>SM-5H-321V</i>	9" Vertical Grinder	62
<i>SM-5H-421V</i>	9" Vertical Grinder	62
<i>SM-5H-422V</i>	9" Vertical Grinder	62
<i>SM-5J-3011B</i>	3" Cut-Off Tool	54
<i>SM-5J-3011X</i>	3" Cut-Off Tool	55
<i>SM-5J-3011Y</i>	3" Cut-Off Tool	56
<i>SM-5J-3011Z</i>	3" Cut-Off Tool	57
<i>SM-5J-5100</i>	3" Cut-Off Tool	47
<i>SM-5J-5420</i>	2" Mini Cut-Off Tool	78
<i>SM-5J-5423</i>	2" Mini Angle Grinder & Cut-Off Tool	77
<i>SM-5J-5423K</i>	2" Mini Angle Grinder & Cut-Off Tool Kit	77
<i>SM-5J-8423</i>	3" Reversible Cut-Off tool	81
<i>SM-5J-8424</i>	3" Reversible Cut-Off tool	81
<i>SM-5K-3011B</i>	3" Cut-Off Tool - Long Neck	79
<i>SM-5K-3011S</i>	3" Cut-Off Tool	79
<i>SM-5K-6200</i>	3" Cut-Off Tool	78
<i>SM-5L-2011L</i>	4" Extended Cut-Off Tool	79
<i>SM-5L-3011B</i>	4" Cut-Off Tool - Long Neck	79
<i>SM-5L-3011S</i>	4" Cut-Off Tool	79
<i>SM-5L-5200</i>	4" Extended Cut-Off Tool	80
<i>SM-5M-130W</i>	Air Wet Stone Cutter (13,000 RPM)	74
<i>SM-6001-2</i>	2" Mini Disc Sander	101
<i>SM-6001-2K</i>	2" Mini Disc Sander Kit	102
<i>SM-6001-3</i>	3" Mini Disc Sander	101
<i>SM-6001-3K</i>	3" Mini Disc Sander Kit	102
<i>SM-6001K</i>	Mini Disc Sander Kit (2" & 3")	102
<i>SM-6002</i>	1/4" Mini Die Grinder	101
<i>SM-6002K</i>	1/4" Mini Die Grinder Kit	103
<i>SM-6003V-2</i>	2" Mini Orbital Sander	101
<i>SM-6003V-3</i>	3" Mini Orbital Sander	101
<i>SM-6003VK</i>	Mini Orbital Sander Kit (2" & 3")	103
<i>SM-6004</i>	3" Mini Polisher	101
<i>SM-6004K</i>	3" Mini Polisher Kit	103

Model No.	Description	Page
<i>SM-6006</i>	3" Mini Orbital Sander	101
<i>SM-6008</i>	3" Mini Polisher	101
<i>SM-603-5</i>	5" Random Orbital Sander	186
<i>SM-603-6</i>	6" Random Orbital Sander	186
<i>SM-603V-5</i>	5" Random Orbital Sander	186
<i>SM-603V-6</i>	6" Random Orbital Sander	186
<i>SM-60-7251A</i>	5" Reversible High Speed Sander	97
<i>SM-60-7253A</i>	5" Reversible High Speed Sander	97
<i>SM-60-7254A</i>	5" Reversible High Speed Sander	97
<i>SM-6102</i>	Vertical Polisher (3" & 6")	96
<i>SM-611W</i>	5" Air Wet Stone Sander / Polisher	74
<i>SM-61-5235</i>	Nib Removal Sander	84
<i>SM-61-5236</i>	Nib Removal Sander	84
<i>SM-61-6133</i>	1-1/4" Mini Random Orbital Nib Sander	84
<i>SM-61-6321-2</i>	2" Mini Disc Sander	98
<i>SM-61-6321-2K</i>	2" Mini Disc Sander Kit	99
<i>SM-61-6321-3</i>	3" Mini Disc Sander	98
<i>SM-61-6321-3K</i>	3" Mini Disc Sander Kit	99
<i>SM-61-6321K</i>	Mini Disc Sander Kit (2" & 3")	99
<i>SM-618W</i>	5" Air Wet Stone Sander / Polisher	74
<i>SM-619</i>	4" Angle Grinder	73
<i>SM-6190</i>	4-1/2" Angle Grinder & Sander	73
<i>SM-6194</i>	4-1/2" Angle Grinder	73
<i>SM-6194B</i>	4-1/2" Angle Grinder	73
<i>SM-6195</i>	5" Angle Grinder	73
<i>SM-6195A</i>	5" Angle Grinder	73
<i>SM-6195B</i>	5" Angle Grinder	73
<i>SM-619A</i>	4" Angle Grinder	73
<i>SM-6203</i>	7" Vertical Polisher	97
<i>SM-620SG</i>	20mm Belt Sander	108
<i>SM-62-6321</i>	1/4" Mini Die Grinder	98
<i>SM-62-6321K</i>	1/4" Mini Die Grinder Kit	100
<i>SM-6303</i>	7" Vertical Sander / Polisher	97
<i>SM-63-5137</i>	3" Buffer - Oil-Free	87
<i>SM-63-5237</i>	3" Buffer - Oil-Free	87
<i>SM-63-5432</i>	3" Buffer - Oil-Free	87
<i>SM-63-5437</i>	3" Buffer - Oil-Free	87
<i>SM-63-6133</i>	3" Buffer	87
<i>SM-63-6143A</i>	3" Random Orbital Palm Sander	85
<i>SM-63-6143C</i>	3" Random Orbital Palm Sander	85
<i>SM-63-6233</i>	3" Buffer	87
<i>SM-63-6243A</i>	3" Random Orbital Palm Sander	85
<i>SM-63-6243C</i>	3" Random Orbital Palm Sander	85
<i>SM-63-6321-2</i>	2" Mini Orbital Sander	98
<i>SM-63-6321-3</i>	3" Mini Orbital Sander	98
<i>SM-63-6321K</i>	Mini Orbital Sander Kit (2" & 3")	100
<i>SM-63-6432</i>	3" Buffer	87
<i>SM-63-6433</i>	3" Buffer	87
<i>SM-642W</i>	5" Air Wet Stone Sander / Polisher	74
<i>SM-645</i>	Stripping Tool	180
<i>SM-64-6321</i>	3" Mini Polisher	98
<i>SM-64-6321K</i>	3" Mini Polisher Kit	100
<i>SM-65-3271</i>	5" Angle Sander	75
<i>SM-6542</i>	2" Mini Angle Grinder	76
<i>SM-6542K</i>	2" Mini Angle Grinder Kit	76
<i>SM-65-5037</i>	5" Random Orbital Oil-Free Palm Sander	92
<i>SM-65-5037A</i>	5" Random Orbital Oil-Free Palm Sander	93
<i>SM-65-5037B</i>	5" Random Orbital Oil-Free Palm Sander	94

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-65-5037C	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6032	6" Two-Hand Sanders	89
SM-65-5132	5" Two-Hand Sanders	89	SM-66-6032A	6" Two-Hand Sanders	89
SM-65-5132A	5" Two-Hand Sanders	89	SM-66-6033	6" Random Orbital Palm Sander	90
SM-65-5137	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6033A	6" Random Orbital Palm Sander	91
SM-65-5137A	5" Random Orbital Oil-Free Palm Sander	93	SM-66-6033B	6" Random Orbital Palm Sander	94
SM-65-5137B	5" Random Orbital Oil-Free Palm Sander	94	SM-66-6033C	6" Random Orbital Palm Sander	90
SM-65-5137C	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6132	6" Two-Hand Sanders	89
SM-65-5237	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6132A	6" Two-Hand Sanders	89
SM-65-5237A	5" Random Orbital Oil-Free Palm Sander	93	SM-66-6133	6" Random Orbital Palm Sander	90
SM-65-5237B	5" Random Orbital Palm Sander	94	SM-66-6133A	6" Random Orbital Palm Sander	91
SM-65-5237C	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6133B	6" Random Orbital Palm Sander	94
SM-65-5837	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6133C	6" Random Orbital Palm Sander	90
SM-65-5837A	5" Random Orbital Oil-Free Palm Sander	93	SM-66-6233	6" Random Orbital Palm Sander	90
SM-65-5837B	5" Random Orbital Oil-Free Palm Sander	94	SM-66-6233A	6" Random Orbital Palm Sander	91
SM-65-5837C	5" Random Orbital Oil-Free Palm Sander	92	SM-66-6233B	6" Random Orbital Palm Sander	94
SM-65-6033	5" Random Orbital Palm Sander	90	SM-66-6233C	6" Random Orbital Palm Sander	90
SM-65-6033A	5" Random Orbital Palm Sander	91	SM-66-6238	6" Gear-Driven Sander/Polisher (900 RPM)	95
SM-65-6033B	5" Random Orbital Palm Sander	94	SM-66-6238A	6" Gear-Driven Sander/Polisher (900 RPM)	95
SM-65-6033C	5" Random Orbital Palm Sander	90	SM-66-6321	3" Mini Orbital Sander	98
SM-65-6132	5" Two-Hand Sanders	89	SM-66-6636G	6" Vertical Sander/Polisher	96
SM-65-6132A	5" Two-Hand Sanders	89	SM-66-6833	6" Random Orbital Palm Sander	90
SM-65-6133	5" Random Orbital Palm Sander	90	SM-66-6833A	6" Random Orbital Palm Sander	91
SM-65-6133A	5" Random Orbital Palm Sander	91	SM-66-6833B	6" Random Orbital Palm Sander	94
SM-65-6133B	5" Random Orbital Palm Sander	94	SM-66-6833C	6" Random Orbital Palm Sander	90
SM-65-6133C	5" Random Orbital Palm Sander	90	SM-671P	Low Speed Tire Buffer	58
SM-65-6233	5" Random Orbital Palm Sander	90	SM-67-6661	7" Angle Sander (4,500 RPM)	73
SM-65-6233A	5" Random Orbital Palm Sander	91	SM-680W	5" Air Wet Stone Sander / Polisher	74
SM-65-6233B	5" Random Orbital Palm Sander	94	SM-681	Air Tire Buffer	181
SM-65-6233C	5" Random Orbital Palm Sander	90	SM-682	Air Tire Buffer	181
SM-65-6238	5" Gear-Driven Sander/Polisher (900 RPM)	95	SM-683	Air Tire Buffer	181
SM-65-6636G	5" Vertical Sander/Polisher	96	SM-68-6238	8" Gear-Driven Sander/Polisher (900 RPM)	95
SM-65-6833	5" Random Orbital Palm Sander	90	SM-68-6238A	8" Gear-Driven Sander/Polisher (900 RPM)	95
SM-65-6833A	5" Random Orbital Palm Sander	91	SM-68-6321	3" Mini Polisher	98
SM-65-6833B	5" Random Orbital Palm Sander	94	SM-6902	Utility Surface Blaster (Tool Only)	42
SM-65-6833C	5" Random Orbital Palm Sander	90	SM-6902K	Utility Surface Blaster Kit	43
SM-660	5" High Speed Sander with Regulator	186	SM-6902K-7	Utility Surface Blaster Kit - 7 Pieces onto One	44
SM-661	Tire Buffer	180	SM-6903	Utility Surface Blaster (Tool Only)	42
SM-662	Tire Buffer	180	SM-6903K	Utility Surface Blaster Kit	43
SM-66-5032	6" Two-Hand Sanders	89	SM-6903KF	Utility Surface Blaster Kit	45
SM-66-5032A	6" Two-Hand Sanders	89	SM-6F-3011B	Low Speed Tire Buffer	54
SM-66-5037	6" Random Orbital Oil-Free Palm Sander	92	SM-6F-3011X	Low Speed Tire Buffer	55
SM-66-5037A	6" Random Orbital Oil-Free Palm Sander	93	SM-6F-3011Y	Low Speed Tire Buffer	56
SM-66-5037B	6" Random Orbital Oil-Free Palm Sander	94	SM-6F-3011Z	Low Speed Tire Buffer	57
SM-66-5037C	6" Random Orbital Oil-Free Palm Sander	92	SM-6F-5100	Low Speed Tire Buffer	47
SM-66-5132	6" Two-Hand Sanders	89	SM-6K-3011B	Pinstripe Removal Tool	54
SM-66-5132A	6" Two-Hand Sanders	89	SM-6K-3011X	Pinstripe Removal Tool	55
SM-66-5137	6" Random Orbital Oil-Free Palm Sander	92	SM-6K-3011Y	Pinstripe Removal Tool	56
SM-66-5137A	6" Random Orbital Oil-Free Palm Sander	93	SM-6K-3011Z	Pinstripe Removal Tool	57
SM-66-5137B	6" Random Orbital Oil-Free Palm Sander	94	SM-6K-5100	Pinstripe Removal Tool	47
SM-66-5137C	6" Random Orbital Oil-Free Palm Sander	92	SM-6N-6636	5" Vertical Sander/Polisher	96
SM-66-5237	6" Random Orbital Oil-Free Palm Sander	92	SM-6N-6661	7" Angle Polisher (2,500 RPM)	73
SM-66-5237A	6" Random Orbital Oil-Free Palm Sander	93	SM-6P-6636	6" Vertical Sander/Polisher	96
SM-66-5237B	6" Random Orbital Oil-Free Palm Sander	94	SM-6T-6200	20mm Belt Sander	108
SM-66-5237C	6" Random Orbital Oil-Free Palm Sander	92	SM-6T-6202	20mm Belt Sander - 20 mm x 520 mm	109
SM-66-5837	6" Random Orbital Oil-Free Palm Sander	92	SM-6W-6060	6mm Belt Sander	108
SM-66-5837A	6" Random Orbital Oil-Free Palm Sander	93	SM-6W-6100	10mm Belt Sander - 10 mm x 330 mm	108
SM-66-5837B	6" Random Orbital Oil-Free Palm Sander	94	SM-6W-6102	13mm Belt Sander - 13 mm x 330 mm	108
SM-66-5837C	6" Random Orbital Oil-Free Palm Sander	92	SM-6W-6120	13mm Belt Sander - 13 mm x 610 mm	108

Tool Index

Model No.	Description	Page
SM-6W-6203	10mm Belt Sander - 10 mm x 330 mm	109
SM-6X-6300	30mm Belt Sander	108
SM-6Z-6103	Belt Sander	109
SM-6Z-6103K	Belt Sander Kit	109
SM-6Z-6104	Belt Sander	110
SM-6Z-6104K	Belt Sander Kit	110
SM-6Z-6105	Versatility Belt Sander	112
SM-6Z-6201	Belt Sander	111
SM-6Z-6201K	Belt Sander Kit	111
SM-7005A-03	1/2" Air Drill (500 RPM)	144
SM-7005A-04	1/2" Air Drill (500 RPM)	145
SM-7009A-03	1/2" Air Drill (900 RPM)	144
SM-7009A-04	1/2" Air Drill (900 RPM)	145
SM-701	3/8" Air Drill (2,200 RPM)	175
SM-7017B-03	3/8" Air Drill (1,900 RPM)	146
SM-7017B-08	3/8" Air Drill (1,900 RPM)	146
SM-7017C-03	3/8" Air Drill (1,700 RPM)	147
SM-7017C-08	3/8" Air Drill (1,700 RPM)	147
SM-702	3/8" Air Drill (2,000 RPM)	176
SM-7026A-03	3/8" Air Drill (2,600 RPM)	144
SM-7026A-04	3/8" Air Drill (2,600 RPM)	145
SM-7029B-03	3/8" Air Drill (3,200 RPM)	146
SM-7029B-08	3/8" Air Drill (3,200 RPM)	146
SM-7029C-03	3/8" Air Drill (2,900 RPM)	147
SM-7029C-08	3/8" Air Drill (2,900 RPM)	147
SM-703	1/2" Air Drill (500 RPM)	175
SM-7032A-03	3/8" Air Drill (3,200 RPM)	144
SM-7032A-04	3/8" Air Drill (3,200 RPM)	145
SM-7038B-03	3/8" Air Drill (3,900 RPM)	146
SM-7038B-08	3/8" Air Drill (3,900 RPM)	146
SM-7038C-03	3/8" Air Drill (3,800 RPM)	147
SM-7038C-08	3/8" Air Drill (3,800 RPM)	147
SM-704	1/2" Reversible Air Drill (800 RPM)	175
SM-705	3/8" Reversible Air Drill (1,800 RPM)	175
SM-705SH	3/8" Reversible Drill	159
SM-706	3/8" Air Drill (2,600 RPM)	175
SM-7060A-03	3/8" Air Drill (6,000 RPM)	144
SM-7060A-04	3/8" Air Drill (6,000 RPM)	145
SM-706L	3/8" Heavy-Duty Air Drill	152
SM-709	3/8" Angle Drill (1,900 RPM)	175
SM-7091R	3/8" Reversible Angle Drill (1,200 RPM)	143
SM-709R	3/8" Reversible Angle Drill (1,800 RPM)	175
SM-710	3/8" Straight Air Drill	176
SM-712	1/2" Air Drill (400 RPM)	176
SM-7138B-03	1/4" Air Drill (3,900 RPM)	146
SM-7138B-08	1/4" Air Drill (3,900 RPM)	146
SM-7138C-03	1/4" Air Drill (3,800 RPM)	147
SM-7160A-03	1/4" Air Drill (6,000 RPM)	144
SM-7160A-04	1/4" Air Drill (6,000 RPM)	145
SM-71-7100-01	3/8" Non-Reversible Air Drill (2,200 RPM)	133
SM-71-7802	Spot Drill	149
SM-71-7802K	Spot Drill Kit	149
SM-720	3/8" Air Drill (2,600 RPM)	176
SM-721	Spot Weld Drill	149
SM-721K	Spot Weld Drill Kit	149
SM-724	1/2" Reversible Drill (800 RPM)	176
SM-725	3/8" Reversible Drill (1,800 RPM)	176
SM-72-7063-03	1/2" Non-Reversible Air Drill (1,000 RPM)	140

Model No.	Description	Page
SM-72-7253P	1/2" Non-Reversible Air Drill (1,000 RPM)	137
SM-72-7254P	1/2" Non-Reversible Air Drill (1,000 RPM)	138
SM-728	1/4" Mini Air Drill (2,800 RPM)	176
SM-7281	1/4" Mini Air Drill (2,800 RPM)	135
SM-7282	1/4" Mini Air Drill (2,800 RPM)	135
SM-7282NK	1/4" Mini Air Drill (2,800 RPM)	135
SM-7283	1/4" Mini Air Drill (2,800 RPM)	135
SM-72831-2	2" Mini Disc Sander	104
SM-72831-2K	2" Mini Disc Sander Kit	105
SM-72831-3	3" Mini Disc Sander	104
SM-72831-3K	3" Mini Disc Sander Kit	105
SM-72831K	Mini Disc Sander Kit (2" & 3")	105
SM-72832	1/4" Mini Die Grinder	104
SM-72832K	Mini Die Grinder Kit	106
SM-72833-2	2" Mini Orbital Sander	104
SM-72833-3	3" Mini Orbital Sander	104
SM-72833K	Mini Orbital Sander Kit (2" & 3")	106
SM-72834	3" Mini Polisher	104
SM-72834K	3" Mini Polisher Kit	106
SM-72835	2" Mini Grinder	104
SM-7283NK	1/4" Mini Air Drill (2,800 RPM)	135
SM-734	1/2" Reversible Air Drill (400 RPM)	175
SM-73-7063-03	1/2" Non-Reversible Air Drill (500 RPM)	140
SM-73-7100-01	1/2" Non-Reversible Air Drill (500 RPM)	133
SM-73-7251-03	1/2" Reversible Air Drill (400 RPM)	140
SM-746	3/8" Straight Air Drill	176
SM-747	Tire Buffer	180
SM-74-7251-03	1/2" Reversible Air Drill (800 RPM)	140
SM-74-7253P	1/2" Reversible Air Drill (800 RPM)	137
SM-74-7254P	1/2" Reversible Air Drill (800 RPM)	138
SM-74-7500-02	1/2" Reversible Air Drill (800 RPM)	133
SM-748	3/8" Air Drill (4,800 RPM)	175
SM-7511	3/8" Heavy Duty Air Drill (2,200 RPM)	141
SM-751P-02	3/8" Heavy Duty Air Drill (2,200 RPM)	139
SM-751P-04	3/8" Heavy Duty Air Drill (2,200 RPM)	139
SM-7531	1/2" Heavy Duty Air Drill (500 RPM)	141
SM-75-7251-03	3/8" Reversible Air Drill (1,800 RPM)	140
SM-75-7253P	3/8" Reversible Air Drill (1,800 RPM)	137
SM-75-7254P	3/8" Reversible Air Drill (1,800 RPM)	138
SM-75-7500-02	3/8" Reversible Air Drill (2,000 RPM)	133
SM-76-3011B	3/8" Straight Air Drill	54
SM-76-3011X	3/8" Straight Air Drill	55
SM-76-3011Y	3/8" Straight Air Drill	56
SM-76-3011Z	3/8" Straight Air Drill	57
SM-76-5100	3/8" Straight Air Drill	47
SM-76-7063-03	3/8" Non-Reversible Air Drill (2,600 RPM)	140
SM-76-7100-01	3/8" Non-Reversible Air Drill (2,600 RPM)	133
SM-76-7253P	3/8" Non-Reversible Air Drill (2,600 RPM)	137
SM-76-7254P	3/8" Non-Reversible Air Drill (2,600 RPM)	138
SM-77-7500-02	1/2" Reversible Air Drill (400 RPM)	133
SM-780	3/8" Straight Air Drill	181
SM-781	3/8" Straight Air Drill	181
SM-7845-02	1/2" Reversible Air Drill (350 RPM)	142
SM-786	3/8" Straight Air Drill	181
SM-78-7281R	1/4" Mini Reversible Air Drill (2,500 RPM)	135
SM-78-7284P	1/4" Non-Reversible Mini Air Drill (2,600 RPM)	136
SM-78-7284P-02	1/4" Non-Reversible Mini Air Drill (2,600 RPM)	136
SM-78-7284PR	1/4" Reversible Mini Air Drill (2,600 RPM)	136

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-78-7284PR-02	1/4" Reversible Mini Air Drill (2,600 RPM)	136	SM-83-7251	1/4" Air Screwdriver (800 RPM)	125
SM-7915	3/8" Standard Duty Air Drill (2,600 RPM)	141	SM-83-7251F	1/4" Air Screwdriver (800 RPM)	126
SM-7935	1/2" Air Drill (1,000 RPM)	141	SM-83-7253P	1/4" Air Screwdriver (800 RPM)	123
SM-7941P-02	1/2" Reversible Air Drill (800 RPM)	139	SM-83-7253PF	1/4" Air Screwdriver (800 RPM)	123
SM-7941P-04	1/2" Reversible Air Drill (800 RPM)	139	SM-83-7254P	1/4" Air Screwdriver (800 RPM)	124
SM-7942-03	1/2" Reversible Air Drill (500 RPM)	142	SM-83-7254PF	1/4" Air Screwdriver (800 RPM)	124
SM-7945-02	1/2" Reversible Air Drill (650 RPM)	142	SM-83-7500	1/4" Air Screwdriver (800 RPM)	132
SM-7951P-02	3/8" Reversible Air Drill (1,800 RPM)	139	SM-83-7500F	1/4" Air Screwdriver (800 RPM)	132
SM-7951P-04	3/8" Reversible Air Drill (1,800 RPM)	139	SM-83-8423F	1/4" Straight Air Screwdriver (800 RPM)	129
SM-7952-04	3/8" Reversible Air Drill (1,800 RPM)	142	SM-842	1/4" Air Screwdriver (1,800 RPM)	179
SM-7955	3/8" Reversible Air Drill (1,800 RPM)	141	SM-842F	1/4" Straight Air Screwdriver (1,800 RPM)	129
SM-7955-02	3/8" Reversible Air Drill (1,650 RPM)	142	SM-843	1/4" Air Screwdriver (800 RPM)	179
SM-79-8423R	3/8" Reversible Angle Drill (1,400 RPM)	143	SM-843F	1/4" Straight Air Screwdriver (800 RPM)	129
SM-7985	3/8" Heavy Duty Air Drill (4,800 RPM)	141	SM-844	1/4" Air Screwdriver (1,800 RPM)	179
SM-7A-3011B	3/8" Straight Air Drill	54	SM-846	1/4" Air Screwdriver (800 RPM)	179
SM-7A-3011X	3/8" Straight Air Drill	55	SM-84-7251	1/4" Air Screwdriver (1,800 RPM)	125
SM-7A-3011Y	3/8" Straight Air Drill	56	SM-84-7253P	1/4" Air Screwdriver (1,800 RPM)	123
SM-7A-3011Z	3/8" Straight Air Drill	57	SM-84-7254P	1/4" Air Screwdriver (1,800 RPM)	124
SM-7A-5100	3/8" Straight Air Drill	47	SM-84-7500	1/4" Air Screwdriver (1,800 RPM)	132
SM-7B-3011B	3/8" Straight Air Drill	54	SM-84-8020	1/4" Air Screwdriver (1,800 RPM)	177
SM-7B-3011X	3/8" Straight Air Drill	55	SM-84-8140	1/4" Air Screwdriver (1,800 RPM)	178
SM-7B-3011Y	3/8" Straight Air Drill	56	SM-852	1/4" Air Screwdriver (1,800 RPM)	178
SM-7B-3011Z	3/8" Straight Air Drill	57	SM-853	1/4" Air Screwdriver (800 RPM)	178
SM-7B-5100	3/8" Straight Air Drill	47	SM-85-7251	1/4" Air Screwdriver (800 RPM)	126
SM-7H-7535	Industrial Air Drill (13 mm)	153	SM-862	1/4" Air Screwdriver (1,800 RPM)	179
SM-7H-7538	Industrial Air Drill (16 mm)	153	SM-863	1/4" Air Screwdriver (800 RPM)	179
SM-7L-3011B	3/8" High Speed Straight Air Drill	54	SM-86-7251	1/4" Air Screwdriver (800 RPM)	125
SM-7L-3011X	3/8" High Speed Straight Air Drill	55	SM-86-7253P	1/4" Air Screwdriver (800 RPM)	123
SM-7L-3011Y	3/8" High Speed Straight Air Drill	56	SM-86-7254P	1/4" Air Screwdriver (800 RPM)	124
SM-7L-3011Z	3/8" High Speed Straight Air Drill	57	SM-86-7500	1/4" Air Screwdriver (800 RPM)	132
SM-7L-5100	3/8" High Speed Straight Air Drill	47	SM-872	1/4" Straight Air Screwdriver (1,800 RPM)	180
SM-802	1/4" Air Screwdriver (1,800 RPM)	177	SM-873	1/4" Straight Air Screwdriver (800 RPM)	180
SM-802K	Air Screwdriver Kit	177	SM-87-7251	1/4" Air Screwdriver (800 RPM)	126
SM-803	1/4" Air Screwdriver (800 RPM)	177	SM-882	1/4" Air Screwdriver (1,800 RPM)	180
SM-806	1/4" Air Screwdriver (800 RPM)	177	SM-883	1/4" Air Screwdriver (800 RPM)	180
SM-80-7251	1/4" Air Screwdriver (1,800 RPM)	126	SM-88-7251	1/4" Air Screwdriver (1,800 RPM)	120
SM-812	1/4" Air Screwdriver (1,800 RPM)	178	SM-88-7251WB	Wheel Bolt Cleaner Kit	151
SM-813	1/4" Air Screwdriver (800 RPM)	178	SM-88-7253P	1/4" Air Screwdriver (1,800 RPM)	121
SM-816	1/4" Air Screwdriver (800 RPM)	178	SM-88-7254P	1/4" Air Screwdriver (1,800 RPM)	121
SM-81-7251	1/4" Air Screwdriver (1,800 RPM)	126	SM-88-7500	1/4" Air Screwdriver (1,800 RPM)	131
SM-820	1/4" Air Screwdriver (2,000 RPM)	178	SM-88-8020	1/4" Air Screwdriver (1,800 RPM)	120
SM-8225	1/4" Air Screwdriver (1,800 RPM)	127	SM-88-8225	1/4" Air Screwdriver (1,800 RPM)	120
SM-8225F	1/4" Air Screwdriver (1,800 RPM)	128	SM-89-7251	1/4" Air Screwdriver (800 RPM)	120
SM-8235	1/4" Air Screwdriver (800 RPM)	127	SM-89-7253P	1/4" Air Screwdriver (800 RPM)	121
SM-8235F	1/4" Air Screwdriver (800 RPM)	128	SM-89-7254P	1/4" Air Screwdriver (800 RPM)	121
SM-8245	1/4" Air Screwdriver (1,800 RPM)	127	SM-89-7500	1/4" Air Screwdriver (800 RPM)	131
SM-8265	1/4" Air Screwdriver (800 RPM)	127	SM-89-8020	1/4" Air Screwdriver (800 RPM)	120
SM-82-7251	1/4" Air Screwdriver (1,800 RPM)	125	SM-89-8225	1/4" Air Screwdriver (800 RPM)	120
SM-82-7251F	1/4" Air Screwdriver (1,800 RPM)	126	SM-911	Double Suction Cup	192
SM-82-7253P	1/4" Air Screwdriver (1,800 RPM)	123	SM-9111	Double Suction Cup	192
SM-82-7253PF	1/4" Air Screwdriver (1,800 RPM)	123	SM-9111K	Double Suction Cup Kit with Strap	192
SM-82-7254P	1/4" Air Screwdriver (1,800 RPM)	124	SM-911K	Double Suction Cup Kit with Strap	192
SM-82-7254PF	1/4" Air Screwdriver (1,800 RPM)	124	SM-911KNH	Double Suction Cup Kit without Strap	192
SM-82-7500	1/4" Air Screwdriver (1,800 RPM)	132	SM-9825	1/4" Air Screwdriver (1,800 RPM)	128
SM-82-7500F	1/4" Air Screwdriver (1,800 RPM)	132	SM-9835	1/4" Air Screwdriver (800 RPM)	128
SM-82-8423F	1/4" Straight Air Screwdriver (1,800 RPM)	129	SM-AS002	Auto Shut-off Screwdriver (600 RPM)	119
SM-832	1/4" Air Screwdriver (1,800 RPM)	177	SM-AS002A	Auto Shut-off Screwdriver (600 RPM)	119
SM-833	1/4" Air Screwdriver (800 RPM)	177	SM-AS004	Auto Shut-off Screwdriver (600 RPM)	118

Tool Index

Model No.	Description	Page	Model No.	Description	Page
SM-AS005	Auto Shut-off Screwdriver (650 RPM)	119	SM-P612	Paving Breaker	155
SM-AS102	Auto Shut-off Screwdriver (1,000 RPM)	119	SM-P911	Paving Breaker	155
SM-AS102A	Auto Shut-off Screwdriver (1,000 RPM)	119	SM-P912	Paving Breaker	155
SM-AS104	Auto Shut-off Screwdriver (1,000 RPM)	118	SM-TH-1830	Air Chipping Hammer	165
SM-AS105	Auto Shut-off Screwdriver (1,100 RPM)	119	#0511	11mm Wire Brush (Fine)	43
SM-AS202	Auto Shut-off Screwdriver (1,800 RPM)	119	#0523	23mm Wire Brush (Fine)	43
SM-AS202A	Auto Shut-off Screwdriver (1,800 RPM)	119	#0711	11mm Wire Brush (Coarse)	43
SM-AS204	Auto Shut-off Screwdriver (1,800 RPM)	118	#0723	23mm Wire Brush (Coarse)	43
SM-AS205	Auto Shut-off Screwdriver (1,800 RPM)	119	#10012	Hex Key Wrench	104
SM-AS304	Auto Shut-off Screwdriver (2,300 RPM)	118	#10014	Hex Key Wrench	82
SM-AS305	Auto Shut-off Screwdriver (2,300 RPM)	119	#10033-11	1/2" Standard keyed chuck	133
SM-BP-0412T	Auto Shut-Off Screwdriver (400 RPM)	116	#10033-12	1/2" Standard keyless chuck	133
SM-BP-0810T	Auto Shut-Off Screwdriver (800 RPM)	116	#10033-13	1/2" Industrial keyed chuck	133
SM-BP-1008T	Auto Shut-Off Screwdriver (1,000 RPM)	116	#10033-14	1/2" Industrial keyless chuck	133
SM-BP-1305T	Auto Shut-Off Screwdriver (1,300 RPM)	116	#10035-11	3/8" Standard keyed chuck	133
SM-BP-2004T	Auto Shut-Off Screwdriver (2,000 RPM)	116	#10035-12	3/8" Standard keyless chuck	133
SM-BS-0412L	Auto Shut-Off Screwdriver (400 RPM)	117	#10035-13	3/8" Industrial keyed chuck	133
SM-BS-0412P	Auto Shut-Off Screwdriver (400 RPM)	117	#10035-14	3/8" Industrial keyless chuck	133
SM-BS-0810L	Auto Shut-Off Screwdriver (850 RPM)	117	#10455-11	Flat Chisel	168
SM-BS-0810P	Auto Shut-Off Screwdriver (850 RPM)	117	#10455-12	Flat Chisel	168
SM-BS-1008L	Auto Shut-Off Screwdriver (1,000 RPM)	117	#10455-13	Flat Chisel	168
SM-BS-1008P	Auto Shut-Off Screwdriver (1,000 RPM)	117	#32-301538-11	Standard Anvil	36
SM-BS-1405L	Auto Shut-Off Screwdriver (1,350 RPM)	117	#32-301620-11	Screwdriver Bits	37
SM-BS-1405P	Auto Shut-Off Screwdriver (1,350 RPM)	117	#32-301620-12	Screwdriver Bits	37
SM-BS-2004L	Auto Shut-Off Screwdriver (2,000 RPM)	117	#32-301621-11	Screwdriver Bits	37
SM-BS-2004P	Auto Shut-Off Screwdriver (2,000 RPM)	117	#32-301621-12	Screwdriver Bits	37
SM-CL-0426L	Auto Shut-Off Angle Nutrunner (350 RPM)	117	#32-301640-11	1/4" & 3/8" Anvil	37
SM-DH-100V	1" Chipping Hammer	154	#32-301641-11	1/4" Bit Holder	37
SM-DH-200V	2" Chipping Hammer	154	#32-301642-11	3/8" Anvil & 1/4" Bit Holder	37
SM-DH-300V	3" Chipping Hammer	154	#32-301643-11	1/4" Anvil & 1/4" Bit Holder	37
SM-DH-400V	4" Chipping Hammer	154	#33-301538-11	Standard Anvil	36
SM-DR-100V	1" Chipping Hammer	154	#33-301538-12	Wobble Anvil	36
SM-DR-200V	2" Chipping Hammer	154	#41-401255-0028	Rubber Boot	4
SM-DR-300V	3" Chipping Hammer	154	#41-402455-0028	Rubber Boot	6
SM-DR-400V	4" Chipping Hammer	154	#43-403355-0028	Rubber Boot	4
SM-EL-0207L	Auto Shut-Off Angle Nutrunner (150 RPM)	114	#43-403455-0028	Rubber Boot	6
SM-EL-0705L	Auto Shut-Off Angle Nutrunner (650 RPM)	114	#45-405165-0028	Rubber Boot	5
SM-EL-1004L	Auto Shut-Off Angle Nutrunner (950 RPM)	114	#45-405455-0028	Rubber Boot	7
SM-EL-1403L	Auto Shut-Off Angle Nutrunner (1,400 RPM)	114	#50-500228-11	Industry Standard Erickson Collet (1/4")	59
SM-EP-0205T	Auto Shut-Off Screwdriver (150 RPM)	114	#50-500228-13	Industry Standard Erickson Collet (3mm)	59
SM-EP-0705T	Auto Shut-Off Screwdriver (650 RPM)	114	#50-500228-16	Industry Standard Erickson Collet (6mm)	59
SM-EP-1005T	Auto Shut-Off Screwdriver (950 RPM)	114	#50-500228-18	Industry Standard Erickson Collet (8mm)	59
SM-EP-1404T	Auto Shut-Off Screwdriver (1,400 RPM)	114	#51224-28	8mm Collet	50
SM-ES-0205L	Auto Shut-Off Screwdriver (150 RPM)	115	#51228	Double Ended Spanner Wrench	82
SM-ES-0205P	Auto Shut-Off Screwdriver (150 RPM)	115	#51851	2-1/4" Blade (57mm)	189
SM-ES-0705L	Auto Shut-Off Screwdriver (650 RPM)	115	#51852	1-3/8" Short Blade (35mm)	189
SM-ES-0705P	Auto Shut-Off Screwdriver (650 RPM)	115	#51853	1-1/4" Curved Blade (30mm)	189
SM-ES-1005L	Auto Shut-Off Screwdriver (950 RPM)	115	#51854	3-1/2" Blade (90mm)	189
SM-ES-1005P	Auto Shut-Off Screwdriver (950 RPM)	115	#51855	3/4" Blade (18mm)	189
SM-ES-1404L	Auto Shut-Off Screwdriver (1,400 RPM)	115	#51857	1-1/2" Blade (36mm)	189
SM-ES-1404P	Auto Shut-Off Screwdriver (1,400 RPM)	115	#51858	2-1/2" Blade (63mm)	189
SM-G3-5132	3" Gear-Driven Sander / Polisher - Oil-free	88	#51859	3-1/2" Blade (90mm)	189
SM-G3-6132	3" Gear-Driven Sander/Polisher	88	#51860	5/16" Scraper Blade (8mm)	189
SM-G4-5132	4" Gear-Driven Sander / Polisher - Oil-free	88	#51861	1-3/8" Serrated Blade (35mm)	189
SM-G4-6132	4" Gear-Driven Sander/Polisher	88	#51862	1-3/8" Blade (35mm)	189
SM-G5-5132	5" Gear-Driven Sander / Polisher - Oil-free	88	#52227	Spanner Wrench	104
SM-G5-6132	5" Gear-Driven Sander/Polisher	88	#52630	3" Cutting Wheel	82
SM-P611	Paving Breaker	155	#5A-7283A40	Pin Wrench	76

Tool Index

Model No.	Description	Page
#5B-321145	Standard Side Handle	75
#5D-619256	Standard Side Handle	69
#5G-619753	Vibration Reduced Handle	69
#5J-542007	2" Cutting Wheel	77
#5L-321139	4" Cutting Wheel	75
#5M-130W35-11	Getter Blade (110 x 20 mm)	74
#5M-321139	4-1/2" Cutting Wheel	75
#5N-321139	5" Cutting Wheel	75
#600627V-31	3" Sanding Pad	96
#610227V-61	6" Sanding Pad	96
#610227V-62	6" Sanding Pad - Velcro	73
#610227V-63	6" Sanding Pad - Velcro	73
#61558-21	1/4" Air Regulator (Aluminum)	193
#619041-11	4-1/2" Plastic Pad	73
#61939	4" Grinding Wheel	75
#619539	5" Grinding Wheel	75
#619539-12	4-1/2" Grinding Wheel	75
#654248-11	Spanner Wrench	76
#66027	3" Pad	97
#66028	4" Pad	97
#66029	5" Pad	97
#66-6138A42	6" Sanding Pad	95
#68-6138A42	8" Sanding Pad	95
#6N-663131V-6	Polishing Pad - Velcro	95
#6N-663131V-8	Polishing Pad - Velcro	95
#6N-663609-11	Silencer	96
#6N-663617-11S	Silencer	96
#6N-663636-11	#80 Grit 5" White Compounding Pad - Velcro	88
#6N-663637-11	#70 Grit 5" Yellow Compounding Pad - Velcro	88
#6N-663638-11	5" Wool Polishing Pad - Velcro	96
#6N-666125V-72	7" Sanding Pad - Velcro	73
#6N-666125V-73	7" Sanding Pad - Velcro	73
#6N-666125V-82	8" Sanding Pad - Velcro	73
#6N-666125V-83	8" Sanding Pad - Velcro	73
#6N-666131	Wool Polishing Pad	73
#6N-666131V-6	Wool Polishing Pad - Velcro	73
#6N-666131V-7	Wool Polishing Pad - Velcro	73
#6N-666131V-8	Wool Polishing Pad - Velcro	73
#6N-666132	7" Plastic Pad	73
#6P-663636-11	#80 Grit Compounding Pad - Velcro	95
#6P-663637-11	#70 Grit Compounding Pad - Velcro	95
#6U-610541	Contact Arm	112
#6V-610541	Contact Arm	112
#71-780139	Tungsten Carbide Drill Bit (ø 10.3 x 47 mm)	149
#71-780140	Tungsten Carbide Drill Bit (ø 8.3 x 47 mm)	149
#71-780141	Tungsten Carbide Drill Bit (ø 6.3 x 47 mm)	149
#75-725139-11S	Side Handle	133
#75-725153-11	Muffler Material for Quiet Series	18
#75-750024-11	Torque Controller	158
#80253-103	Comfort Grip	160
#80253-105	Comfort Grip	160
#80253-108	Comfort Grip	160
#802F37-11	Red Spring (ø 3.2 mm)	124
#802F37-12	Blue Spring (ø 3.5 mm)	124
#81352-105	Comfort Grip	160
#81352-108	Comfort Grip	160
#822339-11S	Side Handle	133
#82252-108	Comfort Grip	160

Model No.	Description	Page
#H1118002-11	Flat Chisel	165
#H1118003-11	Spot Weld Bracket	165
#H1118006-11	Tail Pipe Cutter	165
#H1118013-11	Double Edge Cutter	165
#H1118025-11	Shred Metal Trimmer	165
50-500232-12S	Overhose Assembly	63
6U-6103060	Normal Abrasive Belts 13mm x 12", #60 grit	109
6U-6103080	Normal Abrasive Belts 13mm x 12", #80 grit	109
6U-6103120	Normal Abrasive Belts 13mm x 12", #120 grit	109
6U-610341	Contact Arm : 1/2" x 12" (13 mm x 305 mm)	109
6U-6103PB15	Surface Prep Belt 13mm x 12", #150 grit	109
6U-6103PB30	Surface Prep Belt 13mm x 12", #300 grit	109
6V-610341	Contact Arm : 6 mm or 13 mm x 305 mm	109
6X-6103060	Normal Abrasive Belts 6mm x 12", #60 grit	109
6X-6103080	Normal Abrasive Belts 6mm x 12", #80 grit	109
6X-6103120	Normal Abrasive Belts 6mm x 12", #120 grit	109
6X-610341	Contact Arm : 1/4" x 12" (6 mm x 305 mm)	109
6Y-610341	Contact Arm : 1/2" x 12" (13 mm x 305 mm)	109
AS000149-11	Strong Spring (ø 3.5 mm)	118
AS000149-11SUB	Cam Assembly	118
AS000149-12	Medium Spring (ø 2.8 mm)	118
AS000149-12SUB	Cam Assembly	118
AS000149-13	Light Spring (ø 2.0 mm)	118
AS000149-13SUB	Cam Assembly	118
B4-1360	Screw Cleaner (1/2" x 60L)	157
B4-2037	Screw Cleaner (M20 x 37L)	157
B4-20A02-11	Adapter to 1/2" SQ. Dr.	157
B4-2237	Screw Cleaner (M22 x 37L)	157
B4-2285	Screw Cleaner (M22 x 85L)	157
B4-2437	Screw Cleaner (M24 x 37L)	157
B4-3060	Screw Cleaner (M30 x 60L)	157
B4WSA	Wheel Bolt Cleaner Kit	157
BM-136010	Adapter for All Screw Cleaners	157
BM-136012	Spare Brush for Screw Cleaners	157
BM-203712	Spare Brush for Screw Cleaners	157
BM-203713-11	Wire Brush (M20)	151
BM-223712	Spare Brush for Screw Cleaners	157
BM-223713-11	Wire Brush (M22)	151
BM-243712	Spare Brush for Screw Cleaners	157
BM-243713-11	Wire Brush (M24)	151
BM-306012	Spare Brush for Screw Cleaners	157
BM-306013-11	Wire Brush (M30)	151
BM-306017-11	Wire Brush (M30)	151
CRA-51036	Universal Joint Chisel	163
CRA-51038	Smoothing Hammer Chisel	163
CRA-51053	3/8" Drive Air Hammer Socket Adapter	163
CRA-51056	1/2" Drive Air Hammer Socket Adapter	163
EH-43-4033SUB	Overhose Assembly	5
EH-45-4051SUB	Overhose Assembly	5
EH-47-407457-11SUB	Overhose Assembly For SM-47-4075	32
EH-512SUB	Exhaust Hose Assembly	58
EH-522SUB	Exhaust Hose Assembly	50
EH-5D-6410-11SUB	Exhaust Hose Assembly	69
EH-6133ASUB	Exhaust Hose Assembly	89
EH-6192SUB	Exhaust Hose Assembly	70
EH-6238ASUB	Exhaust Hose Assembly	95
EH-701SUB	Exhaust Hose Assembly	159
EH-701SUB-18	Exhaust Hose Assembly	75

Tool Index

Model No.	Description	Page
<i>G-102</i>	Quick Change Retainer	166
<i>G-118R</i>	Quick Change Retainer	165
<i>G-301</i>	Mini Oiler	193
<i>G4-513243-11</i>	#80 Grit 4" White Compounding Pad - Velcro	88
<i>G4-513244-11</i>	#70 Grit 4" Yellow Compounding Pad - Velcro	88
<i>G5-513257</i>	Hook	87
<i>PK-SG2618</i>	Safety Glasses	76
<i>QN-38</i>	Quick Nut (3/8"-24UNF)	69
<i>QN-58</i>	Quick Nut (5/8"-11UNC)	69
<i>QN-M14</i>	Quick Nut (M14x2.0P)	69
<i>SA-0101S</i>	Spring Retainer	162
<i>SA-0825S</i>	4 pcs File Set	191
<i>SA-12</i>	Universal Air Connectors - 1/2" NPT	193
<i>SA-14</i>	Universal Air Connectors - 1/4" NPT	193
<i>SA-2060SD</i>	#60 Grit Sanding Disc 2" Dia.	99
<i>SA-2080SD</i>	#80 Grit Sanding Disc 2" Dia.	99
<i>SA-2100SD</i>	#100 Grit Sanding Disc 2" Dia.	99
<i>SA-2100SD</i>	#100 Grit Sanding Disc 2" Dia.	105
<i>SA-2120SD</i>	#120 Grit Sanding Disc 2" Dia.	99
<i>SA-225</i>	Nylon Air Recoil Hoses (Swivel Head)	193
<i>SA-225PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-24S</i>	24 Teeth Saw Blade for SG-0822	188
<i>SA-250</i>	Nylon Air Recoil Hoses (Swivel Head)	193
<i>SA-250PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-3060SD</i>	#60 Grit Sanding Disc 3" Dia.	99
<i>SA-3080SD</i>	#80 Grit Sanding Disc 3" Dia.	99
<i>SA-3080SD</i>	#80 Grit Sanding Disc 3" Dia.	105
<i>SA-3100SD</i>	#100 Grit Sanding Disc 3" Dia.	99
<i>SA-3120SD</i>	#120 Grit Sanding Disc 3" Dia.	99
<i>SA-325</i>	Nylon Air Recoil Hoses (Swivel Head)	193
<i>SA-325PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-32S</i>	32 Teeth Saw Blade for SG-0822	188
<i>SA-350</i>	Nylon Air Recoil Hoses (Swivel Head)	193
<i>SA-350PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-38</i>	Universal Air Connectors - 3/8" NPT	193
<i>SA-430PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-450PU</i>	1/4" P.U. Air Recoil Hoses (Swivel Head)	193
<i>SA-60012P</i>	2" Sanding Backup Pad	99
<i>SA-60012SP</i>	2" Surface Prep Pad	99
<i>SA-60013P</i>	3" Sanding Backup Pad	99
<i>SA-60013SP</i>	3" Surface Prep Pad	99
<i>SA-6003V-2P</i>	2" Velcro Sanding Pad	100
<i>SA-6003V-3P</i>	3" Velcro Sanding Pad	100
<i>SA-6902BHD</i>	Adaptor for Double Black Strip Wheels	43
<i>SA-6902BHS</i>	Adaptor for Single Black Strip Wheel	43
<i>SA-6902BW</i>	Black Strip Wheel	43
<i>SA-6902RH</i>	Adaptor for Rubber Eraser or 23mm Brush	43
<i>SA-6902RW</i>	Rubber Eraser	43
<i>SA-6902RWW</i>	Water Based Paint Rubber Eraser	43
<i>SA-6902WH</i>	Adaptor for 11mm	43
<i>SA-6903RH</i>	Adaptor for Rubber Eraser or 23mm Brush	43
<i>SA-6903RW</i>	Rubber Eraser	43
<i>SA-6903RWW</i>	Water Based Paint Rubber Eraser	43
<i>SA-6903WH</i>	Adaptor for 11mm Wire Brush	43
<i>SA-6S060AB</i>	25mm x 18", #60 grit	111
<i>SA-6S080AB</i>	25mm x 18", #80 grit	111
<i>SA-6S6201</i>	Contact Arm 25mm	111
<i>SA-6T060AB</i>	20mm x 18", #60 grit	111

Model No.	Description	Page
<i>SA-6T080AB</i>	20mm x 18", #80 grit	111
<i>SA-6T080PB</i>	Surface Prep Belt 20mm x 18", #80 grit	111
<i>SA-6T6201</i>	Contact Arm 20mm	111
<i>SA-6U080AB</i>	13mm x 18", #80 grit	111
<i>SA-6U120AB</i>	13mm x 18", #120 grit	111
<i>SA-6U300PB</i>	Surface Prep Belt 13mm x 18", #300 grit	111
<i>SA-6U6201</i>	Contact Arm 13mm	111
<i>SA-6V120AB</i>	10mm x 18", #120 grit	111
<i>SA-6V150AB</i>	10mm x 18", #150 grit	111
<i>SA-6V6201</i>	Contact Arm 10mm	111
<i>SA-6W6201</i>	Contact Arm 10mm	111
<i>SA-6X150AB</i>	6mm x 18", #150 grit	111
<i>SA-6X6201</i>	Contact Arm 6mm	111
<i>SA-72835120</i>	#120 Grit 2" Grinding Wheel	76
<i>SA-7283560</i>	#60 Grit 2" Grinding Wheel	76
<i>SA-7283580</i>	#80 Grit 2" Grinding Wheel	76
<i>SA-75543VC</i>	3" Yellow Compounding Pad - Velcro	88
<i>SA-75653VC</i>	3" White Compounding Pad - Velcro	88
<i>SA-77213</i>	3-1/2" Bonnet	100
<i>SA-BM-2037-0011</i>	Screw Cleaner (M20)	151
<i>SA-BM-2237-0013</i>	Screw Cleaner (M22)	151
<i>SA-BM-2437-0015</i>	Screw Cleaner (M24)	151
<i>SA-BM-3060-0018</i>	Screw Cleaner (M30)	151
<i>SK-43-4031PM-17-1</i>	Deep Socket: 17 mm	12
<i>SK-43-4031PM-17-2</i>	Socket: 17 mm	12
<i>SK-43-4031PM-19-1</i>	Deep Socket: 19 mm	12
<i>SK-43-4031PM-19-2</i>	Socket: 19 mm	12
<i>SK-43-4031PM-21-1</i>	Deep Socket: 21 mm	12
<i>SK-43-4031PM-21-2</i>	Socket: 21 mm	12

Note

A series of horizontal dotted lines for writing notes, spanning the width of the page.

Piping System

Air mains and lines should be large enough to avoid excessive pressure loss under conditions of maximum flow.

In air lines, as in aftercoolers, water is continually precipitated as the air cools. For this reason pipe lines should be provided with a means of draining or trapping this water before it reaches the hose outlets.

It is advisable to pitch the mains in the direction of air flow so that both gravity and air flow will carry the water to traps or water legs located at frequent intervals. These should be drained regularly and never allowed to become full and inoperative. Use of automatic traps will eliminate manual draining and the possibility of traps becoming full.

However traps which drain to sewers can waste a considerable amount of air unless regularly inspected and kept in good working order.



Provision for quick and positive inspection of operation and for leakage should be made when traps are installed.

Three-way cocks or stop and waste cocks in the drains are usually provided for this purpose.

To aid in preventing condensed moisture from reaching the tools, down pipes or hose connections should never be taken directly from the bottom of air pipes or mains.

Connection should be made at the top of the main and a long radius return bend used.

Leaders, valves and hose connections should be large enough to pass the maximum amount of air required by the tool or tools on the line. This is particularly important if manifolds, from which several hose lines run, are used.

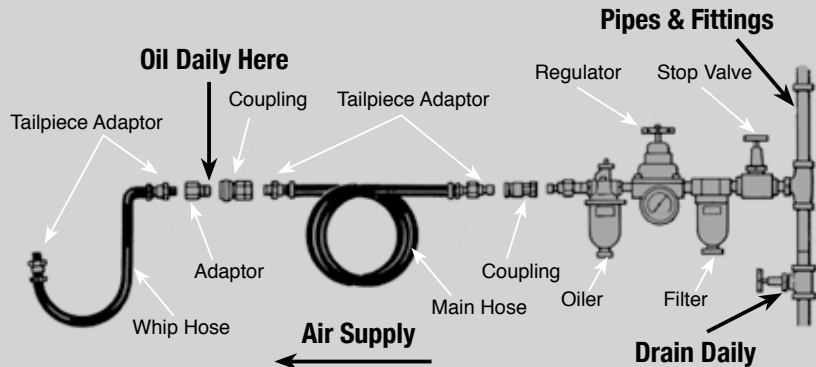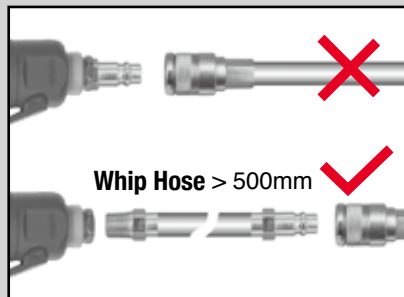

Air Regulators

Clean, dry, lubricated air at the proper pressure is the most important requirement for proper operation of air tools. SUNTECH tools are designed to operate at 90 PSI. unless otherwise specified.

Moisture Separators

On installations where the piping system does not provide clean, dry air, the use of filters at hose connection points is recommended. A good filter, kept properly drained, will remove nearly all entrained water whereas a poor one is practically useless. Most filters do not have adequate water storage capacity and, unless provided with an auxiliary storage receiver or automatic trap, soon cease to function.

Strainers

Many tools are provided with air strainers. To eliminate air restriction these strainers must be kept clean and free of obstructions. Strainers or filters should be used at each hose outlet, particularly where pipe lines are old or are used intermittently.

Lubrication

Many pneumatic tools, because of weight and space limitations, do not contain built-in lubricators. With such tools are line lubricators must always be used and their use is recommended with all air tools.

Moisture Elimination

The amount of moisture carried by compressed air varies with the temperature drops after compression, water is precipitated. In order to eliminate as much water as possible, compressors should be equipped with intercoolers, aftercoolers, and full size receivers. These should be kept drained and in good working condition.

Compressor Intake

Locate the intake to obtain the coolest, driest and cleanest air available. Intakes should be of ample size and as direct as possible. Avoid steam pipes, escaping steam and dusty or wet locations (as near roofs, floors, ground, etc...). When practical, take air from out-of-door on the north side of the building. Provide proper screening and protection. Intake filters of suitable size should be used.

One Year Limited Warranty

The manufacturer warrants this equipment to the original user against defective material or workmanship for a period of **one year** from the date of purchase on repair parts and labor. The manufacturer's responsibility under this warranty is limited to the repair or replacement of defective part or parts.

The manufacturer reserves the right to determine whether the part or parts failed because of defective material, workmanship or other causes. Failures caused by accident, alteration, misuse or improper packaging or purposely damage or attempted to repair or returned units are not covered by this warranty.

All warranty repairs must be done by SUNTECH Pneumatic Tool Service Representative or by SUNTECH factory. Any repair to the equipment other than by these authorized facilities voids this warranty. The rights under this warranty are limited to the original user and may not be transferred to subsequent owners.

SUNMATCH INDUSTRIAL CO., LTD.

ADDRESS : 296-1 Chung Shan Road, Chupei City, Hsinchu County 30281, Taiwan
PHONE : +886 (0)3 5519099 FAX : +886 (0)3 5558204 • 5552465
E-MAIL : info@sunmatch.com http://www.sunmatch.com

* Specifications and design may be changed without notice for improvement.

Printed in Taiwan 01/2019
© Copyright 2019 Sunmatch Ind. Co., Ltd.

