



Vehicle Service



REAL TOOLS FOR REAL WORK.™

Contents

04 |



Cordless IQ^V™ Tools and Accessories

Impacttools™ and Drivers
Ratchets
Drills & Screwdrivers
Other tools
Batteries and Chargers

14 |



Air Impacttools™

1/4" and 3/8"
1/2"
3/4"
1" (pistol and rear handle)
Accessories

34 |



Air Ratchets

1/2"
3/8"
1/4"

40 |



Air Grinders

Die Grinders
Wheel Grinders

44 |



Air Finishing Tools

Air Sanders and Polishers
Pads, Disks and Bonnets

52 |



Air Hammers and Accessories

Air Hammer
Needle Scaler
Accessoires

56 |



Air Drills, Screwdrivers and Specialty tools

Drills
Screwdrivers
Specialty Air Tools

64 |



Accessories

Couplings & Nipples
Hoses
Lubricants



**The new IQ^V series are power tools
how you want them – As powerful as
air tools, the convenience of cordless.**

Cordless IQ^V™ Tools and Accessories

- 06 | Impacttools™ and Drivers
- 09 | Ratchets
- 10 | Drills & Screwdrivers
- 11 | Other tools
- 12 | Batteries and Chargers

IQ^V Series WARRANTY

IQ^V Series includes IQ^{V20} and IQ^{V12}

3 Year Limited Warranty on Tools and Chargers	2 Year High-Capacity Battery Replacement	1 Year Tool, Battery & Charger Replacement
--	--	---

See Ingersollrandproducts.com/cordless for official Terms & Conditions. May vary by country.

Peter Mayrhofer isn't one to compromise between comfort and performance. He wants it all in one compact tool. The new IQ^V™ line lets him have it his way: The cordless Impacttools™ can remove even the toughest bolts. They deliver all the power he needs, with the handling and accessibility he expects.

Peter Mayrhofer, Inzell

Cordless IQV™ Tools and Accessories



W5152

1/2" ■ Tool only - 20 V



- 500 Nm of maximum reverse torque and 750 Nm of nut-busting torque
- IQV Power Control System with 4 modes Max Power, Mid Power, Wrench Tight, and Hand Tight
- IQV brushless motor technology
- Shadowless task light

Also available

W5132

3/8" Tool only - 20 V

Available in kits

W5152-K22-EU 1/2" Kit
CCN: 47547020001

W5132-K22-EU 3/8" Kit
CCN: 47547011001



1/2" Drive Impactool, Charger 12/20 V, BL2012 (2.5 Ah), BL2022 (5.0 Ah) Li-Ion Batteries & Bag

Protection Boot

W5132-BOOT

CCN: 47543902001

Ref.	CCN	Battery	V	in	Nm	rpm	bpm	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
W5152	47545086001	BL2022, BL2012	20	½" □	500	2,100	3,300	2.30	170	90.0	11.3/2.6
W5132	47543902001	BL2022, BL2012	20	⅜" □	500	2,100	3,300	2.30	166	90.0	11.3/2.6

⁽¹⁾ Weight to include tool + battery BL2022 weights. Weights are 2.1kg with battery BL2012.

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^{VTM} Tools and Accessories | ImpactoolsTM and Drivers

W7150EU

1/2" ■ Tool only - 20 V



- 1,057 Nm of maximum torque and 1,486 Nm of nut-busting torque, that's best-in-class performance
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool

Protection Boot
W7150-BOOT
CCN: 48391692

Available in kits

W7150EU-K2 1/2" Kit 3.0 Ah
CCN: 48391734IRI

W7150EU-K22 1/2" Kit 5.0 Ah
CCN: 47524963001



1/2" Drive Impactool, Charger 12/20 V, 2 BL2010 (3.0 Ah) Li-Ion Batteries & Case

W5111

1/4" ⚙️ Tool only - 20 V



- 260 Nm of maximum torque in reverse
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool

Protection Boot
W5111-BOOT
CCN: 48620793

Available in kits

W5111-K22-EU 1/4"Hex Kit
CCN: 47530971001



1/4" Hex Impact Driver, Charger 12/20 V, 2 BL2012 (2.5 Ah) Li-Ion Batteries & Case

W5350

1/2" ■ Tool only - 20 V



- 245 Nm of maximum torque
- Variable speed switch with electronic brake provides maximum control of the tool
- No torque reaction

Also available
W5330
3/8" Tool only - 20 V

Protection Boot
W5330-BOOT
CCN: 47514540001

Available in kits

W5350-K12-EU 1/2" Kit
CCN: 47530981001

W5330-K12-EU 3/8" Kit
CCN: 47530980001



1/2" Drive Impactool, Charger 12/20 V, 1 BL2012 (2.5 Ah) Li-Ion Battery & Case


Ref.	CCN	Battery	V	in	Nm	rpm	bpm	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
W7150EU	48391692	BL2022, BL2010	20	1/2" □	1,057	1,900	2,300	3.10	238	89.0	12.2/1.8
W5111	48620793	BL2012	20	1/4" ⚙️	240	1,900	2,800	1.60	154	86.0	4.7/1.2
W5350	47514541001	BL2012	20	1/2" □	245	1,900	3,000	2.06	439	85.0	10.3/6.3
W5330	47514540001	BL2012	20	3/8" □	245	1,900	3,000	2.06	439	85.0	10.3/6.3

⁽¹⁾ Weight to include tool + battery weights

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^V™ Tools and Accessories | Impactools™ and Drivers

W1110

1/4"  Tool only - 12 V



- 135 Nm of maximum torque
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool


Available in kits

W1110EU-K2 1/4" Hex Kit
CCN: 47500087001



1/4" Hex Impact Driver, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

W1120

1/4"  Tool only - 12 V



- 135 Nm of maximum torque
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool


Available in kits

W1120EU-K2 1/4" Kit
CCN: 47500088001



1/4" Drive Impactool, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

W1130

3/8"  Tool only - 12 V






- 135 Nm of maximum torque
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool

Available in kits

W1130EU-K2 3/8" Kit
CCN: 47500089001



3/8" Drive Impactool, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

Ref.	CCN	Battery	V	in	Nm	rpm	bpm	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
W1110	47500078001	BL1203	12	1/4" 	135	1,900	3,300	1.05	150	82.0	4.5/3.0
W1120	47500081001	BL1203	12	1/4" 	135	2,700	3,300	1.04	150	82.0	3.8/2.7
W1130	47500084001	BL1203	12	3/8" 	135	2,700	3,300	1.04	150	82.0	3.8/2.7

⁽¹⁾ Weight to include tool + battery weights

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^{VTM} Tools and Accessories | Ratchets

R3130

3/8" ■ Tool only - 20 V



- 73 Nm of maximum torque
- 0-225 rpm free speed
- Variable-speed trigger allows easy starts and precise speed control

Available in kits

R3130-K12-EU 3/8" Kit
CCN: 47530966001



3/8" Drive Ratchet, Charger 12/20 V,
1 BL2012 (2.5 Ah) Li-Ion Battery & Case

R3150

1/2" ■ Tool only - 20 V



- 73 Nm of maximum torque
- 0-225 rpm free speed
- Variable-speed trigger allows easy starts and precise speed control

Available in kits

R3150-K12-EU 1/2" Kit
CCN: 47530968001



1/2" Drive Ratchet, Charger 12/20 V,
1 BL2012 (2.5 Ah) Li-Ion Battery & Case

R1130

3/8" ■ Tool only - 12 V



- 40 Nm of maximum torque
- 0-260 rpm free speed
- Variable-speed trigger allows easy starts and precise speed control
- Bright white LED

Also available

R1120
1/4" Tool only - 12 V

Available in kits

R1130EU-K1 3/8" Kit
CCN: 47500065001
R1120EU-K1 1/4" Kit
CCN: 47500064001



3/8" Ratchet, Charger,
1 BL1203 (2.0 Ah) Li-Ion Battery

Ref.	CCN	Battery	V	in	Nm	rpm	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
R3130	48621023	BL2012	20	3/8" □	73	225	2.00	408	86.0	2.8/0.7
R3150	48621056	BL2012	20	1/2" □	73	225	2.00	408	86.0	2.8/0.7
R1130	47500062001	BL1203	12	3/8" □	40	260	0.98	280	76.0	< 2.5
R1120	47500060001	BL1202	20	1/4" □	73	225	0.98	408	86.0	2.8/0.7

⁽¹⁾ Weight to include tool + battery weights

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^{VTM} Tools and Accessories | Drills & Screwdrivers

D5140

Tool only - 20 V



- 80 Nm of maximum torque
- Keyless chuck
- Variable speed switch with electronic brake provides maximum control of the tool
- Steel-reinforced housings add strength for unmatched drop resistance

Available in kits

D5140-K22-EU Kit 5.0 Ah
CCN: 47530987001

D5140-K2-EU Kit 3.0 Ah
CCN: 48498497



1/2" (13mm) Drill/Driver, Charger 12/20 V,
2 BL2022 (5.0 Ah) Li-Ion Batteries & Case

D1130

Tool only - 12 V



- 23 Nm of maximum torque
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool

Available in kits

D1130EU-K2 Kit
CCN: 47500116001



1/4" (6.5 mm) Drill/Driver, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

D1410

Tool only - 12 V



- 23 Nm of maximum torque
- Steel-reinforced housings add strength for unmatched drop resistance
- Variable speed switch with electronic brake provides maximum control of the tool

Available in kits

D1410EU-K2 Kit
CCN: 47500117001



1/4" Hex Screwdriver, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

Ref.	CCN	Battery	V	rpm	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
D5140	48489546	BL2022, BL2010	20	1,900	2.45	245	75.0	< 2.5
D1130	47500112001	BL1203	12	1,600	1.10	190	64.0	< 2.5
D1410	47500114001	BL1203	12	1,600	0.95	130	64.0	< 2.5

⁽¹⁾ Weight to include tool + battery weights

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^V™ Tools and Accessories | Other tools

LUB5130

Tool only - 20 V



- Cordless Grease Gun
- Pressure 431 bar (6,250 psi)
- Flowrate 75 g/min
- Grease capacity 400 g
- 3 way loading: bulk, cartridge and manual
- Flexible hose 762 mm

Available in kits

LUB5130-K12-EU Kit
CCN: 47503151001



20 V Grease Gun, Charger 12/20 V,
1 BL2012 (2.5 Ah) Li-Ion Battery & Case

G1621

Tool only - 12 V



- Cordless Sander/Polisher
- 2" (50 mm) and 3" (75 mm) pads
- 2-speed gearbox, quick change spindle-lock and variable-speed for use on multiple surfaces
- Low noise level

Available in kits

G1621EU-K2 Kit
CCN: 47540140001



12 V Sander/Polisher, Charger,
2 BL1203 (2.0 Ah) Li-Ion Batteries

L5110

Tool only - 20 V



- Ultra-bright white LED casts 180 lumens
- Compatible with all IQV20 batteries
- Multi-position head, standing base and hang hook allow for lighting from above or below at any angle
- Run time:
12.5 hours (BL2012)/
15 hours (BL2010)/
22 hours (BL2022)

Also available

L1110
Tool only - 12 V

Ref.	CCN	Battery	V	rpm	HH:MM	Lumens	kg	mm	dB(A)	m/s ² /K ⁽¹⁾
LUB5130	47503006	BL2022, BL2012	20	-	-	-	3.70	490	66.0	2.5
G1621	47542795001	BL1203	12	2,200	0:20	-	1.30	144	67.0	3.0/0.8
L5110	48489561	BL2012	20	-	12:50	180	0.86	236	-	-
L1110	47500109001	BL1203	12	-	6:50	180	0.58	217	-	-

⁽¹⁾ Weight to include tool + battery weights

⁽²⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Cordless IQ^V™ Tools and Accessories | Batteries and Chargers

BL1203

12 V - 2.0 Ah Li-Ion



- Performance - Each battery provides 2.0 Ah of 12 V power, intelligently managed by the IQV12 Series system for maximum tool runtime
- Durability - Positive-lock system emits highly audible click when properly secured in tool, helping to eliminate drops and damage
- Ergonomics - Fuel gauge and patent-pending dual side button design for easier battery installation

BL2012

20 V - 2.5 Ah, Li-Ion



- Performance: The BL2012 x2.5 delivers 100% longer run time than its predecessor at the same size and weight.
- Ergonomic: patent-pending dual side button designed for easier battery installation.
- Durability: The intelligent Battery Management System (BMS) allows the battery to communicate with the tool and charger to offer triple battery protection, prevent over loading, over charging and over discharging for longer tool and battery life.

Protection Boot

BL2005-BOOT

CCN: 47515903001

BL2010

20 V - 3.0 Ah, Li-Ion



- Performance: The BL2010 x3.0, extended-life 20-volt lithium-ion battery delivers high-charge capacity and low internal impedance for maximum power delivery and exceptional runtime.
- Ergonomic: patent-pending dual side button designed for easier battery installation.
- Durability: The intelligent Battery Management System (BMS) allows the battery to communicate with the tool and charger to offer triple battery protection, prevent over loading, over charging and over discharging for longer tool and battery life.

Protection Boot

BL2010-BOOT

CCN: 48386791

Ref.	CCN	 V	 kg
BL1203	24206179	12	0.25
BL2012	47515903001	20	0.41
BL2010	48386791	20	0.72

Cordless IQ^V™ Tools and Accessories | Batteries and Chargers

BL2022

20 V - 5.0 Ah, Li-Ion



- Performance: The BL2022 x5.0 delivers 68% longer run time than its predecessor at the same size and weight.
- Ergonomic: patent-pending dual side button designed for easier battery installation.
- Durability: The intelligent Battery Management System (BMS) allows the battery to communicate with the tool and charger to offer triple battery protection, prevent over loading, over charging and over discharging for longer tool and battery life.

Protection Boot

BL2010-BOOT

CCN: 48386791

BC1110-EU

Charger 12 V batteries





- Performance: Brings fully depleted battery to 100% charge in about an hour
- Durability: Engineered composite housing withstands wear, abrasions, drops, and can be securely screw mounted to a wall or toolbox

BC1121-EU

Charger 12/20 V batteries



- Versatility: One charger for all your Ingersoll Rand batteries, fully compatible with all existing 20 V and 12 V batteries and that can charge USB mobile devices
- Durability: Engineered composite housing withstands wear, abrasions, drops, and can be securely screw mounted to a wall or toolbox

Ref.	CCN	 V	 kg
BL2022	47515902001	20	0.72
BC1110-EU	47499973001	12	-
BC1121-EU	47507874001	12/20	-



Even though you never know what challenge the day will bring, one thing is certain – the Impactool™ range has the power to answer it.



Air Impactools™

- 16 | 1/4" and 3/8"
- 20 | 1/2"
- 24 | 3/4"
- 26 | 1" (pistol and rear handle)
- 30 | Accessories

Torque is key to Jose dos Santos. With Ingersoll Rands industry-leading range of Air Impactools™ he has all the power he needs at his fingertips. After having tested them, the tools have proven to deliver more performance than he was expecting. And the wide range of sizes offers him the perfect match for his workplace.

Jose dos Santos, Bilbao

Air Impacttools™



2101XPA 1/4" Ring type



- Powerful impact mechanism delivers 75 Nm of max torque
- Hard-hitting five-vane motor for smooth and robust performance
- Easily accessible forward/reverse switch for one-handed operation
- Ideal for those hard-to-reach places where conventional tools can't go

Also available
2102XPA
 3/8" Ring type
2101XPA-QC
 1/4" Hex Quick change

Available in kits

2101KA
 CCN: 47520766001



Includes 1/4" impact and 10 sockets set

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2101XPA	47520745001	1/4" □	75	75	14,500	3,650	0.70	175	1/4 NPT	10	4.7	-	84.8	3.0/1.0
2102XPA	47520747001	3/8" □	75	75	14,500	3,650	0.70	175	1/4 NPT	10	4.7	-	84.8	3.0/1.0
2101XPA-QC	47520746001	1/4" □	75	75	14,500	3,650	0.70	183	1/4 NPT	10	4.7	-	84.8	3.0/1.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.
 Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/4" and 3/8"

2115QTiMAX

3/8" ■ Ring type



- 407 Nm of maximum torque in reverse
- Only 1.13 kg and 151 mm
- Twin-hammer impact mechanism
- Titanium hammer case and composite housing
- 4-position power regulator
- 1-hand forward and reverse switch
- Two-year warranty

Protection Boot

2115M-BOOT

CCN: 45587326

15QMAX

3/8" ■ Ring type



- Delivering 520 Nm of maximum reverse torque at only 1.09 kg
- Push buttons for one-hand forward/reverse
- 3-mode selection power regulator
- 117 mm length
- Quiet Tool
- Two-year warranty

Protection Boot

35-BOOT

CCN: 47544405001

2015MAX

3/8" ■ Ring type



- 244 Nm of maximum torque in reverse
- Only 1.54 kg
- Jumbo-hammer impact mechanism
- Composite housing
- 2-position power regulator

Protection Boot

2015-BOOT

CCN: 45533775

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2115QTiMAX	45587326	3/8" □	407	312	1,500	1,500	1.13	151	1/4 NPT	10	1.9	8.00	93.2	7.5/1.8
15QMAX	47544405001	3/8" □	520	420	6,000	1,350	1.09	117	1/4 NPT	10	1.9	8.02	89.7	5.5/0.9
2015MAX	45533775	3/8" □	244	190	7,100	2,100	1.54	332	1/4 NPT	10	1.6	9.00	96.6	17.4/3.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/4" and 3/8"

211
3/8" ■ Ring type



- 204 Nm of maximum torque in reverse
- Only 1.09 kg
- Jumbo-hammer impact mechanism
- 5-position power regulator

212
3/8" ■ Ring type



- 244 Nm of maximum torque in reverse
- Pressure-feed lubrication system automatically greases the impact mechanism for increased durability and reliability
- Wide range of power regulator settings helps adjusting the power to the application

216B
3/8" ■ Ring type



- 271 Nm of maximum torque in reverse
- Only 1.27 kg
- Ball & cam impact mechanism
- Power regulator

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
211	01197060	3/8" □	204	170	1,000	1,500	1.09	168	1/4 NPT	10	1.2	5.20	104.0	5.9/1.6
212	01197003	3/8" □	244	170	1,000	1,500	1.31	152	1/4 NPT	10	1.2	5.20	97.5	6.5/1.0
216B	46806600	3/8" □	271	217	8,500	1,600	1.27	196	1/4 NPT	10	1.4	9.00	90.0	5.2/1.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.
Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/4" and 3/8"

LA158

3/8" ■ Ring type



- 136 Nm of maximum torque in reverse
- Small size to allow greater access to tight spaces
- Easy glide forward/reverse switch
- Wide range of power regulator settings helps adjusting the power to the application

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
LA158	49825870	3/8" □	136	100	1,000	1,400	1.25	137	1/4 NPT	10	1.9	7.50	88.4	3.3/1.1

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™



35MAX 1/2" ■ Ring type



- Delivering 610 Nm of maximum reverse torque and 750 Nm of nut busting torque at only 1.09 kg
- Push buttons for one-hand forward/reverse
- 3-mode selection power regulator
- 117 mm length
- Twin Hammer mechanism for low vibrations
- Two-year warranty

Protection Boot

35-BOOT
CCN: 47544404001

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
35MAX	47544404001	1/2" □	610	490	8,000	1,250	1.09	117	1/4 NPT	10	1.9	8.02	95.9	6.4/1.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/2"

2235QTiMAX

1/2" ■ Ring type



- MAX POWER with 1,220 Nm of maximum torque in reverse and 1,760 Nm of nut busting torque
- MAX DURABILITY with the titanium hammercase, the steel-wear plate and composite housing
- MAX RELIABILITY backed by a two-year warranty

Also available

2235QTiMAX-2

Protection Boot

2235M-BOOT

CCN: 47517574001

Available in kits

2235QTiMAX-10SK 10 sockets kit

CCN: 47521865001

2235QTiMAX-3SK 3 long sockets kit

CCN: 47521867001



2235QTiMAX + Impact Sockets 1/2"
(10, 11, 12, 13, 14, 17, 19, 21, 22, and 24 mm)

2125QTiMAX

1/2" ■ Ring type



- 450 Nm of maximum torque in reverse
- Only 1.14 kg and 155 mm
- Twin-hammer impact mechanism
- Titanium hammer case and composite housing
- 1-hand forward and reverse switch
- Two-year warranty

Protection Boot

2115M-BOOT

CCN: 45587326

2025MAX

1/2" ■ Ring type



- 244 Nm of maximum torque in reverse
- Only 1.54 kg
- Jumbo-hammer impact mechanism
- Composite housing
- 2-position power regulator

Protection Boot

2015-BOOT

CCN: 45533775

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2235QTiMAX	47517574001	1/2" □	1,220	-	8,500	1,220	2.10	193	1/4 NPT	10	-	11.30	91.9	9.0/2.8
2235QTiMAX-2	47517884001	1/2" □	1,220	-	8,500	1,220	2.20	244	1/4 NPT	10	-	11.00	91.9	7.7/2.7
2125QTiMAX	45587524	1/2" □	450	340	1,500	1,500	1.14	155	1/4 NPT	10	1.9	8.00	93.2	7.5/1.8
2025MAX	47099247	1/2" □	244	190	7,100	1,500	1.54	332	1/4 NPT	10	1.7	9.00	96.6	17.4/3.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/2"

2235QXPA

1/2" ■ Ring type



- 1,220 Nm of maximum torque in reverse and 1,760 Nm of nut-busting torque
- Quiet technology
- Only 2,1 kg

Protection Boot

2235QXPA-BOOT

CCN: 47532836001

2135QXPA

1/2" ■ Ring type



- 1,057 Nm of maximum torque in reverse and 1,490 Nm of nut busting torque
- Quiet technology
- Only 1.80 kg
- 4-position power regulator and 1-hand forward and reverse switch

Also available

2135QXPA-2

Ring type, long anvil 50 mm

Protection Boot

2135M-BOOT

CCN: 47517913001

Available in kits

2135QXPA-10SK 10 sockets kit

CCN: 47521891001

2135QXPA-3SK 3 long sockets kit

CCN: 47521896001



2135QXPA + Impact Sockets 1/2"
(10, 11, 12, 13, 14, 17, 19, 21, 22, and 24 mm)

2130XP

1/2" ■ Ring type



- 816 Nm maximum torque in reverse
- Ergonomic composite housing is light-weight, protects from cold air, and offers great operator comfort
- Full-stroke tease throttle
- Multi-position power management and easy glide forward/reverse switch

Also available

2130XP-TL

1/2" Ring type / Torque Limited at 75 Nm

Protection Boot

2130-BOOT

CCN: 80136112

Available in kits

2130XP+SK4M3L 3 long sockets kit

CCN: 17021346

2130XP-K 10 sockets kit

CCN: 16985301



2130XP + Long Impact Sockets, insulated, thin-wall 1/2" (17, 19, and 21 mm)

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2235QXPA	47532836001	1/2" □	1,220	-	8,500	1,220	2.10	193	1/4 NPT	10	0.0	11.30	91.9	9.0/2.8
2135QXPA	47517913001	1/2" □	1,057	746	9,800	1,250	1.80	187	1/4 NPT	10	0.0	10.80	90.7	13.3/4.6
2135QXPA-2	47517914001	1/2" □	1,057	746	9,800	1,250	1.90	241	1/4 NPT	10	0.0	10.80	90.7	9.7/1.8
2130XP	80136112	1/2" □	816	474	9,500	1,200	1.90	187	1/4 NPT	10	2.1	10.40	94.3	8.9/2.0
2130XP-TL	46812251	1/2" □	816	75	7,800	1,150	1.90	187	1/4 NPT	10	2.1	14.20	94.4	10.0/1.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1/2"

231GXP

1/2" ■ Ring type



- 610 Nm
- Twin-hammer impact mechanism
- Steel hammer case
- 5-position power regulator

Protection Boot

231-BOOT

CCN: 10566255

Available in kits

231GXP-K 10 sockets kit

CCN: 17000639



231GXP + Impact Sockets 1/2"
(10, 11, 12, 13, 14, 17, 19, 21, 22, and 24 mm)

236

1/2" ■ Ring type



- 610 Nm of maximum torque in reverse
- Pressure-fed lubrication
- Feather-touch trigger allows precise delivery of power and speed

Protection Boot

236-BOOT

CCN: 80171879

Available in kits

236-SK 10 sockets kit

CCN: 17020843



236 + Impact Sockets 1/2"
(10, 11, 12, 13, 14, 17, 19, 21, 22, and 24 mm)

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
231GXP	10566255	1/2" □	610	407	8,000	1,200	2.63	185	1/4 NPT	10	2.0	10.30	91.5	6.3/2.1
236	80171879	1/2" □	610	271	7,400	1,200	2.40	180	1/4 NPT	10	2.0	11.30	90.3	12.0/1.0

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.
Performance at 6.2 bar (90 psi)

Air Impacttools™



2145QiMAX 3/4" ■ Short anvil



- 1,830 Nm of maximum torque in reverse
- Ergonomic composite housing is lightweight, protects from cold air and offers great operator comfort
- The low weight of this tool will reduce operator fatigue
- 360° swivel inlet helps eliminate twisted hoses
- Two-year warranty

Protection Boot
2145M-BOOT
CCN: 45624327

Also available
2145QiMAX-3
Long anvil 75 mm
2145QiMAX-6
Long anvil 150 mm

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2145QiMAX	45624327	3/4" □	1,830	1,220	6,300	1,150	3.35	217	3/8 NPT	13	4.0	15.10	96.3	8.7/2.7
2145QiMAX-3	47119524	3/4" □	1,830	1,220	6,300	1,150	3.79	293	3/8 NPT	13	4.0	15.10	96.3	8.1/1.2
2145QiMAX-6	47121454	3/4" □	1,830	1,220	6,300	1,150	4.23	369	3/8 NPT	13	4.0	15.10	96.3	8.1/1.2

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.
Performance at 6.2 bar (90 psi)

Air Impacttools™ | 3/4"

2161XP

3/4" ■ Short anvil



- 1,695 Nm
- Only 5.4 kg (2161XP)
- Twin-hammer impact mechanism
- Steel hammer case
- 3-position power regulator

Also available

2161XP-6

Long anvil 150 mm

Protection Boot

2161-BOOT

CCN: 01372085

261

3/4" ■ Short anvil



- 1,491 Nm
- Jumbo-hammer impact mechanism
- Steel hammer case
- 5-position power regulator

Also available

261-3

Long anvil 75 mm

261-6

Long anvil 150 mm

Protection Boot

261-BOOT

CCN: 01209758

259

3/4" ■ Short anvil



- 1,424 Nm
- Only 4.0 kg and 218 mm
- Swinging-hammer impact mechanism
- 2-position power regulator

Protection Boot

259-BOOT

CCN: 45631918

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2161XP	01372085	3/4" □	1,695	1,356	6,000	1,025	5.35	216	3/8 NPT	13	4.7	21.50	94.7	9.8/1.8
2161XP-6	01372093	3/4" □	1,695	1,356	6,000	1,025	5.94	370	3/8 NPT	13	4.7	21.50	94.7	9.8/1.8
261	01209758	3/4" □	1,491	813	5,500	1,000	5.62	224	3/8 NPT	13	4.5	17.90	98.1	10.4/1.3
261-3	01211101	3/4" □	1,491	813	5,500	1,000	5.90	300	3/8 NPT	13	4.5	17.90	98.1	10.4/1.3
261-6	01217199	3/4" □	1,491	813	5,500	1,000	6.21	376	3/8 NPT	13	4.5	17.90	98.1	10.4/1.3
259	45631918	3/4" □	1,424	1,085	6,500	1,000	4.00	218	3/8 NPT	10	3.8	14.20	91.6	6.4/0.8

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty. Performance at 6.2 bar (90 psi)

Air Impacttools™



285B-6

1" ■ Long anvil 150 mm



- Designed for operation at 8.3 bar dynamic (120 psi)
- 2,400 Nm
- Swinging-hammer impact mechanism
- 3-position power regulator

Also available

285B
1" Short anvil


Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
285B-6	80157233	1" □	2,400	1,220	5,000	700	12.60	519	1/2 NPT	13	4.7	17.50	99.8	9.0/2.7
285B	80157209	1" □	2,400	1,220	5,000	700	11.20	360	1/2 NPT	13	4.7	17.50	99.8	8.0/1.2

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.
Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1" (pistol and rear angle)

631L

1" ■ Long anvil 200 mm

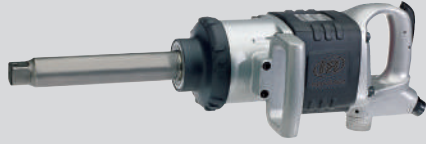

- 4,300 Nm of maximum torque
- Ergonomic auxiliary handle provides excellent manoeuvrability
- 4-position power regulator and forward/reverse control

280-6-EU

1" ■ Long anvil 150 mm



- 2,169 Nm
- Jumbo-hammer impact mechanism

Also available

280-EU

1" Short anvil

2190Ti-6

1" ■ Long anvil 150 mm, ergonomic chainsaw-type handle



- 2,237 Nm
- Only 6.13 kg (2190Ti)
- Twin-hammer impact mechanism
- Titanium hammer case
- 3-position power regulator

Also available

2190DTi-6

150 mm anvil, rear handle

2190Ti

Short anvil, ergonomic chainsaw-type handle

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
631L	80183171	1" □	4,300	3,390	3,500	700	16.60	624	1/2 NPT	13	7.1	26.40	108.4	12.7/2.5
280-6-EU	01343144	1" □	2,169	1,356	6,000	750	10.80	470	1/2 NPT	13	4.7	26.00	109.1	21.8/3.8
280-EU	01343193	1" □	2,169	1,356	6,000	750	9.98	330	1/2 NPT	13	4.7	26.00	109.1	24.1/3.4
2190Ti-6	01390467	1" □	2,237	1,356	6,800	875	7.04	522	1/2 NPT	13	5.6	27.40	103.8	12.7/2.9
2190DTi-6	01390475	1" □	2,237	1,356	6,800	875	7.26	475	1/2 NPT	13	5.6	27.40	103.8	8.7/2.1
2190Ti	01390459	1" □	2,237	1,356	6,800	875	6.13	393	1/2 NPT	13	5.6	27.40	103.8	10.4/1.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1" (pistol and rear angle)

295A

1" ■ Short anvil



- Designed for operation at 8.3 bar dynamic (120 psi)
- 2,400 Nm
- Swinging-hammer impact mechanism
- 3-position power regulator

Also available

295A-6

Long anvil 150 mm

Protection Boot

295-BOOT

CCN: 80159015

2171XP

1" ■ Short anvil



- 1,695 Nm
- Only 5.47 kg (2171XP)
- Twin-hammer impact mechanism
- Steel hammer case
- 3-position power regulator

Also available

2171XP-6

Long anvil 150 mm

Protection Boot

2161-BOOT

CCN: 01372085

2155QiMAX

1" ■ Short anvil



- 1,830 Nm of maximum torque in reverse
- Ergonomic composite housing is lightweight, protects from cold air and offers great operator comfort
- The low weight of this tool will reduce operator fatigue
- 360° swivel inlet helps eliminating twisted hoses
- Two-year warranty

Protection Boot

2145M-BOOT

CCN: 47123450

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
295A	80159015	1" □	2,400	1,220	5,000	700	9.98	290	1/2 NPT	13	4.7	17.50	97.0	8.6/1.0
295A-6	16578734	1" □	2,400	1,220	5,000	700	11.40	449	1/2 NPT	13	4.7	17.50	97.0	9.1/2.9
2171XP	01378165	1" □	1,695	1,356	6,000	1,025	5.47	226	3/8 NPT	13	4.7	21.50	94.7	10.3/1.3
2171XP-6	16619801	1" □	1,695	1,356	6,000	1,025	6.76	360	3/8 NPT	13	4.7	21.50	94.7	9.9/3.0
2155QiMAX	47123450	1" □	1,830	1,220	6,300	1,150	3.36	225	3/8 NPT	13	4.0	15.10	96.3	8.7/2.7

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty. Performance at 6.2 bar (90 psi)

Air Impacttools™ | 1" (pistol and rear angle)

271

1" ■ Short anvil



- 1,491 Nm
- Jumbo-hammer impact mechanism
- Steel hammer case
- 5-position power regulator

Ref.	CCN	in	Nm	Nm	rpm	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
271	01209766	1" □	1,491	1,224	5,500	1,000	5.67	226	3/8 NPT	13	4.5	17.90	98.1	13.2/1.1

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Performance at 6.2 bar (90 psi)

Air Impacttools™ | Accessories

Sockets Features

Genuine Ingersoll Rand impact sockets are built of top-quality materials for performance and durability.



Our sockets come with a lifetime warranty. Specifically designed for use with Ingersoll Rand power tools, our sockets are the perfect solution for your everyday tightening and loosening applications.

PowerSocket™


Get up to 50% More Power*

Even when facing the toughest crank bolt or a frozen or rusted lug nut, you won't need to switch to a bigger tool or breaker bar! Because the PowerSocket™ adds the torque you need to your favorite ½" impact wrench. It allows you to remove the most difficult fastener after just a few blows, getting the job done quickly.

Thanks to its revolutionary, patent-pending power ring design, PowerSockets™ provide up to 50% more torque* with your ½" impact wrench. Built to the same standards



as our professional-grade impact sockets, they are made to last and work as hard as you.

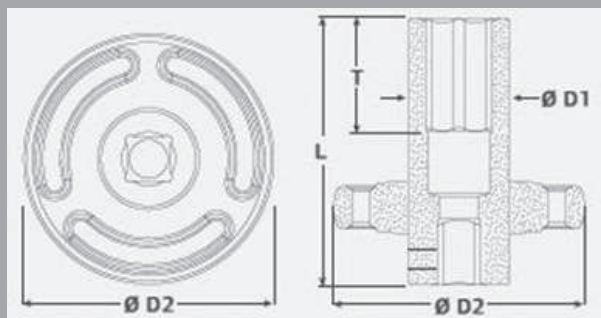

Part Number	CCN	Output Size	Weight kg	D1 mm	D2 mm	T mm	L mm
6-PT PowerSocket™							
S64M17L-PS1	47539801001	17 mm	0.56	30.7	72.6	28.5	78
S64M18L-PS1	47569349001	18 mm	0.56	31.2	72.6	33.7	78
S64M19L-PS1	47539800001	19 mm	0.55	31.4	72.6	34.3	78
S64M21L-PS1	47539802001	21 mm	0.58	34.2	72.6	32.5	78
S64M22L-PS1	47569350001	22 mm	0.64	35.8	72.1	30.3	78
S64M24L-PS1	47569351001	24 mm	0.67	38.2	72.1	30.3	78
S64M26L-PS1	47539803001	26 mm	0.69	39.6	72.1	33.0	78
S64M27L-PS1	47539804001	27 mm	0.71	41.1	72.1	35.7	78

SK2M12

1/4" Square Drive Socket Sets
CCN: 81287336



- 6, 7, 8, 9, 10, 11, 12, 13 and 14 mm, 50 and 100 mm extensions, 3/8"F x 1/4"M adapter

SK3M10

3/8" Square Drive Socket Sets
CCN: 81287344



- 9, 10, 11, 12, 13, 14, 15, 16, 17 and 19 mm

SK4M14

1/2" Square Drive Socket Sets
CCN: 80171077



- Contains 14 standard sockets
- 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23 and 24 mm

SK4M18

1/2" Square Drive Socket Sets
CCN: 81287385



- Contains 9 standard sockets
- 10, 11, 13, 14, 17, 19, 21, 22 and 24 mm
- 4 deep sockets
- 13, 14, 21, and 24 mm
- 3 deep/thin wall sockets
- 17, 19 and 21 mm
- 125 mm extension bar and 1/2" square drive power joint

SK4M3L

1/2" Square Drive Socket Sets
CCN: 81287377



- Contains 3 deep insulated thin wall sockets
- 17, 19 and 21 mm

SK4M7U

1/2" Square Drive Socket Sets
CCN: 80171093



- 13, 14, 15, 17, 19, 21 and 22 mm
- pre-fitted on power joints – to facilitate handling nuts and bolts in areas with very limited accessibility

SK4M5L

1/2" Square Drive Socket Sets
CCN: 81287369



- Contains 5 deep sockets
- 17, 19, 21, 22 and 24 mm

SK6M6L

3/4" Square Drive Socket Sets
CCN: 81287401



- Contains 6 deep sockets
- 24, 27, 30, 32, 33 and 36 mm

SK8M4L

1" Square Drive Socket Sets
CCN: 81287419



- Contains 4 deep sockets
- 27, 30, 32 and 33 mm

Air Impacttools™ | Accessories


Impact Socket Extensions



	Square drive	Length (mm)	Recommended retaining ring
E24H	1/4"	100	-
E26H	1/4"	150	-
E33H	3/8"	75	RR10003
E36H	3/8"	150	RR10003
E312H	3/8"	300	RR10003
E43H	1/2"	75	RR10006
E45H	1/2"	125	RR10006
E47H	1/2"	175	RR10006
E410H	1/2"	250	RR10006
E424H	1/2"	600	RR10006

	Square drive	Length (mm)	Recommended retaining ring
E63H	3/4"	75	RR10034S
E67H	3/4"	175	RR10034S
E610H	3/4"	250	RR10034S
E83H	1"	75	RR10015S
E87H	1"	175	RR10015S
E810H	1"	250	RR10015S
E813H	1"	330	RR10015S


Universal Joints

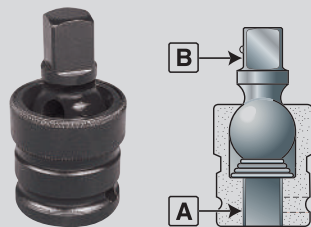

Universal Joint

	A (mm)	B (mm)	Recommended retaining ring
J2	1/4"	1/4"	-
J3	3/8"	3/8"	-
J4	1/2"	1/2"	-
J6	3/4"	3/4"	RR10034S
J8	1"	1"	RR10015S

Adapters



	A (mm)	B (mm)	Recommended retaining ring
A2F3M	1/4"	3/8"	-
A3F2M	3/8"	1/4"	RR10003
A3F4M	3/8"	1/2"	RR10003
A4F3M	1/2"	3/8"	RR10006
A4F6M	1/2"	3/4"	RR10008
A6F4M	3/4"	1/2"	RR10034S
A6F8M	3/4"	1"	RR10034S
A8F6M	1"	3/4"	RR10015S


Air Impacttools™ | Service kits



A: Tune-up kit
B: Hammer mechanism kit

	A	B
1/4" and 3/8"	CCN	CCN
1105MAX-D2	45668456	45668522
105-D2	45668142	45668522
2115QtiMAX	45585189	45585932
15QMAX	4762155001	47562154001
212	03866522	—
211	03866449	—
LA158	49827108	49827090
109XPA	16594160	16594384
107XPA	80146491	16590416
1207MAX-D3	47085931	47086368
1105MAX-D3	45668456	45668563
105-D3	45668142	45668563
1/2"	CCN	CCN
35MAX	4762155001	47562154001
2135QXPA	45535028	80119571
2135QXPA-2	45535028	80119662
2235QXPA	47517401001	47517319001
2235QtiMAX	47517401001	47517319001
2235QtiMAX-2	47517401001	47517319001
2130XP	80142375	80140528
1099XPA	16594160	16594392
1077XPA	80146491	16590424
1770	—	80147077
2125QtiMAX	45585189	45585932
2025MAX	47100474	47100359

	A	B
3/4"	CCN	CCN
2145QiMAX	47100011	47102561
2145QiMAX-3	47100011	47102561
2145QiMAX-6	47100011	47102561
2161XP	04621744	—
2161XP-6	04621744	—
261	03866597	22039259
261-3	03866597	—
261-6	03866597	—
259	45663796	45663853
1" pistol	CCN	CCN
295A	16590242	—
295A-6	16590242	—
2155QiMAX	47100011	47102561
2171XP	04621744	80137698
2171XP-6	04621744	80137714
271	03866597	—
1" rear handle	CCN	CCN
631L	45766789	—
2190Ti	80137383	80137698
2190Ti-6	80137383	80137714
2190DTi-6	80137383	80137714
280-EU	03866605	—
280-6-EU	03866605	—
285B	16578965	—
285B-6	16578965	—

A full-page photograph of a male mechanic with a shaved head, wearing a blue long-sleeved work shirt and black work gloves. He is focused on working on the engine of a car with its hood open. He is using a silver and black air ratchet tool, which is connected to a yellow air hose. The background is a plain, light-colored wall. The overall scene is a professional automotive repair environment.

Getting torque even to those hard to reach bolts – Ingersoll Rand Air Ratchets take the hassle out of your job.



Air Ratchets

36 | 1/2"

37 | 3/8"

37 | 1/4"

When Mies van der Rijn has a job to do, he wants to get it done. Loosening and tightening nuts and bolts has to feel natural to him, even in the most remote nook or corner. With the excellent ergonomic and versatility of Ingersoll Rand's compact ratchets, he has found a forceful partner for life.

Mies van der Rijn, Rotterdam

Air Ratchets



1099XPA 1/2" ■

- 103 Nm and 220 rpm
- Variable speed lever
- 360° adjustable exhaust



Also available

109XPA 3/8"

Protection Boot

109-BOOT CCN: 80181001

Ref.	CCN	in	Nm	Nm	rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
1099XPA	80181001	1/2" □	103	87	220	1.51	306	1/4 NPT	10	1.9	11.30	92.4	2.5/0.7
109XPA	16578700	3/8" □	103	87	220	1.50	306	1/4 NPT	10	1.9	11.30	92.4	2.5/0.7

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Ratchets

1105MAX-D3

3/8" ■



- 41 Nm and 300 rpm
- Only 0.65 kg and 187 mm
- Composite housing
- Power regulator
- Variable speed lever

Also available

1105MAX-D2

1/4"

Protection Boot

103-BOOT

CCN: 45649035

1207MAX-D4

1/2" ■



- 88 Nm and 200 rpm
- Composite housing
- Power regulator
- Variable speed lever
- 360° adjustable exhaust

Also available

1207MAX-D3

3/8"

1077XPA

1/2" ■



- 73 Nm and 160 rpm
- Variable speed lever
- 360° adjustable exhaust

Also available

107XPA

3/8"

Protection Boot

107-BOOT

CCN: 80171853

105-D3

3/8" ■



- 34 Nm and 250 rpm
- Only 0.64 kg and 186 mm
- Variable speed lever

Also available

105-D2

1/4"

Protection Boot

103-BOOT

CCN: 45649571

1770

1/2" ■



- 81 Nm of maximum torque
- Heat-treated head provides exceptional durability
- Variable speed lever allows precise delivery of power


Also available

170

3/8"

Ref.	CCN	in	Nm	Nm	rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
1105MAX-D3	45649480	3/8" □	41	34	300	0.65	187	1/4 NPT	10	1.6	9.40	88.9	5.7/1.0
1105MAX-D2	45649035	1/4" □	41	34	300	0.65	187	1/4 NPT	10	1.6	9.40	88.9	5.7/1.0
1207MAX-D4	45654225	1/2" □	88	81	200	1.45	275	1/4 NPT	10	1.9	10.80	85.0	3.2/1.1
1207MAX-D3	45643276	3/8" □	88	81	200	1.45	275	1/4 NPT	10	1.9	10.80	85.0	3.2/1.1
1077XPA	80171853	1/2" □	73	61	160	1.25	276	1/4 NPT	10	1.9	8.80	94.4	< 2.5
107XPA	80171705	3/8" □	73	61	160	1.24	276	1/4 NPT	10	1.9	8.80	94.4	< 2.5
105-D3	45649738	3/8" □	34	27	220	0.64	186	1/4 NPT	10	1.4	8.50	81.8	5.1/0.9
105-D2	45649571	1/4" □	34	27	220	0.64	186	1/4 NPT	10	1.4	8.50	81.8	5.1/0.9
1770	80103799	1/2" □	81	81	160	1.17	262	1/4 NPT	10	1.9	10.00	94.8	2.8/0.7
170	80103781	3/8" □	81	81	160	1.16	262	1/4 NPT	10	1.9	10.00	94.8	2.8/0.7

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

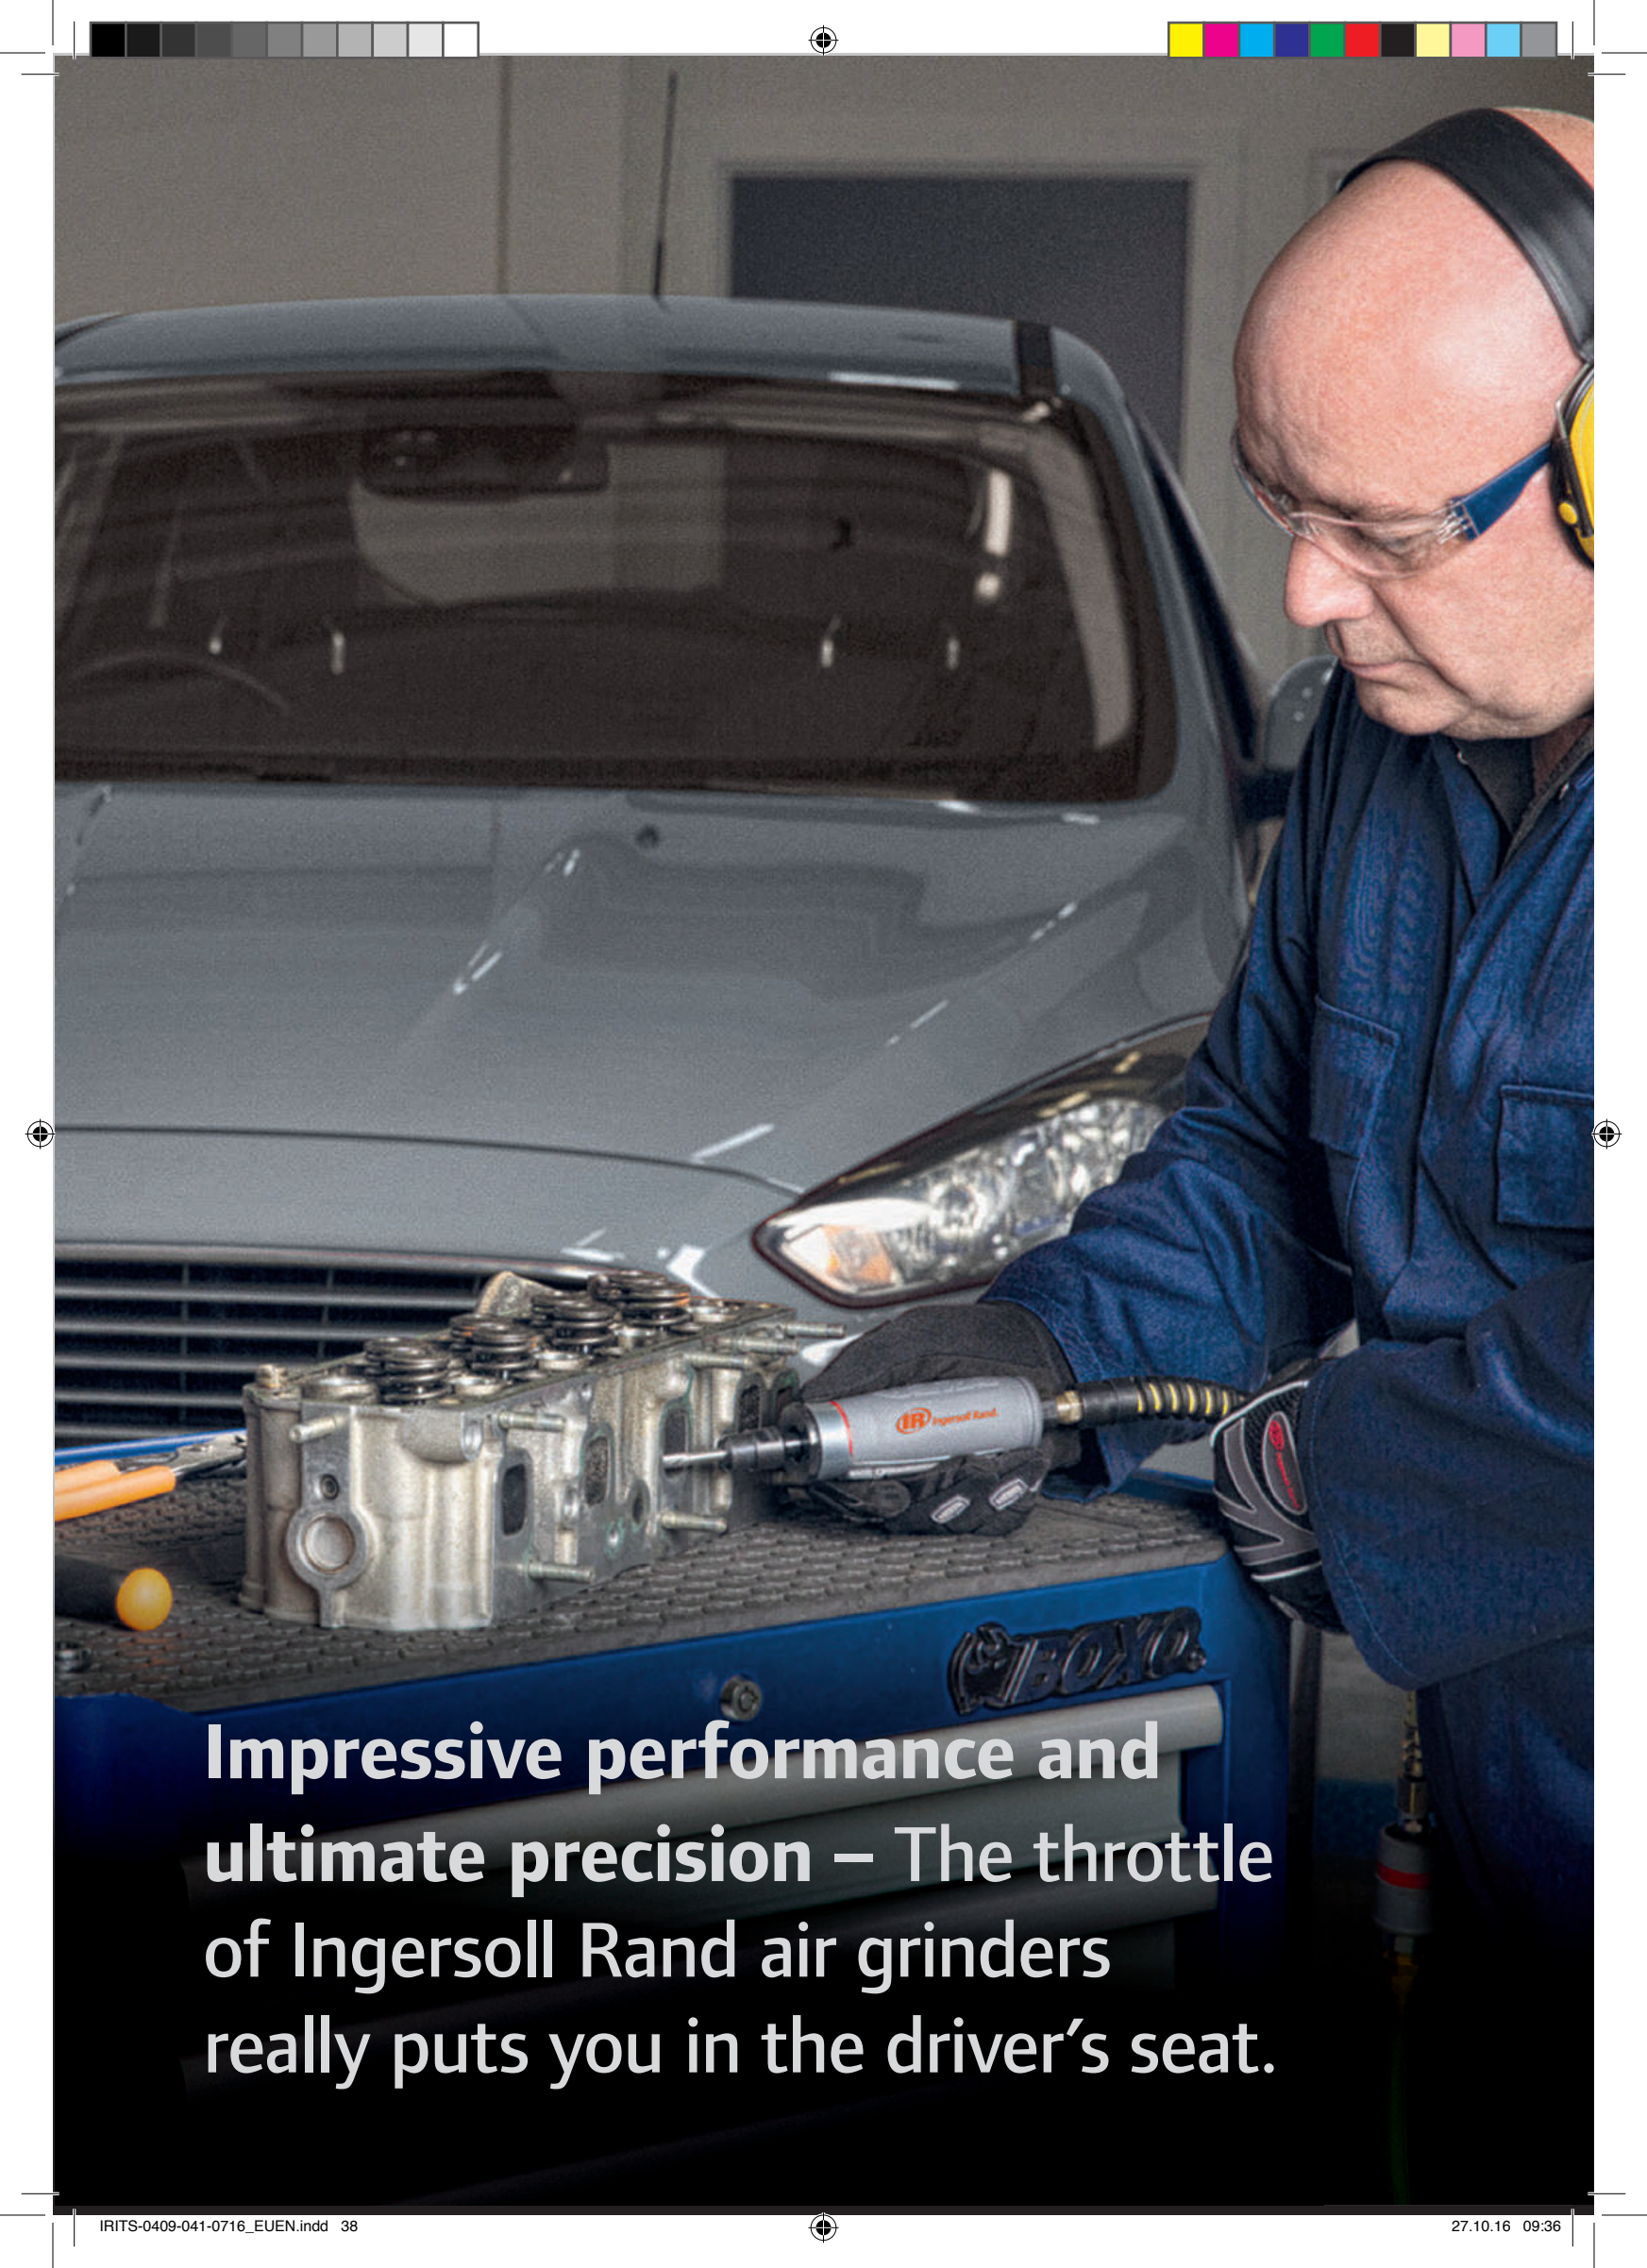

Impressive performance and ultimate precision – The throttle of Ingersoll Rand air grinders really puts you in the driver's seat.



Air Grinders

40 | Die Grinders

43 | Wheel Grinders

With the sheer power a grinder needs, control is of the essence for Tomasz Głacz. Because he always aims for maximum precision. Working with a compact, lightweight Ingersoll Rand grinder, he hasn't only come to love the handling but also is a good deal more efficient.

Tomasz Głacz, Krakow

Air Grinders



5102MAX

Angle



- 0.30 kW
- 20,000 rpm
- Only 0.64 kg and 178 mm
- Composite housing
- Contains: 1/4" and 6 mm collets












Also available

5108MAX

Straight



- 0.30 kW
- 20,000 rpm
- Only 0.64 kg and 178 mm
- Composite housing
- Contains: 1/4" and 6 mm collets

Ref.	CCN	 mm	 kW	 rpm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
5102MAX	48488357	1/4" + 6	0.30	20,000	0.64	180	1/4 NPT	10	2.8	11.80	84.1	3.3/1.1
5108MAX	48488340	1/4" + 6	0.30	25,000	0.46	172	1/4 NPT	10	2.8	11.80	83.3	1.8/0.8

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Grinders | Die Grinders

308B
Straight



- 0.25 kW
- 25,000 rpm
- Only 0.46 kg and 172 mm
- Contains: 1/4" and 6 mm collets

302B
Angle














- 0.25 kW
- 20,000 rpm
- Only 0.58 kg and 175 mm
- Contains: 1/4" and 6 mm collets

307B
Straight



- 0.19 kW
- 28,000 rpm
- Only 0.33 kg and 125 mm
- Contains: 1/4" and 6 mm collets

Ref.	CCN	 mm	 kW	 rpm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
308B	48488332	1/4" + 6	0.25	25,000	0.46	172	1/4 NPT	10	3.3	13.20	92.0	3.7/1.2
302B	48488365	1/4" + 6	0.25	20,000	0.58	175	1/4 NPT	10	2.8	10.80	90.0	5.5/1.5
307B	48488316	1/4" + 6	0.19	28,000	0.33	125	1/4 NPT	10	2.8	11.30	83.0	4.5/1.1

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Grinders | Die Grinders

301B

Angle



- 0.19 kW
- 21,000 rpm
- Only 0.46 kg and 128 mm
- Contains: 1/4" and 6 mm collets

Replacement collets



Ref.	CCN	diameter
Collets for 301B, 302B, 307B, 308B, 5102MAX, 5108MAX and LA429-EU		
301-700C	80128952	Ø 1/8"
301-700B	04552600	Ø 6 mm
301-700	80102346	Ø 1/4"

LA429-EU

Straight



- 0.42 kW
- 20,000 rpm
- Only 0.54 kg
- Contains: 1/4" and 6 mm collets

Ref.	CCN	mm	kWatt	rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
301B	48488308	1/4" + 6	0.19	21,000	0.46	128	1/4 NPT	10	2.8	11.30	91.8	5.9/1.0
LA429-EU	01328558	1/4" + 6	0.42	22,000	0.54	142	1/4 NPT	10	1.8	9.00	91.0	3.2/1.7

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Grinders | Wheel Grinders

345MAX-M

125 mm (5")



- 0.66 kW
- 12,000 rpm
- Speed governor
- Composite housing
- Piped-away exhaust system

Also available

3445MAX-M

115 mm (4.5")

LA422-EU

125 mm (5")














- 0.50 kW
- 12,000 rpm

Also available

LA421-EU

100 mm (4")

Ref.	CCN			kWatt									
		mm	mm	kW	rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
345MAX-M	45664257	125	M14	0.66	12,000	1.56	245	1/4 NPT	10	4.9	19.30	79.6	7.9/0.7
3445MAX-M	45664240	115	M14	0.66	12,000	1.53	245	1/4 NPT	10	4.9	19.30	79.6	6.4/2.0
LA422-EU	01328582	125	3/8" - 24	0.50	12,000	1.75	229	1/4 NPT	10	2.8	10.40	85.6	6.0/2.1
LA421-EU	01328632	100	3/8" - 24	0.50	12,000	1.75	229	1/4 NPT	10	2.8	10.40	85.6	4.8/1.4

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.



For all to whom finishing is an art form – Ingersoll Rand gives you perfect grip and the perfect tool, for whatever purpose.



Air Finishing tools

- 46 | Air Sanders and Polishers
- 50 | Pads, Disks and Bonnets

For Mustafa Belkhoda, perfect body work starts with a perfect finish. Smooth, swirl free surfaces are an accomplishment he prides himself on. Ingersoll Rand's sanders fit his hand like a glove, giving his work a sophistication that leaves him with a proud smile at the end of every day.

Mustafa Belkhoda, Chartres

Air Finishing tools



8101MAX

11,500 rpm, orbit 2.5 mm (3/32")



Available Accessories

8000MAX-700

150 mm PSA backing pad + screw

8000MAX-750

150 mm hook & loop backing pad + screw

- 0.2 kW (0.27 HP)
- 11,500 rpm
- Only 0.75 kg
- variable speed regulator
- Light weight, reduced vibrations
- 8100 Series Non-Vacuum Sanders
- 8200 Series Vacuum-ready Sanders

Also available

8102MAX

10,500 rpm, orbit 5 mm (3/16")

8103MAX

9,500 rpm, orbit 10 mm (3/8")

8202MAX

10,500 rpm, orbit 5 mm (3/16")

8203MAX

9,500 rpm, orbit 10 mm (3/8")

8201MAX

11,500 rpm, orbit 2.5 mm (3/32")



Ref.	CCN	mm	mm	mm	kWatt	1 min rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
8101MAX	48621973	150	2.50	M8	0.20	11,500	0.75	92	1/4 NPT	8	1.6	6.00	76.0	7.2/2.4
8102MAX	48621981	150	5.00	M8	0.20	10,500	0.75	92	1/4 NPT	8	1.6	6.00	76.0	6.9/2.3
8103MAX	48621999	150	10.00	M8	0.20	9,500	0.80	92	1/4 NPT	8	1.6	6.00	76.0	6.8/2.2
8201MAX	48622005	150	2.50	M8	0.20	11,500	0.75	92	1/4 NPT	8	1.6	6.00	76.0	7.2/2.4
8202MAX	48622013	150	5.00	M8	0.20	10,500	0.75	92	1/4 NPT	8	1.6	6.00	76.0	6.9/2.3
8203MAX	48622021	150	10.00	M8	0.20	9,500	0.80	92	1/4 NPT	8	1.6	6.00	76.0	6.8/2.2

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Finishing tools | Air Sanders and Polishers

4152-HL-SR

75 mm (6"), orbit 2.5 mm (3/32")



- 0.15 kW (0.20 HP)
- 12,000 rpm
- Only 0.86 kg
- Composite housing
- Auto-balancer
- Power regulator

Also available

4152-HL

150 mm (6"), orbit 2.5 mm (3/32")

4151-HL

150 mm (6"), orbit 5 mm (3/16")

4151-HL-2

150 mm (6"), orbit 5 mm (3/16")

311A

150 mm (6"), orbit 5 mm (3/16")



- 150 mm (6")
- Orbit: 5 mm (3/16")
- 10,000 rpm
- Power regulator

317A

75 mm (3") and 125 mm (5")



- 75 mm and 125 mm
- 0.35 kW (0.45 HP)
- 18,000 rpm
- Power regulator

Ref.	CCN	mm	mm	mm	kWatt	rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
4151-HL	1371624	150	5.00	5/16" - 24	0.15	12,000	0.86	190	1/4 NPT	8	3.7	7.20	81.6	7.5/1.6
4151-HL-2	22041198	150	5.00	5/16" - 24	0.15	12,000	1.12	252	1/4 NPT	8	3.7	7.20	81.6	6.2/1.0
4152-HL	80134356	150	2.50	5/16" - 24	0.15	12,000	0.86	190	1/4 NPT	8	3.7	7.20	81.6	8.2/1.7
4152-HL-SR	16674301	75	2.50	5/16" - 24	0.15	12,000	0.84	155	1/4 NPT	8	3.7	7.20	81.6	4.7/1.3
311A	01365253	150	5.00	5/16" - 24	0.19	10,000	1.90	248	1/4 NPT	10	8.0	11.80	84.3	32.3/5.6
317A	80090863	125	-	7/16" - 20	0.35	18,000	1.05	104	1/4 NPT	10	5.7	11.80	86.7	3.3/0.8

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Finishing tools | Air Sanders and Polishers

3103XPA

Sander - Tool only



- 50 mm (2") and 75 mm (3")
- 0.15 kW (0.2 HP)
- 15,000 rpm
- Only 0.50 kg and 135 mm
- Composite housing
- 2-position power regulator

Available in kits

3103KA Kit

CCN: 47520769001



Includes 14-piece 2" (50mm) and 3" (75mm) sanding discs and pads

3128XPA

RO Sander - Tool only




- 75 mm (3")
- Orbit 5 mm (3/16")
- 0.15 kW (0.2 HP)
- 15,000 rpm
- Only 0.60 kg and 145 mm
- Composite housing
- 2-position power regulator

Available in kits

3128KA Kit

CCN: 47520770001



Includes 71-piece hook and loop discs and pad:
- 180, 220, 320 and 800 grits aluminum oxide
- backing pad

3129XPA

Polisher - Tool only



- 75 mm (3")
- 0.22 kW (0.30 HP)
- 6,400 rpm
- Only 0.60 kg and 155 mm
- Composite housing
- 2-position power regulator

Available in kits

3129KA Kit

CCN: 47520771001



Includes four-piece hook and loop pads with foams

Ref.	CCN	mm	mm	kWatt	$\frac{1 \text{ min}}{\text{rpm}}$	kg	mm	in	mm	l/s	l/s	dB(A)	$\text{m/s}^2/\text{K}^{(1)}$
3103XPA	47520748001	50 and 75	-	0.15	15,000	0.50	135	1/4 NPT	10	9.0	0.00	78.6	4.1/0.8
3128XPA	47520749001	75	5.00	0.15	15,000	0.60	145	1/4 NPT	10	8.6	0.00	80.9	5.2/1.1
3129XPA	47520750001	75	-	0.22	6,400	0.60	155	1/4 NPT	10	9.4	0.00	81.5	2.7/0.7

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Finishing tools | Air Sanders and Polishers

313A

Tool only



- 180 mm (7")
- 0.37 kW (0.5 HP)
- 5000 rpm

Also available

314A

2,500 rpm

318A

Tool only



- 180 mm (7")
- 0.6 kW (0.8 HP)


Also available

319A

5,000 rpm

312A

93 x 171 mm (3.67 x 6.75")



- 0.22 kW (0.30 HP)
- 8,000 strokes per minute

Also available

315-EU


70 x 445 mm (2,75 x 17,5")
3,000 strokes per minute

Ref.	CCN	mm	mm	kWatt	1 min rpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
313A	80141021	180	5/8" - 11	0.37	5,000	2.04	406	1/4 NPT	10	3.8	13.70	88.0	< 2.5
314A	80141039	180	5/8" - 11	0.37	2,500	1.90	406	1/4 NPT	10	3.8	13.70	87.0	< 2.5
318A	80141047	180	-	0.60	2,800	2.05	203	1/4 NPT	10	2.8	9.90	85.0	< 2.5
319A	80141054	180	5/8" - 11	0.60	5,000	2.05	203	1/4 NPT	10	2.8	9.90	85.0	< 2.5
312A	80147101	93 x 171	-	0.22	8,000	2.09	171	1/4 NPT	10	4.3	5.70	86.0	7.7/1.5
315-EU	1343961	70 x 445	-	-	3,000	2.77	445	1/4 NPT	10	3.8	4.30	93.3	20.5/1.6

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Finishing tools | Pads, Disks and Bonnets

Quick-change pads & abrasives 50 mm (2") and 75 mm (3")

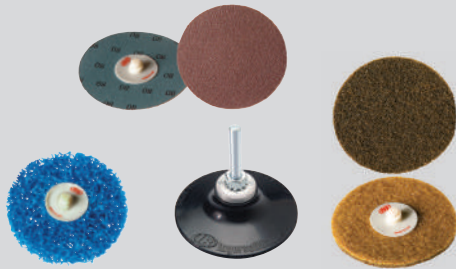

Ref.	CCN	Description	Qty.
50 mm (2") Diameter			
02A-MEDPD	80199177	Quick-change pad with 1/4" mandrel	1
02A-CRSBR	80199193	Coarse coating removal discs	1
02A-MEDBR	80199185	Medium coating removal discs	1
02A-BBCRS-25	80207574	Quick-strip discs	25
02A-036AO	80199896	Aluminum oxide sanding discs, grit 36	1
02A-036AO	80199201	Aluminum oxide sanding discs, grit 80	1
75 mm (3") Diameter			
03A-MEDPD	80198963	Quick-change pad with 1/4" mandrel	1
03A-CRSBR	80199037	Coarse coating removal discs	1
03A-MEDBR-25	80206220	Medium coating removal discs	25
03A-CRSBB-10	80216690	Quick-strip discs	10
03A-036AO	80200009	Aluminum oxide sanding discs, grit 36	1
03A-080AO5	80199219	Aluminum oxide sanding discs, grit 80	1

Hook-and-loop pad, discs & bonnets 75 mm (3")



Ref.	CCN	Description	Qty.
Backer pad			
03H-PAD-HL	80199136	Backer pad Ø 75 mm (3 in), hook & loop	1
Aluminum oxide sanding discs			
03H-040AO-50	80207582	Grit 40	50
03H-100AO-50	80206279	Grit 100	50
03H-180AO-50	80206295	Grit 180	50
03H-220AO-50	80206303	Grit 220	50
03H-320AO-50	80206329	Grit 320	50
03H-500AO-50	80206352	Grit 500	50
03H-800AO-50	80205404	Grit 800	50
Polishing Bonnets			
03F-SFTWL-6	80206170	Wool bonnet (for compounding)	6
03F-MEDFM-6	80206188	Waffle bonnet/white (for compounding)	6
03F-SFTFM-6	80206196	Waffle bonnet/yellow (for polishing)	6

Accessories for 4151 and 4152



Ref.	CCN	Description
4151JV	04662896	Jet-Vac conversion kit
49988	04324455	Dust collection bags (20 pieces)
49987	04324448	Dust collection bags (250 pieces)
4151-747B	80095151	Rubber grip
4151-2-747BLK	22041941	Rubber grip, long handle
49798	04248555	Rubber grip, medium
49799	04248563	Rubber grip, large
49840	04252938	Rubber grips (3 pieces: small, medium and large)



When hard-hitting meets minor effort – reduce your strain and save energy for a variety of jobs within the workshop.



Air Hammers

- 54 | Round shank
- 55 | Needle Scaler
- 55 | Accessoires

Enzo Buonpensa has never cut, punched, chipped, scraped, or worked on exhaust more conveniently and swiftly. The intelligent design of the robust Ingersoll Rand Air Hammer makes it indispensable especially for extended use. That's why the new tool has really paid off quickly for him.

Enzo Buonpensa, Turin

Air Hammers



118MAX

Round shank



- Stroke: 89 mm
- 2,500 blows per minute
- Contains: quick-change retainer

Also available

118MAXH
Hexagonal shank











Available in kits

118MAXK Round shank
CCN: 47125877

118MAXHK Hexagonal shank
CCN: 46816765



Hammer + Quick-Change Retainer and 5 Chisels

Ref.	CCN	 bpm	 mm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
118MAX	47124490	2,500	89	2.10	314	1/4 NPT	10	1.4	5.50	92.6	4.0/1.4
118MAXH	46816732	2,500	89	2.10	314	1/4 NPT	10	1.4	5.50	92.6	4.0/1.4

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Hammers | Round shank | Needle Scaler

122MAX
Round shank



- Stroke: 67 mm
- 3,500 blows per minute
- Contains: quick-change retainer

Also available
122MAXH
Hexagonal shank

Available in kits
122MAXK Round shank
CCN: 47125869
122MAXHK Hexagonal shank
CCN: 46816757



Hammer + Quick-Change Retainer and 5 Chisels

121/Q-EU
Round shank



- Stroke: 58 mm
- 3,000 blows per minute

Also available
121/QH-EU
Hexagonal shank

125-EU
Needle Scaler



- Stroke: 28 mm
- 4,600 blows per minute
- Contains: steel needles

116-EU
Round shank



- Stroke: 67 mm
- 3,500 blows per minute
- Power regulator

Also available
116H-EU
Hexagonal shank

Available in kits
LA426-EU Round shank
CCN: 01328640
LA427-EU Hexagonal shank
CCN: 01328590



Hammer + 6 Chisels

Air Hammers | Accessories

- **115-183** (CCN: 03788510) spring retainer for 116-EU, 116H-EU, LA426-EU and LA427-EU
- **AVC10-183** (CCN: 03010980) spring retainer for 121/Q-EU and 121/QH-EU
- **9512** (CCN: 45563749) quick-change retainer for all models
- **9500** (CCN: 80117427) chisels, round shank (5 pieces)
- **116H-K5** (CCN: 92536093) chisels, hexagonal shank (5 pieces)



115-183



9512



9500

Ref.	CCN	bpm	mm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
122MAX	47124482	3,500	67	1.80	218	1/4 NPT	10	1.4	5.50	94.2	5.5/1.8
122MAXH	46816740	3,500	67	1.80	218	1/4 NPT	10	1.4	5.50	94.2	5.5/1.8
121/Q-EU	01343698	3,000	58	1.59	194	1/4 NPT	10	1.4	7.10	95.3	19.9/4.6
121/QH-EU	01344944	3,000	58	1.59	194	1/4 NPT	10	1.4	7.10	95.3	19.9/4.6
125-EU	01352178	4,600	29	2.83	465	1/4 NPT	8	3.8	7.10	96.6	8.3/1.3
116-EU	01343755	3,500	67	1.54	198	1/4 NPT	10	1.4	7.10	101.4	14.8/2.2
116H-EU	01343904	3,500	67	1.54	198	1/4 NPT	10	1.4	7.10	101.4	14.8/2.2

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.



For Ingersoll Rand, durability is key – because a tool becomes an extension to the hand.



Air Drills, Screwdrivers and specialty tools

- 58 | Drills
- 60 | Screwdrivers
- 61 | Specialty Tools (incl. cutting tools)

When the going gets tough, Knut Paulsen gets his toughest tools going. And these are his Ingersoll Rand Air Drills and Screwdrivers. Having counted on them for all purposes for years, he knows a thing or two about them: being virtually indestructible they are in high demand in the shop and best kept in the top shelf right next to him.

Knut Paulsen, Hamburg

Air Drills, Screwdrivers and specialty tools



7804XPA

Standard chuck, reversible



- 6.5 mm (1/4 in)
- 0.12 kW (0.17 HP)
- 1,600 rpm
- Only 0.8 kg and 180 mm
- Composite housing
- Reversible

Available in kits

7804KA Standard chuck, reversible
CCN: 47520772001



Includes 22-piece drill bit and driver set

Ref.	CCN	SIZE mm	kWatt kW	$\frac{1}{\text{min}}$ rpm	 kg	\overleftarrow{L} mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
7804XPA	47520751001	10	0.19	1,875	0.80	193	1/4 NPT	10	0.9	7.65	84.3	2.9/0.8

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Drills, Screwdrivers and specialty tools | Drills

7803A

Standard chuck



- 13 mm (1/2 in) chuck
- 0.37 kW (0.50 HP)
- 500 rpm

Also available

7803AKC

Keyless chuck

7803RA

Standard chuck, reversible

7803RAKC

Keyless chuck, reversible

Protection Boot

7803-BOOT

CCN: 80113632

7802A

Standard chuck



- 10 mm (3/8 in) chuck
- 0.37 kW (0.50 HP)
- 2,000 rpm

Also available

7802AKC

Keyless chuck

7802RA

Standard chuck, reversible

7802RAKC

Keyless chuck, reversible

Protection Boot

7802-BOOT

CCN: 80113616

7807R-EU

Standard chuck, reversible



- 10 mm (3/8 in) standard chuck
- 0.25 kW (0.33 HP)
- 2,000 rpm
- Reversible

LA410-EU

Standard chuck



- 10 mm (3/8 in) standard chuck
- 0.25 kW (0.33 HP)
- 4,500 rpm

Ref.	CCN	SIZE	kWatt	1 min	kg	L	mm	in	mm	l/s	MAX	dB(A)	m/s ² /K ⁽¹⁾
		mm	kW	rpm									
7803A	80113632	13	0.37	500	1.63	195	1/4 NPT	10	1.9	12.70	83.0	< 2.5	
7803AKC	10563724	13	0.37	500	1.63	200	1/4 NPT	10	1.9	12.70	83.0	< 2.5	
7803RA	80113673	13	0.37	500	1.64	195	1/4 NPT	10	1.9	12.70	83.0	< 2.5	
7803RAKC	10563732	13	0.37	500	1.64	200	1/4 NPT	10	1.9	12.70	83.0	< 2.5	
7802A	80113616	10	0.37	2,000	1.31	163	1/4 NPT	10	1.9	12.30	83.0	2.8/0.7	
7807R-EU	01352160	10	0.25	1,800	1.07	206	1/4 NPT	10	1.9	8.10	89.2	< 2.5	
7802AKC	10563716	10	0.37	2,000	1.35	175	1/4 NPT	10	1.9	12.30	83.0	2.8/0.7	
7802RA	80113640	10	0.37	2,000	1.30	163	1/4 NPT	10	1.9	12.30	83.0	2.8/0.7	
7802RAKC	80147424	10	0.37	2,000	1.36	175	1/4 NPT	10	1.9	12.30	83.0	2.8/0.7	
LA410-EU	01328616	10	0.25	4,500	0.91	228	1/4 NPT	10	1.4	12.80	84.9	2.9/0.7	

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Drills, Screwdrivers and specialty tools | Screwdrivers

LA439-EU

1/4" Hexagonal



- 13 Nm
- 0.25 kW
- 1,800 rpm
- Adjustable clutch
- 1-hand forward and reverse switch

LA412-EU

1/4" Hexagonal



- 13 Nm
- 0.25 kW
- 1,800 rpm
- Positive jaw clutch
- 1-hand forward and reverse switch

371-EU

1/4" Hexagonal


















- 13 Nm
- 0.25 kW
- 1,800 rpm
- Positive jaw clutch
- 1-hand forward and reverse switch

LA413-EU

1/4" Hexagonal



- 13 Nm
- 0.25 kW
- 1,800 rpm
- Adjustable clutch
- 1-hand forward and reverse switch

Ref.	CCN	 in	 kW	 rpm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
LA439-EU	01330133	1/4" 	0.25	1,800	1.10	216	1/4 NPT	10	1.4	13.70	89.9	< 2.5
LA412-EU	01330075	1/4" 	0.25	1,800	1.60	184	1/4 NPT	10	1.9	13.70	89.6	< 2.5
371-EU	01352152	1/4" 	0.25	1,800	1.14	188	1/4 NPT	10	1.9	10.20	91.0	< 2.5
LA413-EU	01330109	1/4" 	0.25	1,800	1.50	260	1/4 NPT	10	1.4	8.00	109.2	< 2.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Drills, Screwdrivers and specialty tools | Specialty Tools (incl. cutting tools)

426

Reversible cut-off tool



- 75 mm (3")
- Only 0.9 kg weight
- Composite housing
- Variable-speed lever
- Rear exhaust directs air away from the operator
- Includes 5 cutting discs

324-1

Pin Stripe Remover



- 450 W
- Only 0.8 kg weight for a work without effort
- Variable-speed lever allows precise delivery of power and speed
- Rear exhaust directs air away from the operator
- Includes 1 rubber pad

Also available

324

Pin Stripe Remover kit 12 pads

327-EU

Tire Buffer



- 10 mm (3/8") standard chuck
- 0.38 kW
- Only 0.73 kg

327LS

Tire Buffer



- 0.38 kW
- 3,000 rpm
- Only 0.50 kg
- Piped-away exhaust system

Ref.	CCN	kWatt kW	$\frac{1}{\text{min}}$ rpm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
426	47509194001	0.48	20,000	0.90	206	1/4 NPT	10	12.3	0.00	92.1	4.3/0.9
324-1	47515703001	0.45	3,700	0.80	200	1/4 NPT	10	13.2	0.00	89.0	3.3/0.7
324	47509197001	0.45	3,700	0.80	200	1/4 NPT	10	13.2	0.00	89.0	3.3/0.7
327-EU	01343771	0.38	22,000	0.73	224	1/4 NPT	10	7.1	12.60	87.9	4.6/1.1
327LS	01371699	0.38	–	0.50	–	1/4 NPT	10	6.6	12.60	77.4	2.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Drills, Screwdrivers and specialty tools | Specialty Tools (incl. cutting tools)

325B

Air Nibbler



- Cutting capacity: 1.2 mm (18-gauge, 0.05")
- 4,200 blows per minute
- Variable speed lever

529

Reciprocating saw



- Stroke: 10 mm
- 9,500 strokes per minute
- Only 0.54 kg
- Variable speed lever
- 360° adjustable exhaust
- Contains: blades (6 pieces)

4429

Reciprocating saw



- Stroke: 10 mm
- 5,000 strokes per minute
- Variable speed lever
- Piped-away exhaust system

Accessories:

P4FS-6

CCN: 45525474

Blades, 12 teeth/cm (6 pieces)

P4CS-6

CCN: 45525508

Blades, 10 teeth/cm (6 pieces)



7802SA

Air shear



- Cutting capacity: 1.0 mm (20-gauge, 0.04")
- 4,200 blows per minute

LA415-EU

Air Riveter



- Aluminum rivet capacity: 2.4 – 6.35 mm (3/32 – 1/4")
- Stroke: 16 mm

Ref.	CCN	bpm	mm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
325B	49806568	4,200	-	1.0	185	1/4 NPT	10	1.9	8	96.0	15.9/1.9
529	47125885	9,500	10	0.7	246	1/4 NPT	6	0.5	1	84.3	3.1/1.0
4429	01371822	5,000	10	0.7	234	1/4 NPT	6	1.9	4	66.2	9.5/2.4
7802SA	80113681	4,200	-	1.3	239	1/4 NPT	10	1.9	10	83.0	3.0/1.0
LA415-EU	01330141	-	16	2.0	197	1/4 NPT	10	-	2	86.8	< 2.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Air Drills, Screwdrivers and specialty tools | Specialty Tools (incl. cutting tools)

LA437-EU

Air Riveter



- Aluminum rivet capacity: 2.4 – 4.75 mm (3/32 – 3/16")

LA428-EU

Caulking gun



- Power regulator
- Cartridge size: 50 x 215 mm

94058

Blow Gun



- Maximum operating pressure: 10.3 bar
- Flow 6.4 l/s
- Air inlet diameter: 1/4" BSP


LA418A-EU

Window screen Cutter



- 20,000 strokes per minute
- Variable speed lever
- Piped-away exhaust system
- Supplied without blades
- Oscillation angle 3°

Available blades for LA418A-EU



LA418-CB1-90



LA418-CB3-30



LA418-CB7-35



LA418-CB4-8



LA418-CB6-35













LA418-CB8-24



LA418-CB2-36



LA418-CB9-60

Ref.	CCN	 mm	 mm	 kg	 mm	 in	 mm	 l/s	 l/s	 dB(A)	 m/s ² /K ⁽¹⁾
LA437-EU	01328608	2.40 – 4.75	16	2.80	164	1/4 NPT	10	–	1.80	89.0	3.2/0.7
LA428-EU	01330067	–	215	1.30	356	1/4 NPT	10	–	–	70.0	2.5
94058	25011222	–	–	–	–	1/4 BSP	–	–	6.40	–	–
LA418A-EU	01336353	–	3	1.00	208	1/4 NPT	10	1.8	12.30	90.8	6.7/2.5

⁽¹⁾ ISO28927 – 3-axis measurement: vibration level/measurement uncertainty.

Accessories


66 | Coupling and Nipples

67 | Hoses

68 | Lubricants




Accessories | Couplings & Nipples



Euro 7.2 - 7.4



		Nipples BSP		Standard couplings		Safety couplings		Safety couplings		
		Ref.	CCN	Ref.	CCN	Ref.	CCN	Ref.	CCN	
Ø 7.2 - 7.4 mm				Max: 16 bar - 25 L/s ⁽¹⁾		Max: 16 bar - 25 L/s ⁽¹⁾		Max: 12 bar - 30 L/s ⁽¹⁾		
	Male thread	1/4" BSP	77NMC2	88104070	7N7CCMC2	25010505	7S7CCMC2	25010398	7S7CMC2	88104187
		3/8" BSP	77NMC3	88104088	7N7CCMC3	25010513	7S7CCMC3	25010406	7S7CMC3	88104195
		1/2" BSP	77NMC4	88104096	7N7CCMC4	25010521	7S7CCMC4	25010414	7S7CMC4	88104203
	Female thread	1/4" BSP	77NFC2	88104047	7N7CCFC2	25010471	7S7CCFC2	25010364	7S7CFC2	88104153
		3/8" BSP	77NFC3	88104054	7N7CCFC3	25010489	7S7CCFC3	25010372	7S7CFC3	88104161
		1/2" BSP	77NFC4	88104062	7N7CCFC4	25010497	7S7CCFC4	25010380	7S7CFC4	88104179
	For hose	Ø 6 mm	77NH06	88104104	7N7CCH06	25010539	7S7CCH06	25010422	7S7CH06	88104211
		Ø 8 mm	77NH08	88104112	7N7CCH08	25010547	7S7CCH08	25010430	7S7CH08	88104229
		Ø 10 mm	77NH10	88104138	7N7CCH10	25010562	7S7CCH10	25010455	7S7CH10	88104245
		Ø 13 mm	77NH13	88104146	7N7CCH13	25010570	7S7CCH13	25010463	7S7CH13	88104252



ISO 6150B MIL-C4109





		Nipples BSP		Standard couplings		Safety couplings		Safety couplings		
		Ref.	CCN	Ref.	CCN	Ref.	CCN	Ref.	CCN	
Ø 6 mm (1/4")				Max: 12 bar - 13 L/s ⁽¹⁾		Max: 16 bar - 15 L/s ⁽¹⁾		Max: 12 bar - 13 L/s ⁽¹⁾		
	Male thread	1/4" BSP	IB6NMC2	88103015	IBN6CMC2	88103197	IBS6CCMC2	25010075	IBS6CMC2	88103098
		3/8" BSP	IB6NMC3	88103023	IBN6CMC3	88103205	IBS6CCMC3	25010083	IBS6CMC3	88103106
		1/2" BSP	-	-	IBN6CMC4	88103213	IBS6CCMC4	25010091	IBS6CMC4	88103114
	Female thread	1/4" BSP	IB6NFC2	88102991	IBN6CFC2	88103163	IBS6CCFC2	25010042	IBS6CFC2	88103064
		3/8" BSP	IB6NFC3	88103007	IBN6CFC3	88103171	IBS6CCFC3	25010059	IBS6CFC3	88103072
		1/2" BSP	-	-	IBN6CFC4	88103189	IBS6CCFC4	25010067	IBS6CFC4	88103080
	For hose	Ø 6 mm	IB6NH06	88103031	IBN6CH06	88103221	-	-	IBS6CH06	88103122
		Ø 8 mm	IB6NH08	88103049	IBN6CH08	88103239	IBS6CCH08	25010117	IBS6CH08	88103130
		Ø 10 mm	IB6NH10	88103056	IBN6CH10	88103247	IBS6CCH10	25010125	IBS6CH10	88103148
Ø 8 mm (3/8")				Max: 12 bar - 33 L/s ⁽¹⁾		Max: 16 bar - 30 L/s ⁽¹⁾		Max: 12 bar - 33 L/s ⁽¹⁾		
	Male thread	1/4" BSP	IB8NMC2	88103296	IBN8CMC2	88104567	-	-	IBS8CMC2	88103395
		3/8" BSP	IB8NMC3	88103304	IBN8CMC3	88104575	IBS8CCMC3	25010158	IBS8CMC3	88103403
		1/2" BSP	IB8NMC4	88103312	IBN8CMC4	88104583	IBS8CCMC4	25010166	IBS8CMC4	88103411
	Female thread	1/4" BSP	IB8NFC2	88103262	IBN8CFC2	88104534	-	-	IBS8CFC2	88103361
		3/8" BSP	IB8NFC3	88103270	IBN8CFC3	88104542	IBS8CCFC3	25010133	IBS8CFC3	88103379
		1/2" BSP	IB8NFC4	88103288	IBN8CFC4	88104559	IBS8CCFC4	25010141	IBS8CFC4	88103387
	For hose	Ø 8 mm	IB8NH08	88103320	-	-	IBS8CCH08	25010174	IBS8CH08	88103429
		Ø 10 mm	IB8NH10	88103338	IBN8CH10	88104609	IBS8CCH10	25010182	IBS8CH10	88103437
		Ø 13 mm	IB8NH13	88103346	IBN8CH13	88104617	IBS8CCH13	25010190	IBS8CH13	88103445
Ø 11 mm (1/2")						Max: 16 bar - 70 L/s ⁽¹⁾				
	Male thread	3/8" BSP	IB11NMC3	25014028	-	-	IBS11CCMC3	25013939	-	-
		1/2" BSP	IB11NMC4	25014036	-	-	IBS11CCMC4	25013947	-	-
		3/4" BSP	-	-	-	-	IBS11CCMC6	25013954	-	-
	Female thread	3/8" BSP	IB11NFC3	25014002	-	-	IBS11CCFC3	25013905	-	-
		1/2" BSP	IB11NFC4	25014010	-	-	IBS11CCFC4	25013913	-	-
		3/4" BSP	-	-	-	-	IBS11CCFC6	25013921	-	-
	For hose	10 mm	IB11NH10	25014044	-	-	IBS11CCH10	25013962	-	-
		13 mm	IB11NH13	25014051	-	-	IBS11CCH13	25013970	-	-
		16 mm	IB11NH16	25014069	-	-	IBS11CCH16	25013988	-	-
		19 mm	IB11NH19	25014077	-	-	IBS11CCH19	25013996	-	-

(1) Measured at 6 bar (87 psig) at inlet, with 10% pressure drop as per industry standard.

Accessories | Hoses

Polyurethane Recoil Hoses

- Operating temperature: -40 to +38°C
- Operating pressure: 8 bar (115 psi) at 24°C



Ref.	CCN	Min. hose diameter	NPT	max m	helix max m	helix min m
Yellow Hose						
34102	92833375	6	1/4"	3	2.5	0.15
34202	92833383	6	1/4"	6	5	0.31
34302	92833391	6	1/4"	9	8	0.43
35102	92833409	8	1/4"	3	2.5	0.14
35202	92832526	8	1/4"	6	5	0.30
35302	92833417	8	1/4"	9	8	0.46
IR36103	92835172	9.5	1/4"	3	2.5	0.15
IR36203	92835180	9.5	1/4"	6	5	0.34
IR36303	92835198	9.5	1/4"	9	8	0.52
IR36102	92835149	9.5	3/8"	3	2.5	0.15
IR36202	92835156	9.5	3/8"	6	5	0.34
IR36302	92835164	9.5	3/8"	9	8	0.52
IR37102	92835206	13	1/2"	3	2.5	0.16
IR37202	92835214	13	1/2"	6	5	0.38
Blue Hose						
IR36713	88098991	9.5	3/8"	6	5	0.34
IR36715	88099015	9.5	3/8"	9	7.5	0.52

Hose Whips



Ref.	CCN	NPT	mm
33104	91486340	1/4"	300
33204	91486357	3/8"	300
33304	91488205	1/2"	300

PVC Round Hose, 30 m Coil

Safety factor 4:1



Ref.	CCN	inside mm	outside mm	Max. operating pressure at 20°C
RH-6	92545730	6	11	18 bar
RH-8	92536036	8	13	15 bar
RH-10	92536044	10	14	13 bar
RH-12	92536051	13	17	11 bar
RH-16	92536069	16	21	11 bar
RH-19	92536077	19	24	11 bar

Hose Clamps



Ref.	CCN	mm	Quantity
CO-0911	56753080	Ø 9 – 11	100
CO-1113	56753098	Ø 11 – 13	100
CO-1315	56753106	Ø 13 – 15	100
CO-1518	56753122	Ø 15 – 18	100
CO-1821	56753148	Ø 18 – 21	100
CO-2225	56753163	Ø 22 – 25	100

Accessories | Lubricants

Lubricant Kits

Contains grease 80 g, oil 0.12 L and grease pump

67-LBK1

for angle head tools
CCN: 04637344

105-LBK1

for Impacttools™ with metal housing
CCN: 04616090

115-LBK1

for Impacttools™ with composite housing
CCN: 04616108



Ref.	CCN	No.	Description/Recommended use	Capacity
Grease				
67-4T	04637336			0.12 L (tube)
67-1LB	03773009	67	For angle head tools	0.45 kg
105-4T-6	04618930			6 tubes of 0.12 L
105-1LB	04279147	105	For Impacttools™ with metal housing	0.45 kg
105-8LB	04264875			3.60 kg
115-4T	04616157			0.12 L (tube)
115-1LB	04192480	115	For Impacttools™ with composite housing	0.45 kg
Oil				
1024	03875671			0.12 L (tube)
10P	03875689	10	For Impacttools™, drills, screwdrivers and percussive tools	0.50 L
10G	03875697			3.80 L
50P	03875705			0.50 L
50G	03875713	50	For grinders and Impacttools™	3.80 L

Index

426	61	7N7CCFC4	66
4429	62	7N7CCH06	66
		7N7CCH08	66
		7N7CCH10	66
		7N7CCH13	66
5		7N7CCMC2	66
50G	68	7N7CCMC3	66
50P	68	7N7CCMC4	66
5102MAX	40	7S7CCFC2	66
5108MAX	40	7S7CCFC3	66
529	62	7S7CCFC4	66
		7S7CCH06	66
6		7S7CCH08	66
631L	27	7S7CCH10	66
67-1LB	68	7S7CCH13	66
67-4T	68	7S7CCMC2	66
67-LBK1	68	7S7CCMC3	66
		7S7CCMC4	66
7		7S7CFC2	66
77NFC2	66	7S7CFC3	66
77NFC3	66	7S7CFC4	66
77NFC4	66	7S7CH06	66
77NH06	66	7S7CH08	66
77NH08	66	7S7CH10	66
77NH10	66	7S7CH13	66
77NH13	66	7S7CMC2	66
77NMC2	66	7S7CMC3	66
77NMC3	66	7S7CMC4	66
77NMC4	66		
7802A	59	8	
7802AKC	59	8101MAX	46
7802RA	59	8102MAX	46
7802RAKC	59	8103MAX	46
7802SA	62	8201MAX	46
7803A	59	8202MAX	46
7803AKC	59	8203MAX	46
7803RA	59		
7803RAKC	59	9	
7804XPA	58	94058	63
7807R-EU	59		
7N7CCFC2	66		
7N7CCFC3	66		
		B	
		BC1110-EU	13
		BC1121-EU	13
		BL1203	12
		BL2010	12
		BL2012	12
		BL2022	13
		C	
		CO-0911	67
		CO-1113	67
		CO-1315	67
		CO-1518	67
		CO-1821	67
		CO-2225	67
		D	
		D1130	10
		D1410	10
		D5140	10
		G	
		G1621	11
		I	
		IB11NFC3	66
		IB11NFC4	66
		IB11NH10	66
		IB11NH13	66
		IB11NH16	66
		IB11NH19	66
		IB11NMC3	66
		IB11NMC4	66
		IB6NFC2	66
		IB6NFC3	66
		IB6NH06	66
		IB6NH08	66
		IB6NH10	66
		IB6NMC2	66
		IB6NMC3	66



IB8NFC2	66	IBS6CCH10	66	L	
IB8NFC3	66	IBS6CCMC2	66	L1110	11
IB8NFC4	66	IBS6CCMC3	66	L5110	11
IB8NH08	66	IBS6CCMC4	66	LA158	19
IB8NH10	66	IBS6CFC2	66	LA410-EU	59
IB8NH13	66	IBS6CFC3	66	LA412-EU	60
IB8NMC2	66	IBS6CFC4	66	LA413-EU	60
IB8NMC3	66	IBS6CH06	66	LA415-EU	62
IB8NMC4	66	IBS6CH08	66	LA418A-EU	63
IBN6CFC2	66	IBS6CH10	66	LA421-EU	43
IBN6CFC3	66	IBS6CMC2	66	LA422-EU	43
IBN6CFC4	66	IBS6CMC3	66	LA428-EU	63
IBN6CH06	66	IBS6CMC4	66	LA429-EU	42
IBN6CH08	66	IBS8CCFC3	66	LA437-EU	63
IBN6CH10	66	IBS8CCFC4	66	LA439-EU	60
IBN6CMC2	66	IBS8CCH08	66	LUB5130	11
IBN6CMC3	66	IBS8CCH10	66		
IBN6CMC4	66	IBS8CCH13	66	R	
IBN8CFC2	66	IBS8CCMC3	66	R1120	9
IBN8CFC3	66	IBS8CCMC4	66	R1130	9
IBN8CFC4	66	IBS8CFC2	66	R3130	9
IBN8CH10	66	IBS8CFC3	66	R3150	9
IBN8CH13	66	IBS8CFC4	66	RH-10	67
IBN8CMC2	66	IBS8CH08	66	RH-12	67
IBN8CMC3	66	IBS8CH10	66	RH-16	67
IBN8CMC4	66	IBS8CH13	66	RH-19	67
IBS11CCFC3	66	IBS8CMC2	66	RH-6	67
IBS11CCFC4	66	IBS8CMC3	66	RH-8	67
IBS11CCFC6	66	IBS8CMC4	66		
IBS11CCH10	66	IR36102	67	W	
IBS11CCH13	66	IR36103	67	W1110	8
IBS11CCH16	66	IR36202	67	W1120	8
IBS11CCH19	66	IR36203	67	W1130	8
IBS11CCMC3	66	IR36302	67	W5111	7
IBS11CCMC4	66	IR36303	67	W5132	6
IBS11CCMC6	66	IR36713	67	W5152	6
IBS6CCFC2	66	IR36715	67	W5330	7
IBS6CCFC3	66	IR37102	67	W5350	7
IBS6CCFC4	66	IR37202	67	W7150EU	7
IBS6CCH08	66				





Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$12 billion global business committed to a world of sustainable progress and enduring results.



www.ingersollrandproducts.com

Distributed by:

Ingersoll Rand, IR, the IR logo, IQv20 Series, IQv12 Series, Impactool™ and Inline are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.

We are committed to using environmentally conscious print practices.

©2015 Ingersoll Rand IRITS-0409-041-0716_EUEN